


Drawing / Standard
【 Truss Head Screw (+) 】

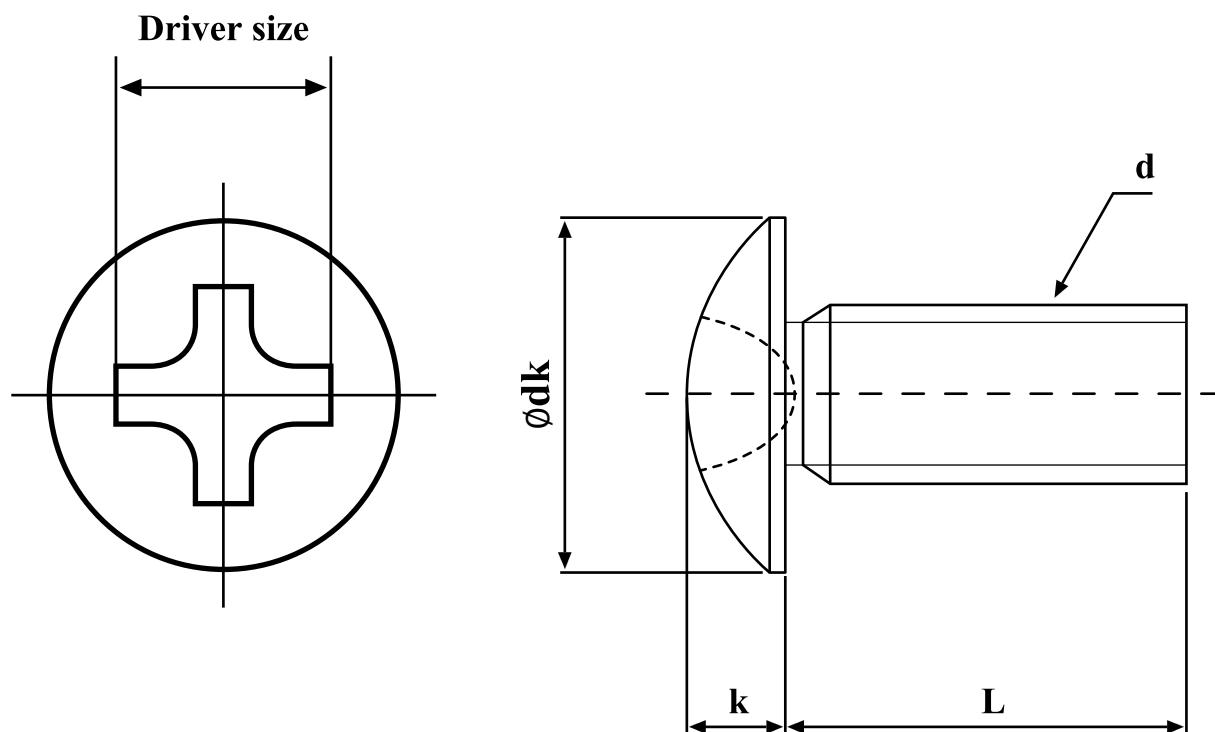

| Nominal size (d) | Pitch | Driver size | dk | | k | |
|------------------|-------|-------------|-----------|-----------|-----------|-----------|
| | | | Dimension | Tolerance | Dimension | Tolerance |
| M2 | 0.4 | 1 | 4.5 | 0 -0.4 | 1.2 | ± 0.1 |
| M2.3 | 0.4 | | 5.2 | | 1.4 | |
| M2.5 | 0.45 | | 5.7 | | 1.5 | |
| M2.6 | 0.45 | | 5.9 | | 1.6 | |
| M3 | 0.5 | 2 | 6.9 | 0 -0.5 | 1.9 | ± 0.15 |
| M3.5 | 0.6 | | 8.1 | | 2.2 | |
| M4 | 0.7 | | 9.4 | | 2.5 | |
| M5 | 0.8 | | 11.8 | 0 -0.6 | 3.1 | |
| M6 | 1.0 | 3 | 14 | 0 -0.7 | 3.7 | ± 0.2 |
| M8 | 1.25 | | 17.8 | 0 -0.8 | 4.8 | |
| M10 | 1.5 | 4 | 21 | 0 -1.0 | 5.1 | ± 0.4 |
| M12 | 1.75 | | 24 | 0 -1.5 | 6.0 | ± 0.5 |
| M16 | 2.0 | | 30 | | 9.0 | |