


図面／規格
【CAP】

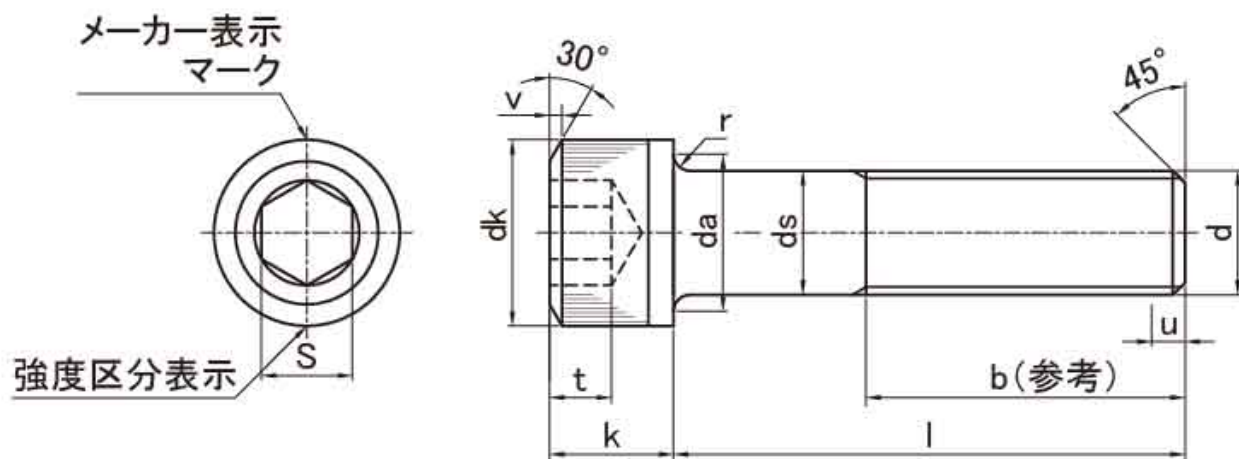

不完全ネジ部 $U \leq 2P$

[単位:mm]

ねじの呼び(d)	M1.4	M1.6	M2	M2.5	M2.6	M3	M4	M5	M6	M8	M10	M12	(M14)	M16	(M18)	M20	M24	M30	M36	M42
ピッチ(P)	0.3	0.35	0.4	0.45	0.45	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2	2.5	2.5	3	3.5	4	4.5
b 参考	14	15	16	17	17	18	20	22	24	28	32	36	40	44	48	52	60	72	84	96
最大(基準寸法)(1)	2.6	3.0	3.8	4.5	4.5	5.5	7	8.5	10	13	16	18	21	24	27	30	36	45	54	63
dk 最大(2)	2.74	3.14	3.98	4.68	4.68	5.68	7.22	8.72	10.22	13.27	16.27	18.27	21.33	24.33	27.33	30.33	36.39	45.39	54.46	63.46
dk 最小	2.46	2.86	3.62	4.32	4.32	5.32	6.78	8.28	9.78	12.73	15.73	17.73	20.67	23.67	26.67	29.67	35.61	44.61	53.54	62.54
da 最大	1.8	2.0	2.6	3.1	3.2	3.6	4.7	5.7	6.8	9.2	11.2	13.7	15.7	17.7	20.2	22.4	26.4	33.4	39.4	45.6
ds 最大(基準寸法)	1.4	1.6	2	2.5	2.6	3	4	5	6	8	10	12	14	16	18	20	24	30	36	42
ds 最小	1.26	1.46	1.86	2.36	2.46	2.86	3.82	4.82	5.82	7.78	9.78	11.73	13.73	15.73	17.73	19.67	23.67	29.67	35.61	41.61
e 最小	1.5	1.733	1.733	2.303	2.303	2.873	3.443	4.583	5.723	6.863	9.149	11.429	13.716	15.996	15.996	19.437	21.734	25.154	30.854	36.571
k 最大(基準寸法)	1.4	1.6	2	2.5	2.6	3	4	5	6	8	10	12	14	16	18	20	24	30	36	42
k 最小	1.26	1.46	1.86	2.36	2.46	2.86	3.82	4.82	5.70	7.64	9.64	11.57	13.57	15.57	17.57	19.48	23.48	29.48	35.38	41.38
r 最小	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.25	0.4	0.4	0.6	0.6	0.6	0.6	0.8	0.8	1	1	1.2
s 呼び(基準寸法)	1.3	1.5	1.5	2	2	2.5	3	4	5	6	8	10	12	14	14	17	19	22	27	32
s 最大	1.36	1.56	1.58	2.08	2.08	2.58	3.08	4.095	5.14	6.14	8.175	10.175	12.212	14.212	14.212	17.23	19.275	22.275	27.275	32.33
s 最小	1.32	1.52	1.52	2.02	2.02	2.52	3.02	4.02	5.02	6.02	8.025	10.025	12.032	14.032	14.032	17.050	19.065	22.065	27.065	32.08
t 最小	0.6	0.7	1	1.1	1.1	1.3	2	2.5	3	4	5	6	7	8	9	10	12	15.5	19	21
v 最大	0.14	0.16	0.2	0.25	0.25	0.3	0.4	0.5	0.6	0.8	1	1.2	1.4	1.6	1.8	2	2.4	3	3.6	4.2

(1) ローレットなしの最大径 (2) ローレット付きの最大径