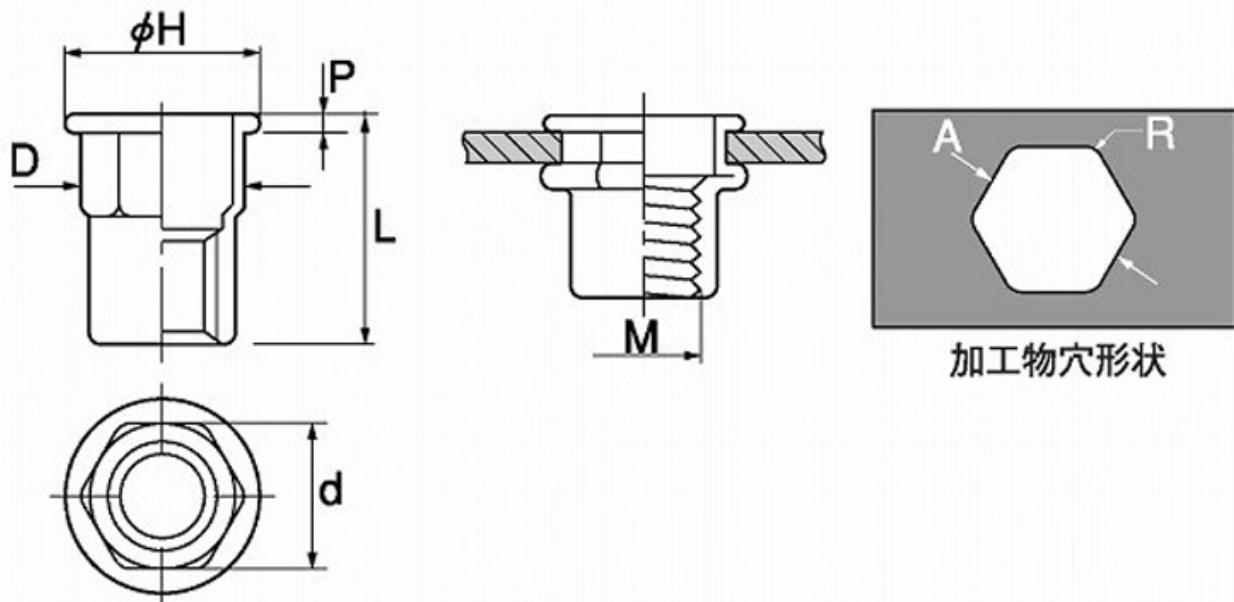


図面／規格  
【POP nut APH (Hexa A)】

SPH■HEX  
APH■HEX

ねじの呼び M	加工物 穴寸A (mm)	ナット No.■	推奨接着 板 厚 (mm)	L (mm)	D (mm)	d (mm)	H (mm)	P (mm)	参考強度			
									使用トルク (N·m)		ネジ剪断 (kN)	
									スチール	アルミ	スチール	アルミ
M4 x 0.7	6.1	415	0.5-1.5	10.3	6.4	6.0	9.3	0.8	4.4	3.4	7.4	4.9
		425	1.5-2.5	11.3								
		435	2.5-3.5	12.3								
M5 x 0.8	7.1	515	0.5-1.5	11.5	7.5	7.0	10.3	1.0	10.8	6.9	10.8	6.7
		525	1.5-2.5	12.5								
		535	2.5-3.5	13.5								
M6 x 1.0	9.1	625	0.5-2.5	15.0	9.6	9.0	12.3	1.5	16.7	13.7	17.7	10.8
		640	2.5-4.0	16.5								
M8 x 1.25	11.1	825	1.0-2.5	16.5	11.9	11.0	14.3	1.5	27.5	25.5	25.5	15.7
		840	2.5-4.0	18.0								