


図面／規格
【Plug SH (square head)】

テーパ1/16 (3° 34')

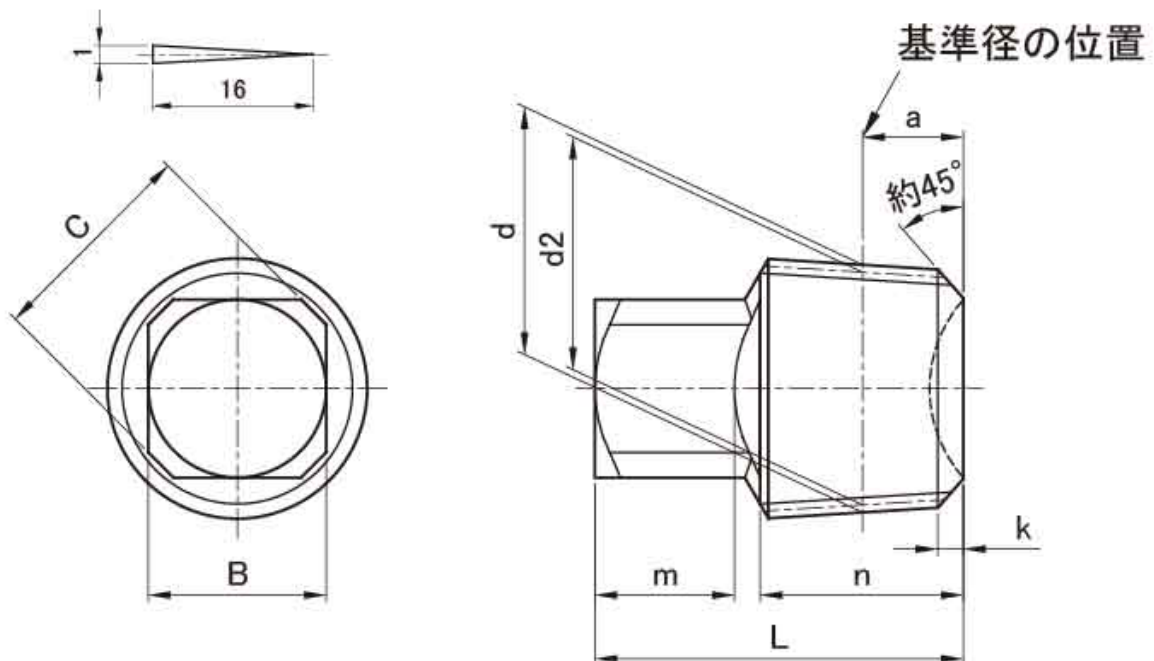

四角頭付 (SH型) プラグの寸法・精度

[単位: mm]

呼びとねじ山数		R1/8-28	R1/4-19	R3/8-19	R1/2-14	R3/4-14
基準径	外径d	9.728	13.157	16.662	20.955	26.441
	有効径d2	9.147	12.301	15.806	19.793	25.279
	位置a	3.97±0.91	6.01±1.34	6.35±1.34	8.16±1.81	9.53±1.81
B		7 ⁰ _{-0.2}	9 ⁰ _{-0.2}	12 ⁰ _{-0.25}	14 ⁰ _{-0.25}	17 ⁰ _{-0.25}
C(最小)		8.5	11.0	14.7	17.2	22.0
L		15±0.4	19±0.4	21±0.4	25±0.5	29±1
m(最小)		5.5	6.5	7.0	7.5	8.0
n		8.0	11.0	12.0	15.0	17.0
k(約)		1.0	1.4	1.4	1.9	1.9