


図面／規格
【Weld bolt (with protrusion)】

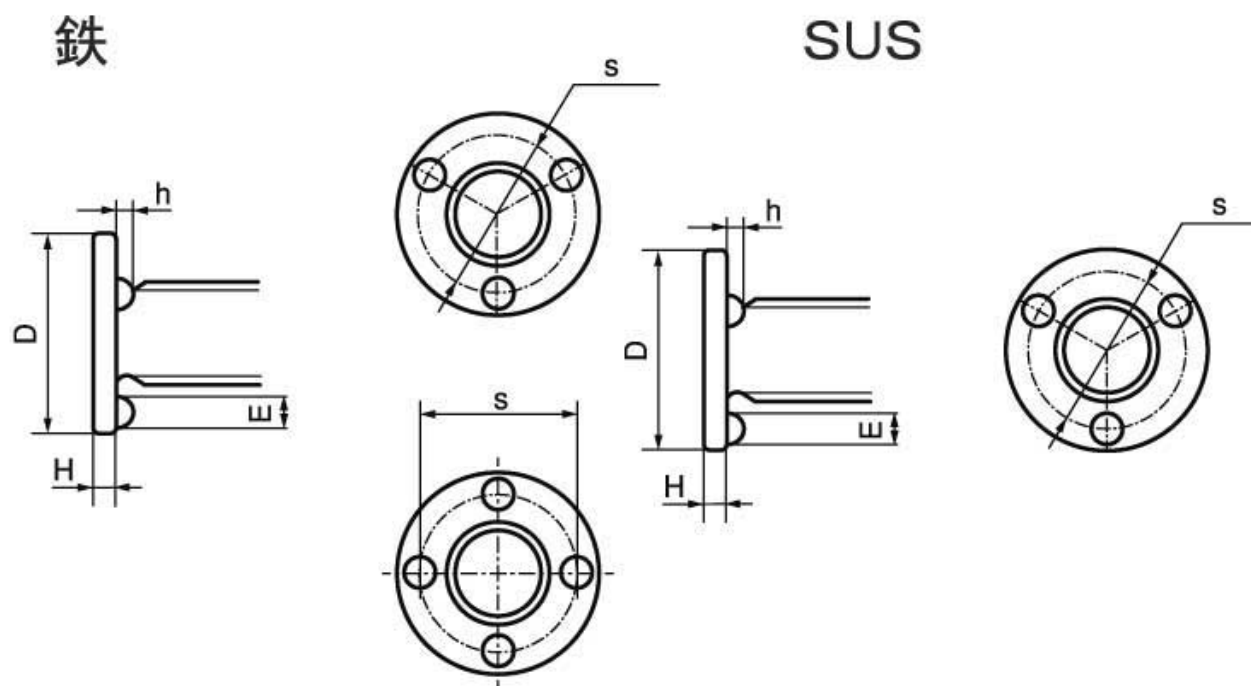

鉄

ねじの呼び	突起数	D		H		S	E	h
		基準寸法	許容差	基準寸法	許容差			
M4	3	10	0	1.3	±0.2	7	1.5	0.8
M5		12	-0.5	1.8		8	2.0	0.8
M6	4	14	±0.5	2.0		10.5	2.2	1.0
M8		17	0 -0.8	2.5	±0.3	13	2.5	1.3
M10		19		3.0		14	3.0	1.5
M12		24		3.5		19	3.5	1.5

SUS

ねじの呼び	突起数	D		H		S	E	h
		基準寸法	許容差	基準寸法	許容差	最大		
M4	3	10	±0.4	1.3	±0.2	8.5	1.5	0.7
M5		12		1.8		10	2	0.7
M6		14		2.0		11.5	2.5	0.8
M8		18		2.5		15	3	0.8
M10		22		3.5		18	4	1.0