


図面／規格
【Spring washer (No. 2)】

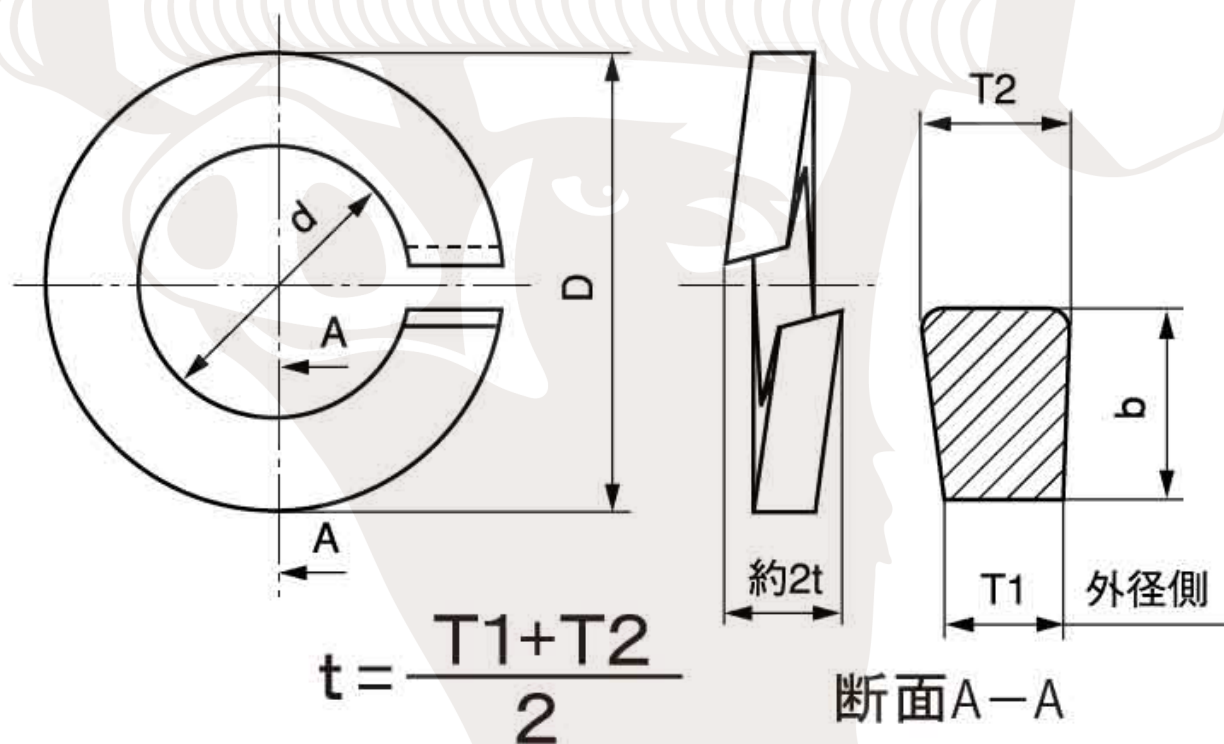

呼び		内径 (d)		外径 (D)	幅 (b) × 厚さ (t)	
メートル ねじ用	ウィット ねじ用	基準 寸法	許容差			
2	—	2.1	+0.25	4.4	0.9	0.5
2.3	—	2.4	0	4.9	1	0.6
2.5	—	2.6	+0.3	5.2	1	0.6
2.6	—	2.7		5.3	1	0.6
3	—	3.1		5.9	1.1	0.7
3.5	—	3.6	0	6.6	1.2	0.8
4	—	4.1		7.6	1.4	1
5	—	5.1		9.2	1.7	1.3
6	—	6.1	+0.4	12.2	2.7	1.5
—	1/4	6.5		12.8	2.8	1.6
7	—	7.1		13.4	2.8	1.6
8	5/16	8.2	+0.5	15.4	3.2	2
—	3/8	9.8		17.8	3.6	2.4
10	—	10.2		18.4	3.7	2.5
—	7/16	11.4	0	20.2	4	2.8
12	—	12.2		21.5	4.2	3
—	1/2	13		22.7	4.4	3.2
14	—	14.2	+0.6	24.5	4.7	3.5
16	5/8	16.2		28	5.2	4
18	—	18.2		31	5.7	4.6
—	3/4	19.5	+0.8	32.7	5.9	4.8
20	—	20.2		33.8	6.1	5.1
22	7/8	22.5		37.7	6.8	5.6

呼び		内径 (d)		外径 (D)	幅 (b) × 厚さ (t)	
メートル ねじ用	ウィット ねじ用	基準 寸法	許容差			
24	—	24.5	+1.0	40.3	7.1	5.9
—	1"	26	0	42.8	7.5	6.4
27	—	27.5	+1.2	45.3	7.9	6.8
—	1"-1/8	29.3		47.9	8.3	7.1
30	—	30.5		49.9	8.7	7.5
—	1"-1/4	32.5	0	52.7	9.1	7.9
33	—	33.5		54.7	9.5	8
—	1"-3/8	35.8		57.8	9.9	8.7
36	—	36.5	+1.4	59.1	10.2	9
39	1"-1/2	39.5		63.1	10.7	9.5
42	—	45		65	10	8
45	—	48	+0	72	12	9
48	—	51		75	12	9
52	—	55		79	12	9
56	—	60	+0	85	12	9
60	—	63		88	12	9
64	—	68		92	12	9
68	—	72	-3.0	96	12	9.2
72	—	76		100	12	9.2
76	—	80		106	12.6	9.2
80	—	85	+0	111	12.6	9.2
90	—	95		121	12.6	9.2
100	—	105		131	12.6	9.2