


図面／規格  
【U nut (with CAP)】

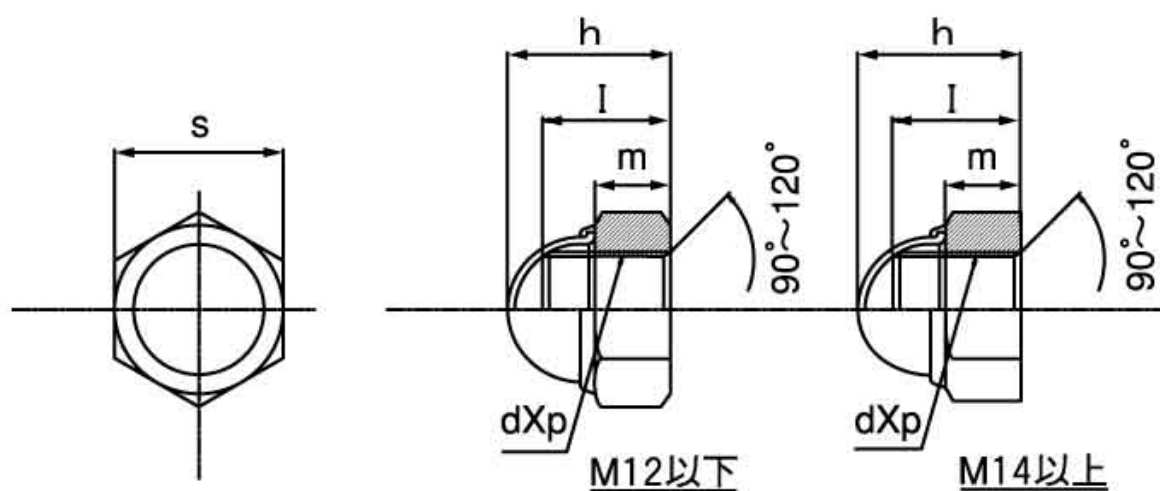

呼び径 (d)	ピッチ (p)	二面幅(s)		全高(h)		ねじ高さ (m) 約	(L)	
		基準 寸法	許容差	基準 寸法	許容差		最大	最小
M4	0.7	7	0 -0.2	7.2	±0.5	3	5.4	4.4
M5	0.8	8		9	±0.6	3.9	7.4	5.5
M6	1.0	10		10.5		4.2	7.9	6.2
M8	1.25	13	0 -0.25	13	±0.8	6.1	10.8	8.6
M10	1.5	17	0 -0.35	15.5		7.1	12.8	10.1
M12	1.75	19		19	±1	9	15.8	12.5
M14	2.0	22		24.5	±2	11	19.8	15
M16	2.0	24		26.5		13	20.8	17
M18	2.5	27		28.5		14	22.8	19
M20	2.5	30		31		15.4	24.8	20.4
M22	2.5	32	0 -0.4	34	±3	17.2	26.8	22.2
M24	3.0	36		41		18.8	33.7	24.8
M27	3.0	41		46		21.2	38.7	27.2
M30	3.5	46		51.5		24	44.7	31
M36	4.0	55	0 -0.45	60		29.5	51.7	37.5

※鉄は、M12以下は2種、M14以上は1種。ステンレスは、すべて1種。