


[Home](#)> [Products](#)> [Sanding flexible wheel](#) · [Fine Touch](#)

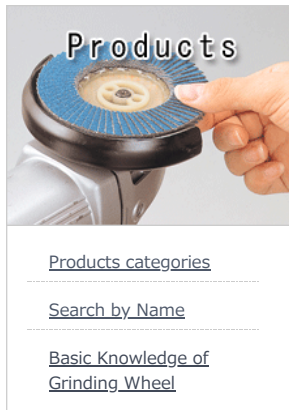

## Features

With proper flexibility and sharp edge are suitable for hard work such as angle surface.

Extensive grain sizes are available to various materials such as steel, stainless steel , aluminum, stone and glass.

## Applications

Light grinding and polishing of steel, stainless steel, aluminum steel (including surface grinding, curve grinding, chamfering and finishing spot welding)

## Specifications

Diameter (mm)	Thickness (mm)	Bore (mm)	Grain	Grit	Hardness	Packing Outer Box (pcs×inner box)	Maximum operation speed		
100	2	16	AC	36・46・ 60・80・ 100・120	-	200pcs (20pcs×10boxes)	72m/s (4,300m/min)		
			WA	60・80・ 120					
	3	16	AC	46・60					
			WA	36・60					
125	2	22	AC	46・60・ 80	-	50pcs (25pcs×2boxes)	72m/s (4,300m/min)		
			WA	60・80・ 120					
	3		AC	36・60					
			WA	46・60・ 80					
150	2	22	AC	46・60・ 80・100・ 120	-	50pcs (25pcs×2boxes)	72m/s (4,300m/min)		
			WA	46・60・ 80・120					
	3		AC	36・60・ 80					
			WA	80					
180	2	22	AC・WA	46・60・ 80・100・ 120・150・ 180	-	50pcs (25pcs×2boxes)	72m/s (4,300m/min)		
			C	80					
	3		AC	24・36・ 46・60・ 80					
			WA	36・46・ 60・80・ 120					
				C				24	G

			GC	60	-		
--	--	--	----	----	---	--	--

- ◆The unit of diameter, thickness and bore is the mm.
- ◆Each product lines are available in different sizes, please contact us.

Product Code

## Article



Working surface

## Package and backup Pad



Backup Pad  
Each inner box includes a backup pad.

## Precautions

Always use backup pad.

[▲ To TOP](#)

Copyright (c) NEWREGISTON Co., Ltd. All rights reserved.

[SYSTEM REQUIREMENTS](#)  
[SITE MAP](#)  
[PRIVACY POLICY](#)  
[CONTACT](#)