


図面／規格
【Bolt anchor (BA)】

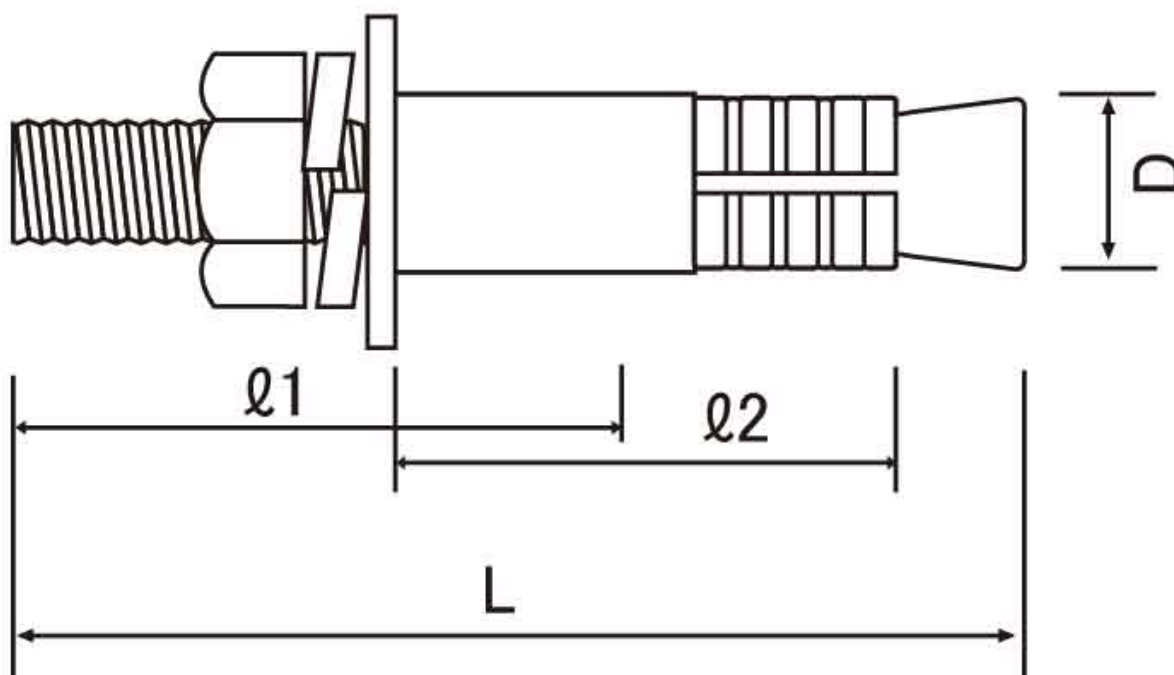

品番 鉄: BA SUS: SBA ドブ: BA-D

品番 鉄：BA-650 SBA-700 ドブ：BA-700																	
ねじの呼び	品番	アンカー外径 D			全長 L	ねじ長さ L1			スリーブ長さ L2		最大 取付物厚	穿孔径		アンカー 埋込み長さ		穿孔深さ	
		鉄	SUS	ドブ		鉄	SUS	ドブ	鉄	SUS/ドブ		鉄	SUS/ドブ	鉄	SUS/ドブ	鉄	SUS/ドブ
M6	BA-650	9.5			50	25			30		8	10.0		30		33	
M8	BA-865	12.0			65	35			35		15	12.5		35		39	
	BA-870				70	40					20						
M10	BA-1070	14.0			70	35	40	35	40		11	14.5		40		45	
	BA-1080				80	45	50	45			21						
	BA-1010				100	65	70	65			41						
	BA-1012				120	85	90	85			61						
	BA-1015				150	115	120	-			91						
M12	BA-1280	17.3			80	35	-	-	50		6	18.0		50		56	
	BA-1210				100	55					26						
	BA-1212				120	75					46						
	BA-1212S				125	-	75		-	60	36			-	60	-	67
	BA-1215				150	105			50		76			50		56	
	BA-1216				160	115					86						
	BA-1220				200	155					126						
M16	BA-1610	21.7			100	50			50		20	22.0		50		58	
	BA-1612				120	70			60		30			60		68	
	BA-1612S				125	-	75				35						
	BA-1615				150	100					60						
	BA-1616				160	110					70						
	BA-1620				200	150					110						
M20	BA-2016	25.4			160	100			80		40	26.0		80		90	
	BA-2017	-	27.2		170	-	100	100	-	75	50	-	28.0	-	75	-	88
	BA-2020	25.4	27.2		200	140	100	130	80	-	80	26.0	28.0	80	-	90	-
M22	BA-2220	-	32.0	31.8	200	-	120	110	-	90	62	-	33.0	-	90	-	103
M24	BA-2420	-	34.0		200	-	110	100	-	100	47	-	35.0	-	100	-	115
w3/8	BA-3070	14.0	-		70	35	-	-	40	-	11	14.5	-	40	-	45	-
	BA-3080		-		80	45	-	-		-	21		-		-		
w1/2	BA-4100	17.3	-		100	50	-	-	50	-	26	18.0	-	50	-	56	-