


Drawing / Standard
【Spring washer for CAP】

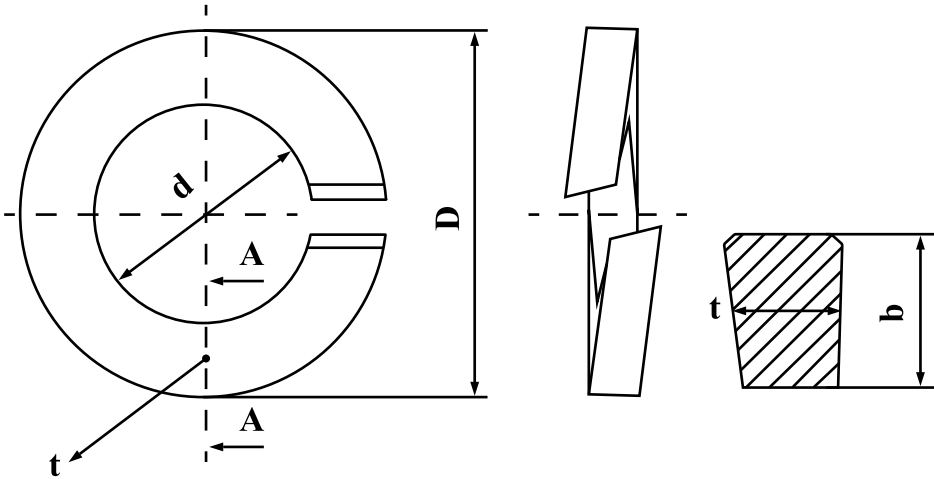

A-A

Norminal size	(d)		(D)	Width (b) x Thickness (t)	
	Diameter	Tolerance	Max.	Min.	
M3	M3	+0.3 0	5.6	1.0x1.0	
M4	M4	+0.4 0	7	1.2x1.2	
M5	M5		8.5	1.4x1.4	
M6	M6		10	1.6x1.6	
M8	M8	+0.5 0	13	2.0x2.0	
M10	M10		16	2.5x2.5	
M12	M12		18	2.5x2.5	
M14	M14	+0.6 0	21.1	3.0x3.0	
M16	M16		24.4	3.2x3.2	
M18	M18		27	3.5x3.5	
M20	M20	+0.8 0	30.6	4.5x4.5	
M22	M22		33	4.5x4.5	
M24	M24		36	5.0x5.0	

Norminal size	(d)		(D)	Width (b) x Thickness (t)	
	Diameter	Tolerance	Max.	Min.	
M27	27.5	+1.2 0	40	5.5x5.5	
M30	30.5		45	6.5x6.5	
M33	33.5	+1.4 0	50	7.3x7.0	
M36	36.5		54	8.0x7.0	
M39	39.5		58	8.0x7.0	
M42	42.7	+1.5 0	63	9.0x8.0	
M45	45.7		68	10.0x9.0	
M48	48.7		72	10.6x9.5	
M52	53.0	+1.6 0	78	10.6x9.5	
M56	57.0	+2.0 0	82	10.6x9.5	
w3/8	9.8	+0.5 0	14	1.8x1.8	
w1/2	13.0	+0.6 0	18	2.0x2.0	