


Drawing / Standard  
【Bumax 10.9 Hexagon bolt (Full-thread)】

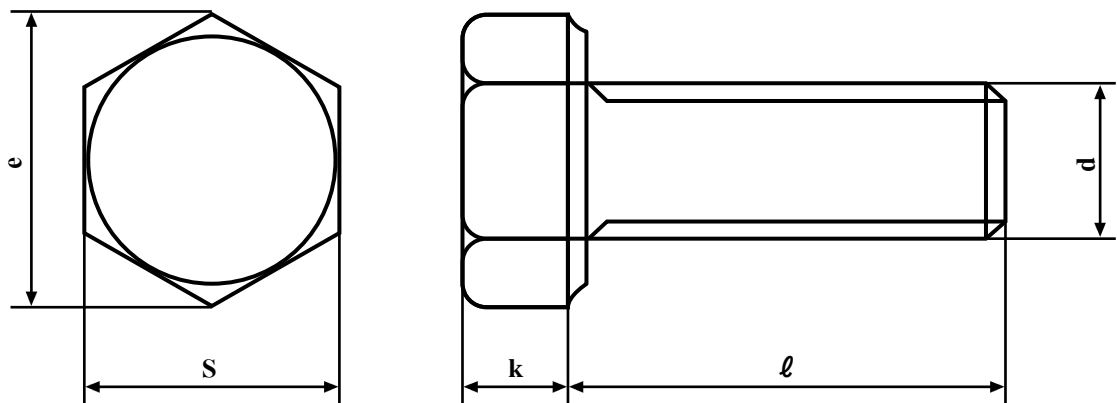

Normal size	Pitch	Head width		Height			Across flats
		s		k			e
d	Coarse screw	Basic dimension	Min.	Basic dimension	Max.	Min.	Min.
M4	0.7	7	6.78	2.8	2.925	2.675	7.66
M5	0.8	8	7.78	3.5	3.65	3.35	8.79
M6	1	10	9.78	4	4.15	3.85	11.05
M8	1.25	13	12.73	5.3	5.45	5.15	14.38
M10	1.5	※16	15.73	6.4	6.58	6.22	17.77
M12	1.75	※18	17.73	7.5	7.68	7.32	20.03
M14	2	※21	20.67	8.8	8.98	8.62	23.36
M16	2	24	23.67	10	10.18	9.82	26.75
M18	2.5	27	26.67	11.5	11.715	11.285	30.14
M20	2.5	30	29.67	12.5	12.715	12.285	33.53
M24	3	36	35.38	15	15.215	14.785	39.98
M27	3	41	40	17	17.35	16.65	45.2
M30	3.5	46	45	18.7	19.12	18.28	50.85
M36	4	22	53.8	22.5	22.92	22.08	60.79

Head width of M10, M12 and M14 denoted by the “※” mark are new JIS. They are slightly smaller than old JIS by 1mm.