


図面／規格 【Fine U nut】

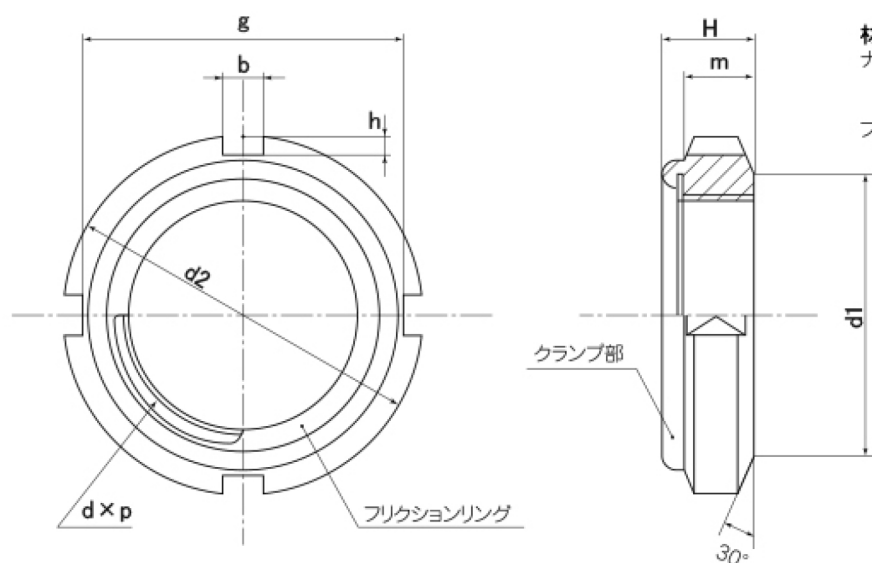

材質(標準品)

ナット本体…S45C(調質)または相当品
SS400または相当品
SUS304または相当品
フリクションリング SUS301

品番			ねじの呼び $d \times p$	d_1		d_2		H		m	b		h	g		端面の直角度 (最大)	おねじの余長 (最大)	単重 (g)
SCシリーズ (材質: S45C調質)	SSシリーズ (材質: SS400)	SUS シリーズ (材質: SUS304)		基準 寸法	許容差	基準 寸法	許容差	基準 寸法	許容差		基準 寸法	許容差		基準 寸法	許容差			
-	FUNM8SS	-	M8×0.75	12		16		5.3		4.3	3		1.5	13		0.05	5.8	4.1
FUN00SC	FUN00SS	FUN00SUS	M10×0.75	13.5		18		5.2	±0.3	4	3		1.8	14.4			5.5	4.5
FUN01SC	FUN01SS	FUN01SUS	M12×1.0	17		22		5.4		4	3		1.8	18.4			6	8
FUN02SC	FUN02SS	FUN02SUS	M15×1.0	21		25		6.5		5	4		1.8	21.4			7	12
FUN03SC	FUN03SS	FUN03SUS	M17×1.0	24		28		6.4	±0.5	5	4		1.9	24.2			7	13
FUN04SC	FUN04SS	FUN04SUS	M20×1.0	26		32		7.7		6	4		1.8	28.4			8	23
FUN05SC	FUN05SS	FUN05SUS	M25×1.5	32		38		9.1		7	5		2	34			10	36
FUN06SC	FUN06SS	FUN06SUS	M30×1.5	38		45		9.1		7	5		2	41			10	45
FUN07SC	FUN07SS	FUN07SUS	M35×1.5	44	0	52		10.2	±0.8	8	5		2	48			11	70
FUN08SC	FUN08SS	FUN08SUS	M40×1.5	50	-0.5	58		11.2		9	6	±0.2	2.5	53			12	95
FUN09SC	FUN09SS	FUN09SUS	M45×1.5	56		65		12.5		10	6		2.5	60			13	130
FUN10SC	FUN10SS	FUN10SUS	M50×1.5	61		70		13.5		11	6		2.5	65			14	160
FUN11SC	FUN11SS	FUN11SUS	M55×2.0	67		75		13.5	±1.0	11	7		3	69		0.07	15	185
FUN12SC	FUN12SS	FUN12SUS	M60×2.0	73		80		13.5		11	7		3	74			15	190
FUN13SC	FUN13SS	FUN13SUS	M65×2.0	79		85		15.0		12	7		3	79			16	235
FUN14SC	FUN14SS	FUN14SUS	M70×2.0	85		92	0	15.0		12	8		3.5	85	0		16	265
FUN15SC	FUN15SS	FUN15SUS	M75×2.0	90	-0.5	98		15.8		13	8		3.5	91	-0.5		17	320
FUN16SC	FUN16SS	FUN16SUS	M80×2.0	95		105		18.6		15	8		3.5	98			19	430
FUN17SC	FUN17SS	FUN17SUS	M85×2.0	102		110		19.2		16	8		3.5	103			20	495
FUN18SC	FUN18SS	FUN18SUS	M90×2.0	108		120		20.3		16	10		4	112			20	630
FUN19SC	FUN19SS	FUN19SUS	M95×2.0	113		125		21.3	±1.5	17	10		4	117			21	725
FUN20SC	FUN20SS	FUN20SUS	M100×2.0	120		130		22.3		18	10		4	122			22	770
FUN21SC	-	-	M105×2.0	126		140		22.3		18	12		5	130		0.10	22	904
FUN22SC	-	-	M110×2.0	133		145		23.3		19	12		5	135			23	954
FUN23SC	-	-	M115×2.0	137	0	150		23.3		19	12	±0.3	5	140			23	1030
FUN24SC	-	-	M120×2.0	138	-0.75	155		24.3		20	12		5	145			24	1080
FUN25SC	-	-	M125×2.0	148		160		25.4		21	12		5	150			25	1170
FUN26SC	-	-	M130×2.0	149		165		25.4		21	12		5	155			25	1250
FUN27SC	-	-	M135×2.0	160		175		26.6		22	14		6	163			26	1586
FUN28SC	-	-	M140×2.0	160		180		26.6	±2.0	22	14		6	168			26	1748
FUN29SC	-	-	M145×2.0	171		190		26.6		24	14		6	178			28	2000
FUN30SC	-	-	M150×2.0	171		195		28.3		24	14		6	183			28	2050