


図面／規格 【C-shaped retaining ring (for holes (Tayo))】

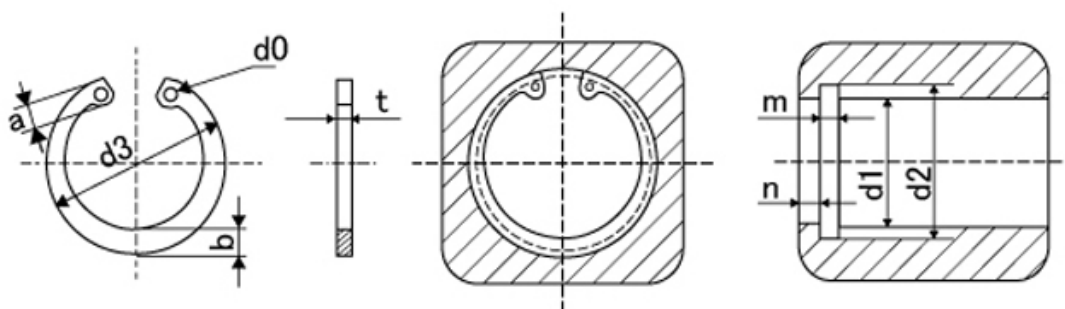

サイズ NO.	d3		止 め 輪				d0		参考		適用する穴		参考	
	公差	許容差	公差	約	約	最小	公差	約	d4	d1	公差	許容差	公差	許容差
8-4	6.9		0.4	0.85	1.6	0.8	3.5	8	6.7		±0.03	0.45	±0.1	1.0
8	8.6	±0.15	0.6	1.0	2.1	1.0	4	9	10.0	±0.05	0.7	0		
9-5	10.3			1.5	2.8		4	10	10.4					
10	10.7			1.5	3	1.2	4	11	11.4					
11	11.8	±0.18		1.7	3.1	1.5	6	13	13.6	±0.11	0			
12	13			1.9	3.6		7	14	14.6					
13	14.1			1.9	3.6		8	15	15.7					
14	15.1			1.9	3.7	1.7	8	16	16.8					
15	16.2			2.4	4		11	19	20					
16	17.3	±0.05		2.5	4		12	20	21					
17	18.3			2.5	4.1		12	21	22					
18	19.5			2.5	4.1		13	22	23	±0.21	0			
19	20.5	±0.2		2.5	4.3	2	15	24	25.2					
20	21.5			3	4.6		16	25	26.2					
21	22.5			3	4.6		16	26	27.2					
22	23.5			3	4.6		18	28	29.4					
23				3	4.7		20	30	31.4					
24	25.9	±0.25		3.5	5.2		21	32	33.7					
25	26.9			3.5	5.2		23	34	35.7					
26	27.9			3.5	5.2		24	35	37					
28	30.1			3.5	5.2		25	36	38	±0.25	0			
30	32.1	±0.25		4	5.3	2.5	27	38	40					
32	34.4			4	5.6		30	42	44.5					
34	36.5			4.5	5.9		33	45	47.5					
35	37.6	±0.4		4.5	6.1		33	46	48.5					
36	38.8			4.5	6.2		34	47	49.5					
37	39.8			4.5	6.5		35	48	50.5	±0.3	0			
38	40.8	±0.45		5.1	6.5		38	52	55					
40	43.5			5.1	6.5		41	55	58					
42	45.5			5.1	6.8		42	56	59					
45	48.5	±0.4		5.1	6.8		44	58	61					
46	49.7	±0.45		5.5	6.9		46	60	63					
47	50.5			5.5	6.9	2.5	48	62	65	±0.3	0			
48	51.5			5.5	7		50	65	68					
50	54.2	±0.45		6	7.4		53	68	71					
52	56.2			6	7.4		55	70	73					
55	59.2			6.6	7.4		57	72	75					
56	60.2			6.6	7.8		60	75	78					
58	62.2	±0.45		6.6	8		62	78	81					
60	64.2			7	8		64	80	83.5					
62	66.2			7	8		66	82	85.5					
63	67.2			7.6	8.2		69	85	88.5					
65	69.2			7.6	8.3		71	88	91.5	±0.35	0			
68	72.5	±0.55		8	8.5		73	90	93.5					
69	73.5			8	8.5		74	92	95.5					
70	74.5			8.3	8.8	3	77	95	98.5					
72	76.5			8.3	8.8		80	98	101.5					
75	79.5	±0.55		9	9		100	103.5						
78	82.5			9	9		102	106						
80	85.5			8.9	9.1		105	109						
82	87.5			10.2	10.2		110	114	±0.54	0				
85	90.5	±0.65		10.2	10.2		112	116						
88	93.5			9.5	10.2		115	119						
90	95.5			10	10.7		120	124						
92	97.5			10	10.7		125	129						
95	100.5	±0.55		10.7	10.7		130	134						
98	103.5			10.8	11	3.5	135	139						
100	105.5			11.5	11.8		140	144						
102	108			11.5	11.8		145	149	±0.63	0				
105	112	±1.26		12.5	12.7		150	155						
110	117	±0.83		12.5	13		155	160						
112	119			13.5	13.5		160	165						
115	122			14	14		165	170						
120	127	±0.65					170	175						
125	132						175	180						
130	137						180	185						
135	142						185	190	±0.72	0				
140	147						190	195						
145	152	±1.26					195	200						
150	158	±0.83					200	205						
155	164													
160	169													
165	174.5													
170	179.5													
175	184.5													
180	189.5													
190	199.5	±1.44												
195	204.5	±0.72												
200	209.5													