


図面／規格  
【Round S retaining ring (Ochiai)】

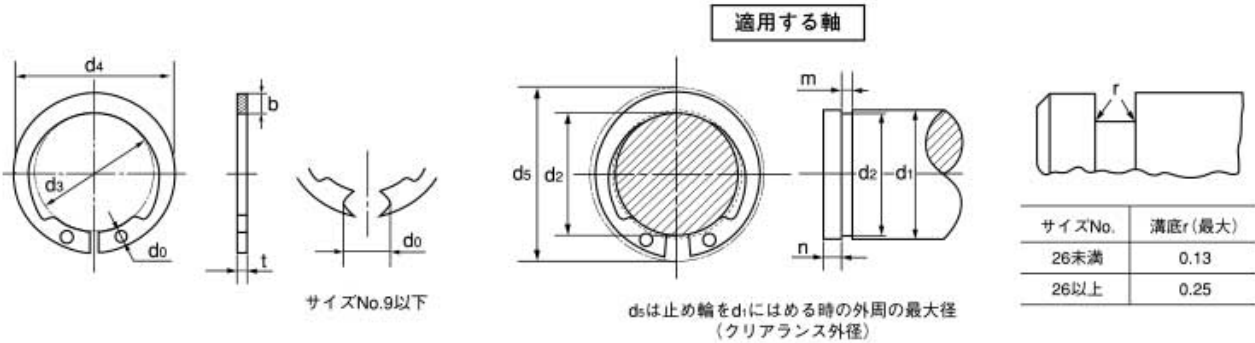

単位：mm

サイズNo.	止 め 輪						適 用 す る 軸									
	d <sub>3</sub>		d <sub>4</sub>	t	b		d <sub>0</sub>	公 差	d <sub>5</sub>	d <sub>1</sub>		d <sub>2</sub>		m	n	
	基本寸法	公 差	(参考)	基本寸法	公差					基本寸法	公 差	基本寸法	公 差	公 差	最小	
ISTW-	6	5.6		8	0.5	±0.03	1.2	2.2	±0.2	8.9	6	5.7	0.04	0.6	+0.1	1.5
	7	6.5	+0.1	9.3	0.6		1.4	2.6		10.3	7	6.7	0	0.7	0	1.5
	8	7.4	-0.2	10.6	0.7	±0.04	1.6	3		11.7	8	7.6	-0.06	0.8		1.5
	9	8.4		12	0.8		1.8	3.4	13.1	9	8.6		0.95		1.5	
	10	9.3	±0.15	13.3	1		2	1.2	14.5	10	9.6	0.09	1.15		1.5	
	11	10.2		14.4	1		2.1	1.2	16	11	10.5		1.15		1.5	
	12	11.1		15.5	1		2.2	1.2	17.2	12	11.5		1.15		1.5	
	13	12		16.6	1	±0.05	2.3	1.2	18.4	13	12.4		1.15		1.5	
	14	12.9		17.5	1		2.3	1.2	19.4	14	13.4	0	1.15		1.5	
	15	13.8	±0.18	18.6	1		2.4	1.2	20.6	15	14.3	-0.11	1.15		1.5	
	16	14.7		19.7	1		2.5	1.2	21.8	16	15.2		1.15		1.5	
	17	15.7		20.9	1		2.6	1.2	23	17	16.2		1.15		1.5	
	18	16.5		21.9	1.2		2.7	1.5	24.2	18	17		1.35		1.5	
	19	17.5		23.1	1.2		2.8	1.5	25.4	19	18		1.35		1.5	
	20	18.5		24.3	1.2		2.9	1.5	27	20	19		1.35		1.5	
	21	19.5		25.5	1.2		3	1.5	28	21	20		1.35		1.5	
	22	20.5		26.5	1.2		3	1.5	29	22	21		1.35		1.5	
	24	22.2		28.6	1.2		3.2	1.5	31.5	24	22.9	0	1.35		1.7	
	25	23.2	±0.2	29.8	1.2	±0.06	3.3	1.5	33	25	23.9	-0.21	1.35		1.7	
	26	24.2		31	1.2		3.4	1.5	34	26	24.9		1.35		1.7	
	28	25.9		33.1	1.5		3.6	1.8	36.5	28	26.6		1.65		2.1	
	30	27.9		35.3	1.5		3.7	1.8	38.5	30	28.6		1.65		2.1	
	32	29.6		37.4	1.5		3.9	1.8	41	32	30.3		1.65	+0.14	2.6	
	34	31.5		39.7	1.5		4.1	1.8	43.5	34	32.3		1.65	0	2.6	
35	32.2	±0.25	40.6	1.5		4.2	1.8	45	35	33		1.65		3		
36	33.2		41.6	1.75		4.2	2	46	36	34		1.9		3		
38	35.2		44	1.75		4.4	2	48	38	36	0	1.9		3		
40	37		46.2	1.75		4.6	2	51	40	38	-0.25	1.9		3		
42	38.5		48.1	1.75		4.8	2	54	42	39.5		1.9		3.8		
45	41.5	±0.4	51.3	1.75		4.9	2	57	45	42.5		1.9		3.8		
48	44.5		55.1	1.75		5.3	2	61	48	45.5		1.9		3.8		
50	45.8		56.8	2	±0.07	5.5	2.5	63	50	47		2.2		4.5		
52	47.8		59	2		5.6	2.5	65	52	49		2.2		4.5		
55	50.8		62.6	2		5.9	2.5	69	55	52		2.2		4.5		
58	53.8		66	2		6.1	2.5	72	58	55		2.2		4.5		
60	55.8		68.4	2		6.3	2.5	75	60	57		2.2		4.5		
62	57.8		70.8	2		6.5	2.5	77	62	59		2.2		4.5		
63	58.8	±0.45	72	2		6.6	2.5	78	63	60	0	2.2		4.5		
65	60.8		74.4	2.5		6.8	3	81	65	62	-0.3	2.7		4.5		
68	63.5		77.5	2.5		7	3	84	68	65		2.7		4.5		
70	65.5		79.9	2.5	±0.08	7.2	3	87	70	67		2.7		4.5		
75	70.5		85.7	2.5		7.6	3	92	75	72		2.7		4.5		
80	74.5		90.5	2.5		8	3	98	80	76.5		2.7		5.3		

材質:ばね鋼 硬さ:44~52HRC 表面処理:ACP(磷酸塩被膜)