


図面／規格  
**【Ryomaru key (JIS (made by Seiki SS))】**

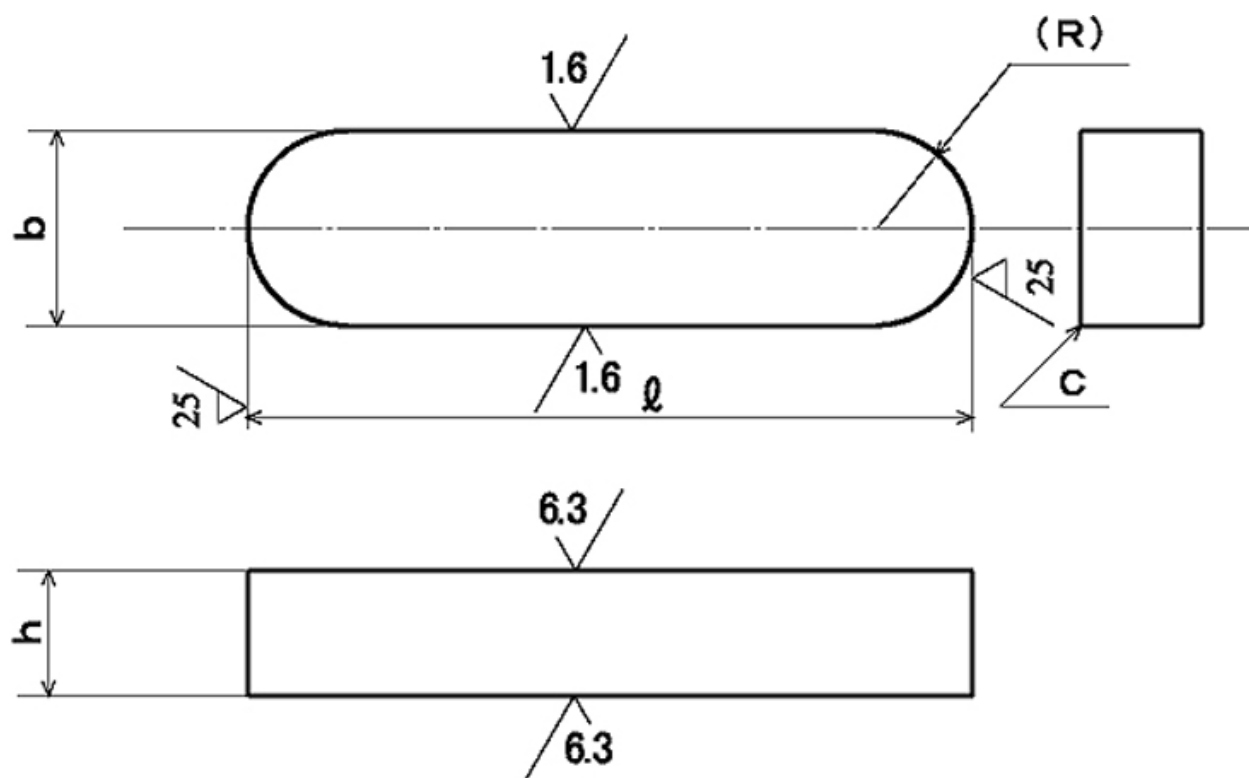

キーの 呼び 寸法 b×h	キーの寸法										
	b		h			c	l				
	基準寸法	許容差 (h9)	基準寸法	許容差							
2×2	2	0	2	0	h9	0.16	6～20				
3×3	3	-0.025	3	-0.025		~	6～36				
4×4	4	0 -0.03	4	0		0.25	8～45				
5×5	5		5	-0.03		0.25	10～56				
6×6	6		6	-0.03			14～70				
(7×7)	7	0 -0.036	7	0 -0.036	0.4	16～80					
8×7	8		7	h11		0.4 ~ 0.6	18～90				
10×8	10		8		0 -0.09		0.4 ~ 0.6	22～110			
12×8	12	8	0 -0.09					0.4 ~ 0.6	28～140		
14×9	14	9							0 -0.09	0.4 ~ 0.6	36～160
(15×10)	15	10									0 -0.09
16×10	16	10		0 -0.09	0.4 ~ 0.6	45～180					
18×11	18	11	0 -0.09			0.4 ~ 0.6	50～200				
20×12	20	12					0 -0.09	0.4 ~ 0.6	56～220		
22×14	22	14							0 -0.09	0.4 ~ 0.6	63～250
(24×16)	24	16		0 -0.09	0.4 ~ 0.6						70～280
25×14	25	14	0 -0.09			0.4 ~ 0.6					70～280
28×16	28	16					0 -0.09	0.4 ~ 0.6			80～320
32×18	32	18							0 -0.09	0.4 ~ 0.6	90～360
		-0.062									