


図面／規格
【CT Anchor (CT)】

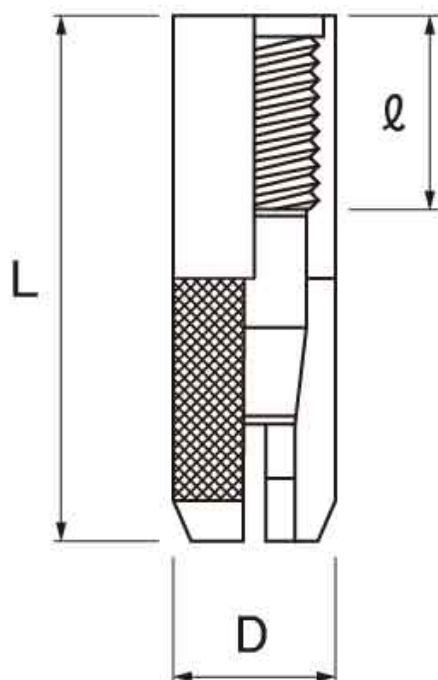

品 番	ねじの呼び	外 径 D	全 長 L	ねじ長さ l	ドリル径 (mm)	コンクリート強度21N/mm ² (210kgf/cm ²) kN(kgf)		埋込み深さ mm
						比例最大荷重	引張最大荷重	
CT-625	M6	8.0	25	10	8.5	5.6(580)	6.7(690)	25
830	M8	10.0	30	14	10.5	9.3(950)	10.7(1,100)	30
1040	M10	12.5	40	15	13.0	11.2(1,150)	15.6(1,600)	40
1070◆	M10	12.5	70	25	13.0	11.2(1,150)	15.6(1,600)	70 (40+仕上材厚30)
1250	M12	16.0	50	20	16.5	18.6(1,900)	24.5(2,500)	50
1280◆	M12	16.0	80	25	16.5	18.6(1,900)	24.5(2,500)	80 (50+仕上材厚30)
1660	M16	20.0	60	25	20.5	30.1(3,070)	35.7(3,650)	60
CT-2025	W1/4	8.0	25	10	8.5	5.6(580)	6.7(690)	25
2530	W5/16	10.0	30	14	10.5	9.3(950)	10.7(1,100)	30
3040	W3/8	12.0	40	15	12.5	9.8(1,000)	14.7(1,500)	40
3070◆	W3/8	12.5	70	25	13.0	11.2(1,150)	15.6(1,600)	70 (40+仕上材厚30)
4050	W1/2	16.0	50	20	16.5	18.6(1,900)	24.5(2,500)	50
4080◆	W1/2	16.0	80	25	16.5	18.6(1,900)	24.5(2,500)	80 (50+仕上材厚30)
5060	W5/8	20.0	60	25	20.5	30.1(3,070)	35.7(3,650)	60