


図面／規格
【Thin flat rivet】

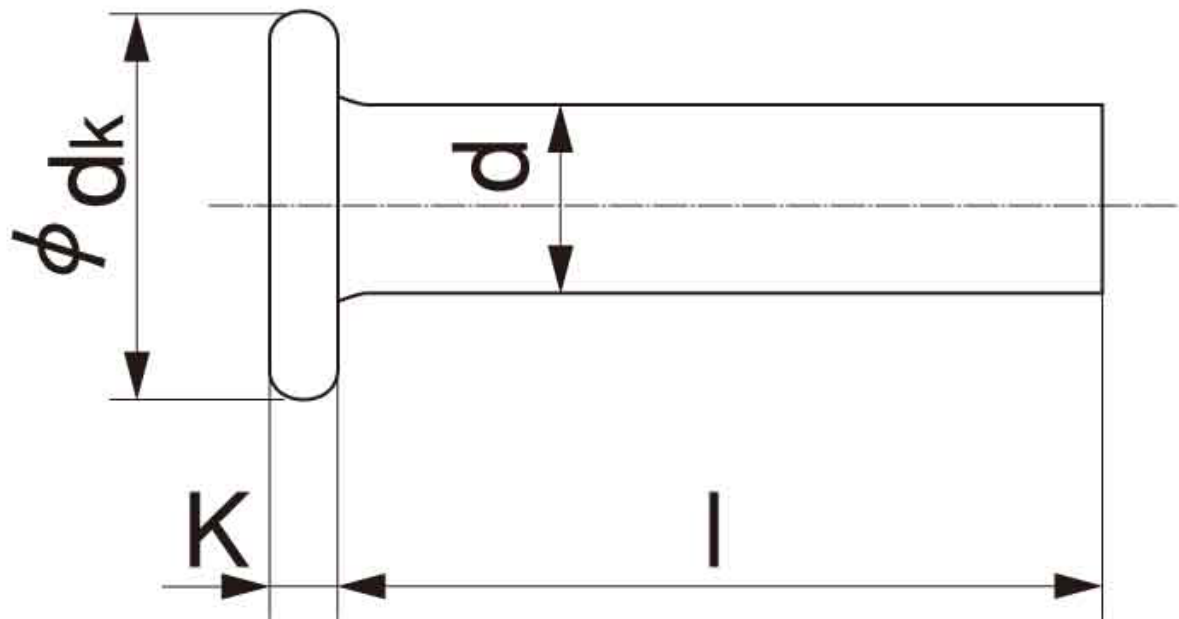

[単位:mm]

呼び径	軸径(d)		頭部直径(ϕdk)							頭部高(k)						
	基準寸法	許容差	鉄	許容差	ステンレス	許容差	真鍮	銅	アルミ	鉄	許容差	ステンレス	許容差	真鍮	銅	アルミ
1	1	+0.04 -0.02	2	+0 -0.2	-	-	-	2	2	0.3	+0.1 -0	-	-	-	0.3	0.3
1.2	1.2	+0.05 -0.02	2.4	+0 -0.2	-	-	-	2.4	2.4	0.4	+0.1 -0	-	-	-	0.4	0.4
1.6	1.6	+0.07 -0.02	3.2	+0 -0.2	-	-	-	3.2	3.2	0.5	+0.1 -0	-	-	-	0.5	0.5
2	2	+0.08 -0.02	4	+0 -0.3	4	+0 -0.3	4	4	4	0.7	+0.2 -0	0.7	+0.2 -0	0.7	0.7	0.7
2.5	2.5	+0.1 -0.03	-	-	5	+0 -0.3	-	-	-	-	-	0.9	+0.2 -0	-	-	-
3	3	+0.12 -0.03	6	+0 -0.4	6	+0 -0.4	6	6	6	1	+0.3 -0	1	+0.3 -0	1	1	1
4	4	+0.16 -0.04	8	+0 -0.4	8	+0 -0.4	8	8	8	1.3	+0.3 -0	1.3	+0.3 -0	1.3	1.3	1.3
4.5	4.5	+0.18 -0.05	9	+0 -0.5	9	+0 -0.5	9	9	9	1.5	+0.4 -0	1.5	+0.4 -0	1.5	1.5	1.5
5	5	+0.2 -0.05	10	+0 -0.5	10	+0 -0.5	10	10	10	1.6	+0.4 -0	1.6	+0.4 -0	1.6	1.6	1.6
6	6	+0.24 -0.06	12	+0 -0.5	12	+0 -0.5	12	12	12	2	+0.4 -0	2	+0.4 -0	2	2	2
8	8	+0.32 -0.08	15.5	± 0.5	15.5	± 0.5	-	16	16	3	± 0.2	3	± 0.2	-	2.5	2.5
10	10	+0.4 -0.08	20	+0 -0.6	-	+0 -0.6	-	-	-	3.3	+0.4 -0	-	-	-	-	-
12	12	+0.48 -0.08	24	+0 -0.6	-	+0 -0.6	-	-	-	4	+0.4 -0	-	-	-	-	-