


Drawing/Standard
【Den den eye bolt】

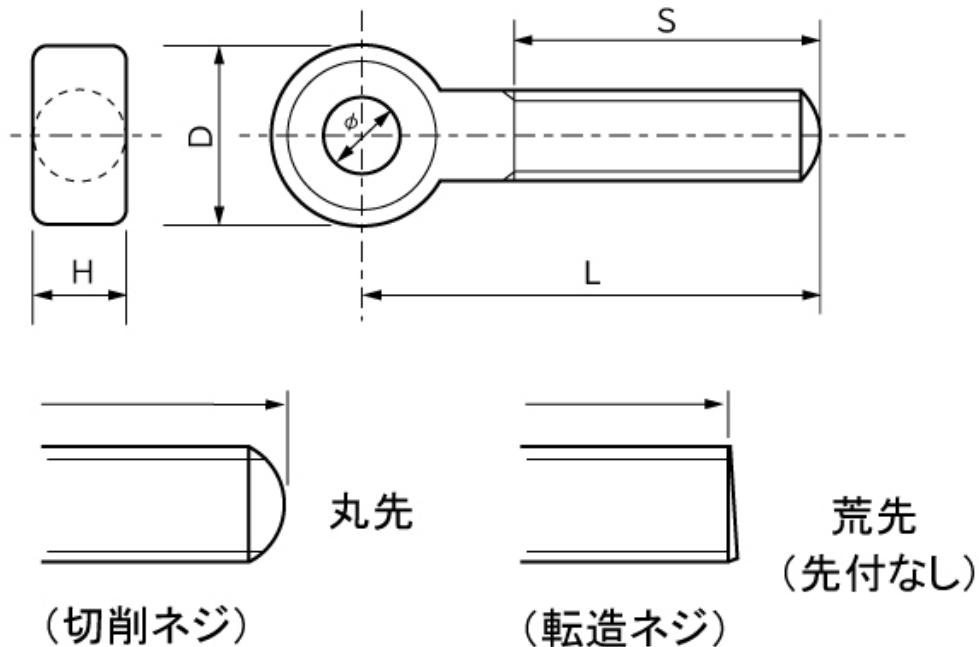

(規格品)		サイズ	製法	穴径 (L) ネジ長 (S) 公差 公差	外径 (D)	厚み (H)	SS-ST明記なき場合は共通		先付 種類
							穴 (φ)	穴面	
M6	80マデ	冷間 (ST-SS)	+1 + 3 -0 - 0	+0.3 -0.0	12	6	+0.3 -0.2	6.1 -0.2	+0.2 0.5C -0.1 LT
	80マデ	冷間 (ST-SS)	+1 + 3 -0 - 0	+0.4 -0.0	16	8	+0.3 -0.2	8.1 -0.1	+0.2 0.5C -0.1 LT
	85以上	冷間 (ST-SS)	+1 + 5 -0 - 0	+0.5 -0.5	16		+0.5 -0		+0.2 0.5C -0.1 LT
	100マデ	冷間 (ST-SS)	+1 + 5 -0 - 0	+0.5 -0.5	16		+0.5 -0		+0.2 0.5C -0.1 LT
	110以上	冷間 (ST-SS)	+1 + 5 -0 - 0	+0.5 -0.5	16		+0.5 -0		+0.2 0.5C -0.1 LT
	150マデ	熱間 (ST-SS)	+3 + 2 -0 - 0	+0.5 -0.2	16		+0.5 -0.2		+0.2 0.5C -0.1 LT
M8	80マデ	冷間 (ST-SS)	+1 + 3 -0 - 0	+0.5 -0.5	20	10	+0.5 -0	10.2 -0.2	+0.2 0.5C -0.1 LT
	85以上	冷間 (ST-SS)	+1 + 5 -0 - 0	+0.5 -0.5	20		+0.5 -0		+0.2 0.5C -0.1 LT
	100マデ	冷間 (ST-SS)	+1 + 5 -0 - 0	+0.5 -0.5	20		+0.5 -0		+0.2 0.5C -0.1 LT
	105以上	冷間 (ST-SS)	+1 + 5 -0 - 0	+0.5 -0.5	20		+0.5 -0		+0.2 0.5C -0.1 LT
	150マデ	熱間 (ST-SS)	+3 + 1 -0 - 0	+0.5 -0.2	20		+0.5 -0.2		+0.2 0.5C -0.1 LT
	160以上	熱間 (ST-SS)	+3 + 2 -0 - 0	+0.5 -0.2	20		+0.5 -0.2		+0.2 0.5C -0.1 LT
M10	80マデ	冷間 (ST-SS)	+1 + 3 -0 - 0	+0.5 -0.5	25	12.335軸造	+0.2 -0		+0.2 0.5C -0.1 LT
	85以上	冷間 (ST-SS)	+1 + 5 -0 - 0	+0.5 -0.5	25	12.755-ST	+0.4 -0	13	+0.3 1.0C -0.1 LT SS = 荒先・丸先 ST = 丸先
	100マデ	冷間 (ST-SS)	+1 + 5 -0 - 0	+0.5 -0.5	25	切削	-0		+0.3 1.0C -0.1 LT
	105以上	冷間 (ST-SS)	+1 + 5 -0 - 0	+0.5 -0.5	25		-0		+0.3 1.0C -0.1 LT
	130マデ	冷間 (ST-SS)	+1 + 5 -0 - 0	+0.5 -0.5	25		-0		+0.3 1.0C -0.1 LT
	150マデ	熱間 (ST-SS)	+3 + 2 -0 - 0	+0.5 -0.2	25		-0		+0.3 1.0C -0.1 LT
M12	80マデ	冷間 (ST-SS)	+1 + 3 -0 - 0	+0.5 -0.5	32	16	+0.2 -0.2	16.5	+0.3 1.0C -0.1 LT
	85以上	冷間 (ST-SS)	+1 + 5 -0 - 0	+0.5 -0.5	32		+0.2 -0.2		+0.3 1.0C -0.1 LT
	100マデ	冷間 (ST-SS)	+1 + 5 -0 - 0	+0.5 -0.5	32		+0.2 -0.2		+0.3 1.0C -0.1 LT
	105以上	冷間 (ST-SS)	+1 + 5 -0 - 0	+0.5 -0.5	32		+0.2 -0.2		+0.3 1.0C -0.1 LT
	130マデ	冷間 (ST-SS)	+1 + 5 -0 - 0	+0.5 -0.5	32		+0.2 -0.2		+0.3 1.0C -0.1 LT
	150マデ	熱間 (ST-SS)	+3 + 2 -0 - 0	+0.5 -0.2	32		+0.2 -0.2		+0.3 1.0C -0.1 LT
M14	全て	熱間 (ST-SS)	+2 + 2 -0 - 0	+0.5 -0.2	32	14	+0.4 -0	14.5	+0.3 1.0C -0.1 LT
	60マデ	冷間 (ST-SS)	+1 + 2 -0 - 0	+0.5 -0.2	32		+0.4 -0		+0.3 1.0C -0.1 LT
	65以上	冷間 (ST-SS)	+1 + 5 -0 - 0	+0.5 -0.5	32		+0.4 -0		+0.3 1.0C -0.1 LT
	120マデ	冷間 (ST-SS)	+1 + 5 -0 - 0	+0.5 -0.5	32		+0.4 -0		+0.3 1.0C -0.1 LT
	125以上	冷間 (ST-SS)	+1 + 2 -0 - 0	+0.5 -0.2	32		+0.4 -0		+0.3 1.0C -0.1 LT
	150マデ	熱間 (ST-SS)	+3 + 2 -0 - 0	+0.5 -0.2	32		+0.4 -0		+0.3 1.0C -0.1 LT
M16	60マデ	熱間 (ST-SS)	+2 + 2 -0 - 0	+0.5 -0.2	32	16	+0.2 -0.2	16.5	+0.3 1.0C -0.1 LT
	65以上	熱間 (ST-SS)	+3 + 5 -0 - 0	+0.5 -0.5	32		+0.2 -0.2		+0.3 1.0C -0.1 LT
	120マデ	熱間 (ST-SS)	+3 + 5 -0 - 0	+0.5 -0.5	32		+0.2 -0.2		+0.3 1.0C -0.1 LT
	125以上	熱間 (ST-SS)	+3 + 2 -0 - 0	+0.5 -0.2	32		+0.2 -0.2		+0.3 1.0C -0.1 LT
	150マデ	熱間 (ST-SS)	+3 + 2 -0 - 0	+0.5 -0.2	32		+0.2 -0.2		+0.3 1.0C -0.1 LT
	160以上	熱間 (ST-SS)	+3 + 2 -0 - 0	+0.5 -0.2	32		+0.2 -0.2		+0.3 1.0C -0.1 LT
M18	全て	熱間 (ST-SS)	+2 + 2 -0 - 0	+0.5 -0.2	38	18	+0.5 -0	18.5	+0.3 1.0C -0.2 LT
	熱間 (ST-SS)	+3 + 3 -0 - 0	+0.5 -0.2	40	20	+0.5 -0.2	20.5	+0.3 2.0C -0.2 LT	
M20	全て	熱間 (ST-SS)	+3 + 3 -0 - 0	+0.5 -0.2	40	22	+0.5 -0.2	22	+0.3 2.0C -0.2 LT
	熱間 (ST-SS)	+3 + 3 -0 - 0	+0.5 -0.2	42	22	+0.5 -0.2	23	+0.3 2.0C -0.2 LT	
M22	全て	熱間 (ST-SS)	+3 + 3 -0 - 0	+0.5 -0.2	42	24	+0.5 -0.2	24	+0.3 2.0C -0.2 LT
	熱間 (ST-SS)	+3 + 3 -0 - 0	+0.5 -0.2	48	24	+0.5 -0.2	25	+0.3 3.0C -0.2 LT	
M24	全て	熱間 (ST-SS)	+3 + 3 -0 - 0	+0.5 -0.2	60	24	+0.5 -0.2	25	+0.3 3.0C -0.2 LT
	熱間 (ST-SS)	+3 + 4 -0 - 0	+0.5 -0.2	60	30	+0.5 -0.2	31	+0.5 3.0C -0.2 LT	
M30	全て	熱間 (ST-SS)	+3 + 4 -0 - 0	+0.5 -0.2	72	36	+1 -0.5	36	+0.5 3.0C -0.2 LT
	熱間 (ST-SS)	+3 + 4 -0 - 0	+0.5 -0.2	72	36	+1 -0.5	36	+0.5 3.0C -0.2 LT	
M36	全て	熱間 (ST-SS)	+3 + 4 -0 - 0	+0.5 -0.2	72	36	+1 -0.5	36	+0.5 3.0C -0.2 LT

※一部インチ山もあります。