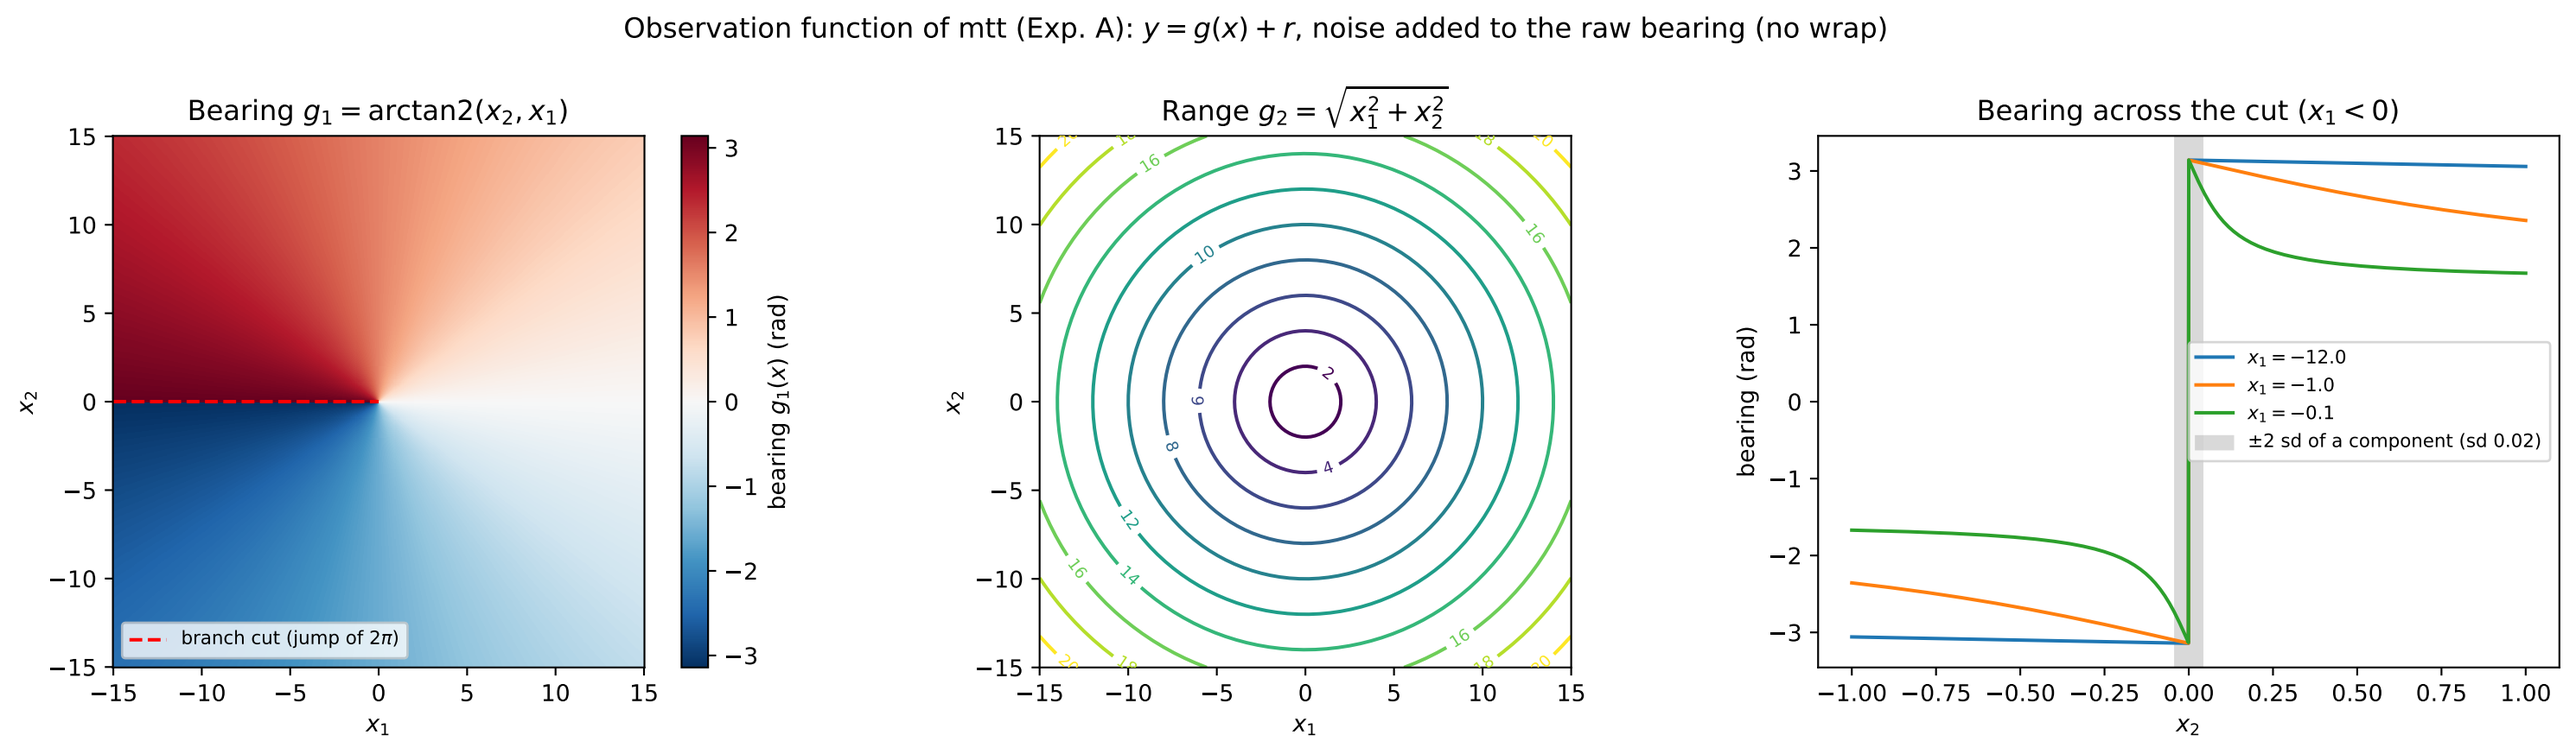

Observation function of mtt (Exp. A): $y = g(x) + r$, noise added to the raw bearing (no wrap)
Bearing $g_1 = \arctan2(x_2, x_1)$
branch cut (jump of 2π)
bearing $g_1(x)$ (rad)
x_1
x_2
Range $g_2 = \sqrt{x_1^2 + x_2^2}$
Bearing across the cut ($x_1 < 0$)
bearing (rad)
$x_1 = -12.0$
$x_1 = -1.0$
$x_1 = -0.1$
±2 sd of a component (sd 0.02)