

2 0 2 6
AUSA

ANNUAL MEETING & EXPOSITION
12-14 OCTOBER | WASHINGTON, DC

A PROFESSIONAL DEVELOPMENT FORUM



AUSA 2026
WASHINGTON, D.C.

KOREAN DEFENSE COMPANY BROCHURE

INNOVATIVE TECHNOLOGIES
FOR A SAFER TOMORROW

- 01 Global Systems
- 02 Nes & Tec
- 03 The Peach
- 04 DUTA Technology
- 05 V&C Tech
- 06 ASSETTA
- 07 PABLO AIR
- 08 Korea Information System
- 09 Hancom AwesomeTech
- 10 NARMA



AUSA

ASSOCIATION OF THE
UNITED STATES ARMY



GLOBAL SYSTEMS

TORUSS-ADS3000T

Integrated Counter-UAS System

Radar + EO/IR + AI Tracking + Jammer



Radar + EO/IR Detection
Radar, EO & Thermal Sensors



Real-Time AI Detection & Tracking
On-device AI



Soft Kill (Jamming)
RF Jamming



Proven Reliability
MIL-STD-810G / 461G · IP66



TORUSS-LR1000

Long-Range Observation System

EO/IR + LRF



EO/IR Day & Night Surveillance



66x Optical Zoom



Laser Range Finder up to 20 km
Measurement Range: 25 m – 20 km



AI Target Detection & Tracking

TORUSS-MR100EOD

Multimodal Surveillance System

EO/IR + IR Laser Illuminator



Full HD Day/Night Camera
1920 × 1080, 21x Optical Zoom



640 × 512 Thermal Camera



IR Laser Illuminator up to 800 m
940 nm / 5 W



360° Continuous Pan
Pan: 360° / Tilt: -60° to +60°



GLOBAL SYSTEMS



265 Techno 2-ro, Yuseong-gu, Daejeon, Republic of Korea



042-825-9190



042-825-9187



tax@globalsystem.co.kr



www.globalsystem.co.kr/en



SWID3

Surveillance & Reconnaissance UAV

EO/IR UAV for surveillance,
reconnaissance and target detection



EO/IR Day & Night Camera

EO 30× Zoom
(optical 10×, digital 3×)
IR 20× Digital Zoom

Up to 5 km
Control Range
(with LOS)

30 minutes
Flight Time

KCMVP Certified Encrypted Communication

Drone system login account
management

Key Applications

Surveillance & Reconnaissance

Wide-area monitoring
and target detection

Perimeter Security

Critical facility and
infrastructure inspection

Disaster Monitoring & Search

Search for missing persons
and disaster response

Attack and Rescue Missions

Payload drop for attack
or rescue (customized)

TM-200

Tilting Multicopter

Mission UAV for precision strike
and target attack



Precision Strike

Aiming on the target
using control attitude

5 kg

Payload

5 km

Operating Range

25 minutes

Flight Time
(with Payload)

Equipped with Encryption Module

Secure operation

Key Applications

Precision Strike / Target Attack

Engagement of
designated targets

One-Man Operation

Rapid deployment
and easy operation

Various Configurations

TM-200R (Rifle) · TM-200L (M72 LAW)
TM-200B (Bomb)

Military Operations

Support for warfighting
experiments (ROK Army)





THE PEACH INC.

Paper-Based Target Drones for Counter-UAV Training

01



eco-friendly packaging

PapyDrone-2700

C-UAV Target Training Drone

Paper-based fixed-wing target drone designed for realistic and cost-effective counter-UAV training.

Wingspan : 2700mm

Reflective Attachment
For C-UAV Radar Detection & Live Fire Drill



Drone Kit

Modular design enables rapid assembly



Low-Cost, Low RCS,
Paper based Composite Structure

※ A Catapult Launcher is Optional

Flight Time
≥100 min

Maximum Flight Speed
110 km/h

Payload
3 kg

Operating Distance
100 km

Wind Speed Tolerance
15 m/s

Takeoff Method
Catapult

Airframe Type
Fixed Wing

MTOW
≥8 kg

Wingspan
2,700 mm

02

PapyDrone-800

C-UAV Target Training Drone

Compact paper-based fixed-wing target drone for versatile and repeatable C-UAV training.

Reflective Attachment
For C-UAV Radar Detection & Live Fire Drill



DRONE KIT

Mass-produced
• Low-cost
• Low-RCS
• Aero-grade cardboard



DESIGNED FOR VOLUME

Attributable-grade airframes for live-fire C-UAV target training, decoy mission

Wingspan
800 mm

MTOW
≥1.4 kg

Cruise Speed
60 km/h

Operating Distance
30 km

Flight Time
≥30 min

Payload
500 g

Maximum Flight Speed
110 km/h

Airframe Type
Fixed Wing

Takeoff Method
Hand-Launching

Wind Speed Tolerance
15 m/s

03

ThePeach FCC-P1

Military Flight Control Computer



Built-in KCMVP-certified security module
(Korea Cryptographic Module Validation Program)

Supports Multiple Communication Interfaces
(UART, CAN, PWM, I2C)

Low Power Consumption, Fast Response,
High Sensitivity (IMU Performance)

Compact and lightweight design
(103 × 80 × 26 mm / 280 g)



THE PEACH INC.

Daejeon, Republic of Korea

TEL 042-721-9297

E-mail peach@thepeach.kr

WEB http://thepeach.kr

01 ANTI-DRONE SOLUTION

LEOPARD

Portable Anti-Drone System

Handheld RF detection and jamming gun for counter-drone operations.



Detection Range

> 500 m

Jamming Range

> 1.5 km

Operating Frequency

S / C Band

Weight

< 5 kg

Continuous Radiation Time

> 1 hour

02 UAV DATA LINK SYSTEM

Reliable data link solution for unmanned moving objects.

C2 / Payload Data

C2 / payload data processing, video transmission



EAV-3



CTLS



OPPAV



KC-100



EAV-4

Cluster Operation

UAV swarm data link

GPS-based Automatic Tracking

Supports unmanned moving objects



03 ANTENNA SYSTEM

Antenna solutions for low-orbit and geostationary satellites.

UAV & Satellite Application

Antennas for low-orbit and geostationary satellites

Ground Antenna Systems

LEO CubeSats and Ka-band satellite tracking antennas





01

PRECISION BEARINGS

V&C Technologies, Ltd is developing and manufacturing precision bearings for aerospace since 2011.



Angular/Deep Ball Bearings



Roller Bearings

Materials

RACE	M50(AMS6491), AISI440C, STJ2
CAGE	4340(AMS6414), Phenolic, PTFE, PEEK
BALL/ROLLER	Si ₃ N ₄ , AISI440C, M50(AMS6491)
SURFACE TREATMENT	Cr electroplating, Silver Plating

Applications



- Air Crafts
- Furnace for Semiconductor

02

ROTOR COMPONENTS

Precision rotor parts for gas turbine of a small engine.

We're extending our capability to machining the rotor components of gas turbine of a small aircraft.

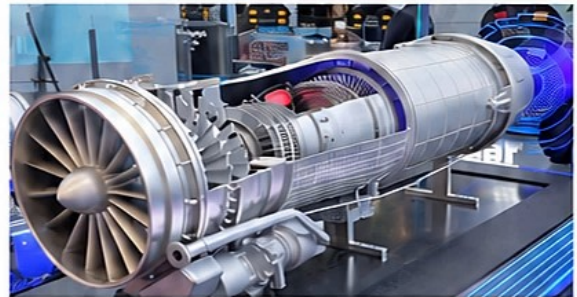

03

PRECISION PARTS

High-mix, low-volume (HMLV) precision parts for space launch vehicles and other aerospace applications.



QUALITY & CERTIFICATION

AS 9100

ISO 14001



ASSETTA is a South Korean unmanned aircraft systems company developing and manufacturing multicopter, FPV, fixed-wing and VTOL platforms for defense, public safety, training, surveillance and specialized missions.

01 | LARGO MILITARY SURVEILLANCE VTOL

Large-class unmanned vertical take-off and landing aircraft for long-endurance surveillance missions.



Size	1,800 mm X 3,200 mm (no Landing Gear)
Weight	20 kg
Payload	1 kg
Flight Distance	25 km
Flight Time	100 min
Communication	RF / LTE

02 | CARDBOARD DRONE FIXED-WING (DISPOSABLE)


Low-cost, low-observable fixed-wing drone developed with cardboard materials ('24 ~ '26).



Size	2,000 mm X 880 mm X 410 mm
Net Weight	2.7 kg (Fuselage 1.2 kg + Wing 1.5 kg)
Battery Weight	1 kg (8200 mAh)
Total Weight (1 battery)	3.7 kg (Flight Time 60 min with 1 battery)
Total Weight (2 batteries)	4.7 kg (Flight Time 120 min with 2 batteries)
Cruise Speed	60 km/h
Take-off · Landing	Hand-Launch, Fuselage-Landing (No Landing Gear)

03 | FIBER-OPTIC DRONE MULTI-PURPOSE TETHERED DRONE

Multi-purpose tethered drone immune to electronic attacks.

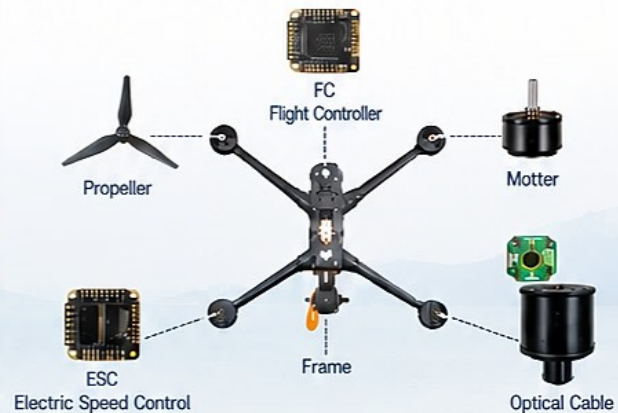

Cable Size	88 mm X 120 mm (0.28 mm)			
Flight Time (10 inch)	Payload 4 kg - 10 min			
	Payload 3 kg - 15 min			
Cable Weight by Length				
1 km	5 km	10 km	20 km	30 km
0.24 kg	0.75 kg	1.00 kg	2.00 kg	2.80 kg





Swarm Coordination

Networked autonomous operations



Swarm Control Platform

Integrated mission control



Precise / Mass Production System

In-house design and scalable manufacturing

01

PabloM S-Series

Swarm Loitering Munition Drone (Strike)



Swarm loitering munition attack



Self-powered launch



AI-based swarm flight and terminal guidance



S10s



S20s

02

PabloM R-Series

Swarm Reconnaissance Drone (Reconnaissance)



Wide-area surveillance and reconnaissance



Long-endurance flight



Mesh-based data links



R10s



R20s

03

PabloM C-Series

Swarm Interceptor Drone (Counter)



Counter-UAS (Air-to-Air)



High-speed interception with swarm intelligence



Self-powered launch



C05s



C10s



SEA-Mamba

Intelligent Maritime Reconnaissance Drone

Edge-Ai Autonomous Target Detection Platform

SEA-Mamba autonomously detects persons in distress and suspicious vessels, streaming coordinates and snapshots to the GCS.



KEY FEATURES



AI-POWERED DETECTION

Onboard AI autonomously detects persons in distress and suspicious vessels.



REAL-TIME REPORTING

Streams coordinates and snapshots to the GCS in real time.



MARITIME INTEGRATION

Open MAVLink architecture enables teaming with maritime unmanned systems (USV/UUV) and swarm operations.

KEY SPECIFICATIONS



40+ min
Flight Time



≥ 12 m/s
Wind Resistance



IPX3
Ingress Rating



Edge-AI
30 fps+
AI Detection



LTE / MAVLink
Communications



Detect →
Geolocate → Report
Autonomous Mission

APPLICATIONS



Maritime Surveillance



Search & Rescue

RADIS

Radio Frequency Scanner

Advanced Drone Detection RF Scanner

RADIS provides reliable drone detection with high angular resolution and automatic tracking.



KEY SPECIFICATIONS

Angular Resolution	0.05°
Tilt Range	-15 ~ 110°
Pan Range	360° (continuous)
Pan Speed	300°/s
Waterproof / Dustproof	IP43
Auto-Tracking Method	GPS Location, RF Signal Strength



HANCOM

AWESOME TECH

DRONE R&D AND MANUFACTURING
FOR A SMARTER, SAFER WORLD



**Fixed Wing /
Rotary Wing / VTOL Drones**
R&D · Manufacturing



Drone Mapping & GIS
2D/3D mapping (Orthomosaic)
Agricultural monitoring (NDVI)



AI & Swarm Control
Autonomous flight, swarm operation
and integrated mission control

01

VTOL Drone

Auto mission + Terrain tracking flight + LTE
+ Ultra-light long flight + Optical/Thermal camera



120 min
Flight Time



1.0 kg
Load Weight



2,100 × 1,200 × 160 mm
Size



10 m/s
Max Wind Resistance



optical, thermal
10x zoom
Optical Equipment

02

Fixed Wing Drone (Tech Blender F/W)

Auto mission + Terrain tracking flight + LTE
+ Ultra-light long flight + Optical camera + Swarm Flight



120 min
Flight Time



250 g
Load Weight



1,255 × 673 × 94 mm
Size



15 m/s
Max Wind Resistance



Optical
14MP / Sony 15.3MP
Optical Equipment

03

Fixed Wing Drone

Auto mission + Terrain tracking flight
+ LTE + Ultra-light long flight
+ Optical camera + Swarm Flight



120 min
Flight Time



160 g
Load Weight



1,150 × 580 × 120 mm
Size



Optical
14MP / Sony 15.3MP
Optical Equipment

04

Rotary Wing Drone

Auto mission + Optical, thermal imaging
32x zoom + a mid-distance flight



32 min
Flight Time



100 g
Load Weight



282 × 373 × 84 mm
Size



Optical, Thermal
32x zoom
Optical Equipment

05

Rotary Wing Drone

Auto mission + LTE + Ultra-light long flight



32 min
Flight Time



100 g
Load Weight



320 × 440 × 118 mm
Size



Optical
6x zoom, 1/2inch, 48MP
Optical Equipment



Daejeon, Republic of Korea
#A-404, 17 Techno 4-ro, Yuseong-gu,
Daejeon 34013, Republic of Korea

WEB

www.hancomat.com/en

TEL

+82-42-583-7266





PRODUCT LINE

One tilt-rotor core. Three aircraft.

01 AF100



Emergency public safety —
AED, patrol

FAA Passed / Green UAS in Progress



1.2 kg

Max Payload



35 m/s

Max Cruising Speed



45 km

Max Flight Distance

02 AF200



Small logistics & medical delivery

IP rate Certified



4.0 kg

Max Payload



30 m/s

Max Cruising Speed



50 km

Max Flight Distance

03 AF400



Defense & heavy cargo — ISR, transport

TTA Certified

* 2025.12 First Flight



20 kg

Max Payload



35 m/s

Max Cruising Speed



50 km

Max Flight Distance

CORE TECHNOLOGY

PXN

Flight Software

- Certifiable flight control software
- PX4 reinvented for DO-178C
- Automated verification & continuous validation




PX4 Reinvented for DO-178C



Edge AI

- Onboard Edge AI for real-time detection
- On-drone video processing
- Instant alert via LTE/VPN
- Supports autonomous decision-making

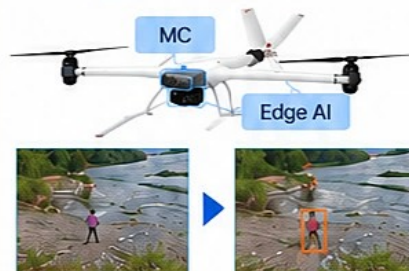

Swarming Flight

- AI-based swarming and formation flight
- Real-time path planning and collision avoidance
- Time synchronization (GPS)
- Enhanced mission efficiency and safety



Korea Aerospace Research Institute, Bldg. 15&16
169-84 Gwahak-ro, Yuseong-gu, Daejeon,
34133, Republic of Korea



www.narma.co.kr/en



kijung.kwon@narma.co.kr

