


2.1" HB RED
[LED display]

[80 X 7]

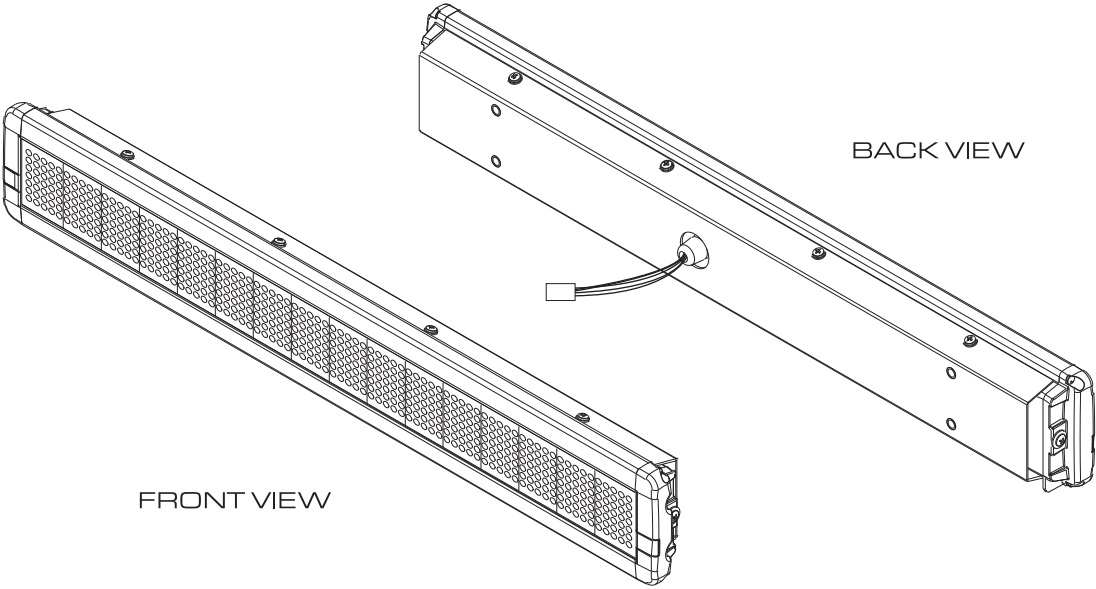

BASIC

Adaptive Part Number	11052111
Matrix	80 X 7
Dot Pitch	0.3 inch (7.62 mm)
Dot Size.....	0.2 inch (5.08mm)
Display Colors.....	High Brightness Red (Tricolor optional)
Weight	6 lbs.

DIMENSIONS

Case Dimensions	25.86" X 2.28 X 3.78" (L X W X H)
Display Area	24" X 2.1"
Character Size.....	2.1" (53.34mm)

FEATURES

Characters Per Line	13 typical
Memory Capacity	32K Ram Standard
Standard Interface	RS485
Compliant to Load Dump Requirements per SAE J1445 at 12 VDC	
Shock and Vibration Tested	
Splash and Dust Resistant	

ENVIRONMENTAL

Full Display Operating Temperature	0° to 50°C
Operational and Storage Temperature	-40° to 85°C
Humidity	0 to 95% non-condensing
Cold/Hot Start Temperatures	-40°C to 85°C

POWER

Input Voltage				Range w/load dump protection 9 to 26VDC (12VDC Typical)
Power				36W Average
Connector Cap				AMP Mate-N-Lok P/N 350781-1 (or equivalent)
Cap pin #	Amp Contact (or equivalent)	Wire color/AWG	Description/Use	
1	350218-7 or 35054-7	Black/16	Power ground	
2	No connect	No connect	None	
3	350218-7 or 35054-7	Black/20	J1708A differential (RS485)	
4	350218-7 or 35054-7	Red/16	+12VDC unswitched	
5	350218-7 or 35054-7	Orange/16	+12VDC switched	
6	350218-7 or 35054-7	White/20	J1708B differential (RS485)	

