




	1	2	3	4	5	
A	Globals File: globals.kicad_sch	ACIA/UART File: uart.kicad_sch				A
B	CPU File: cpu.kicad_sch Address Decoder File: decoder.kicad_sch Memory File: mem.kicad_sch	Keyboard File: keyboard.kicad_sch LCD File: lcd.kicad_sch VIA File: via.kicad_sch				B
C						C
D						D
	1	2	3	4	5	

Sheet: / File: bv6502_hw.kicad_sch		
Title:		
Size: USLetter	Date:	Rev:
KiCad E.D.A. 10.0.3		Id: 1/9

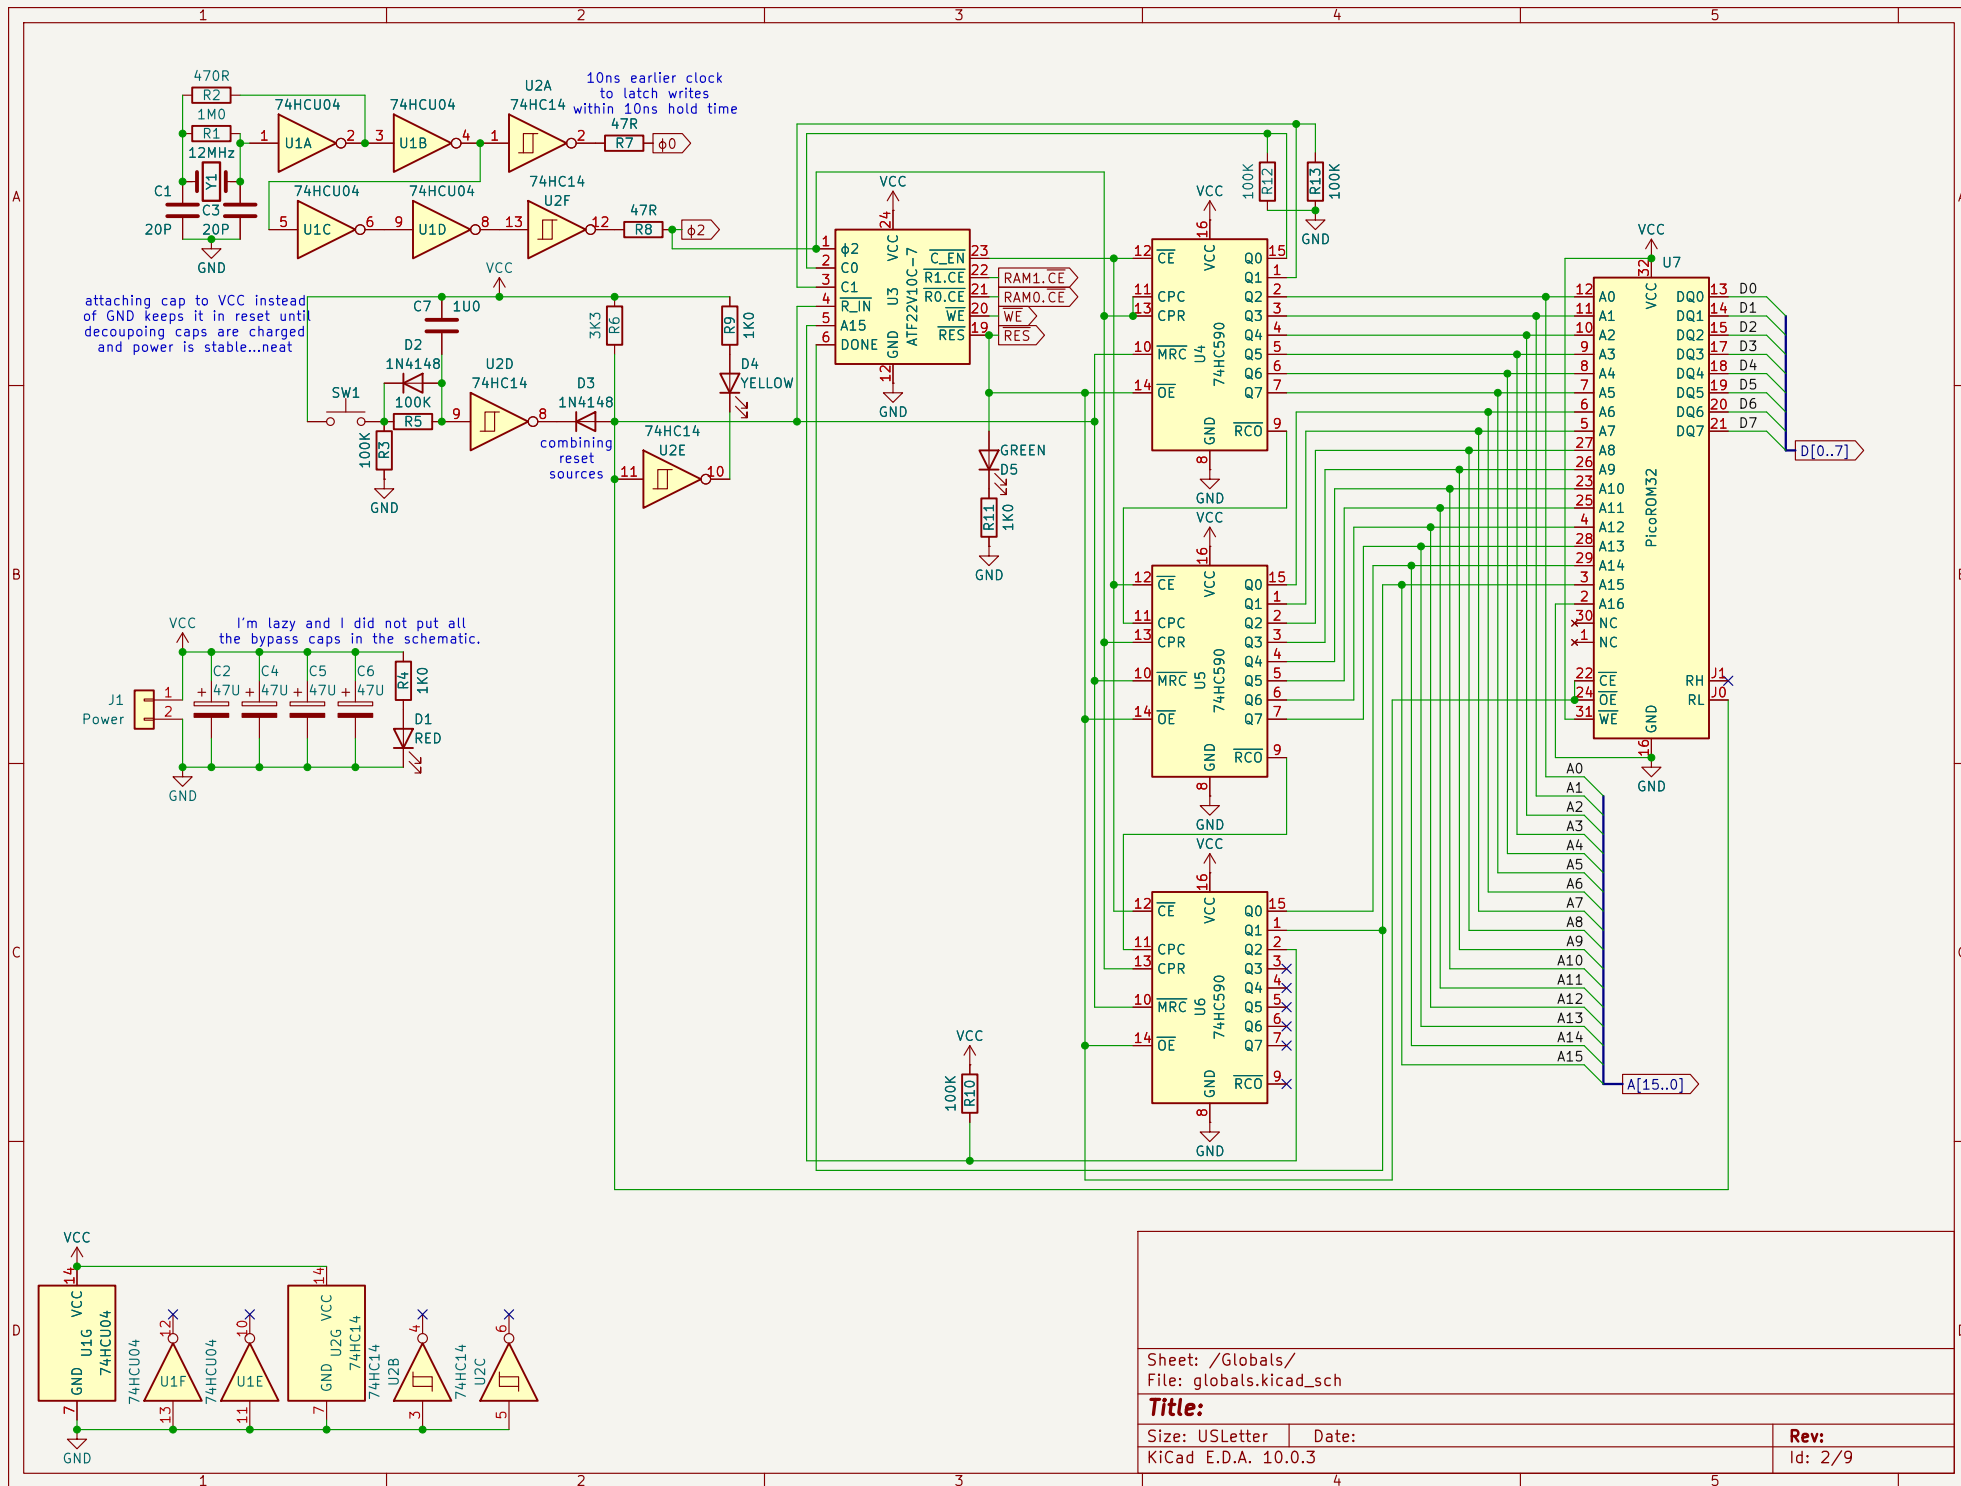

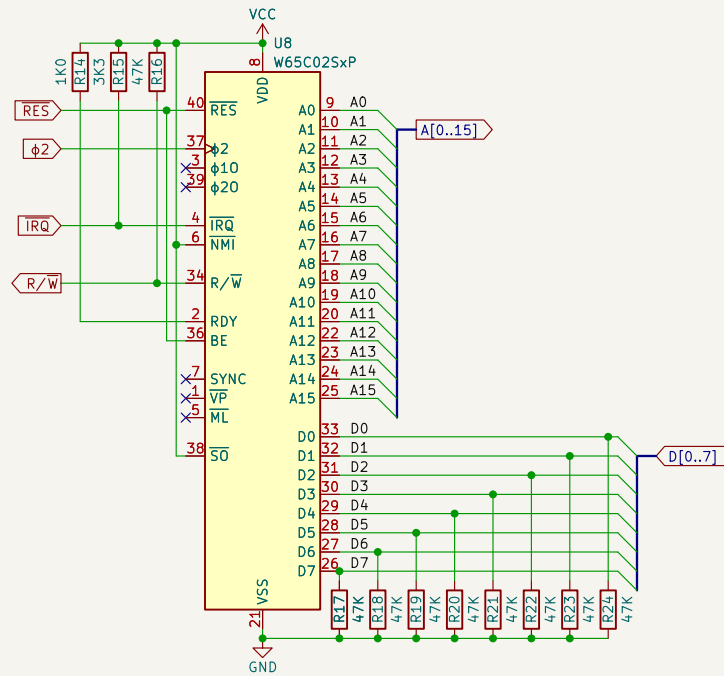

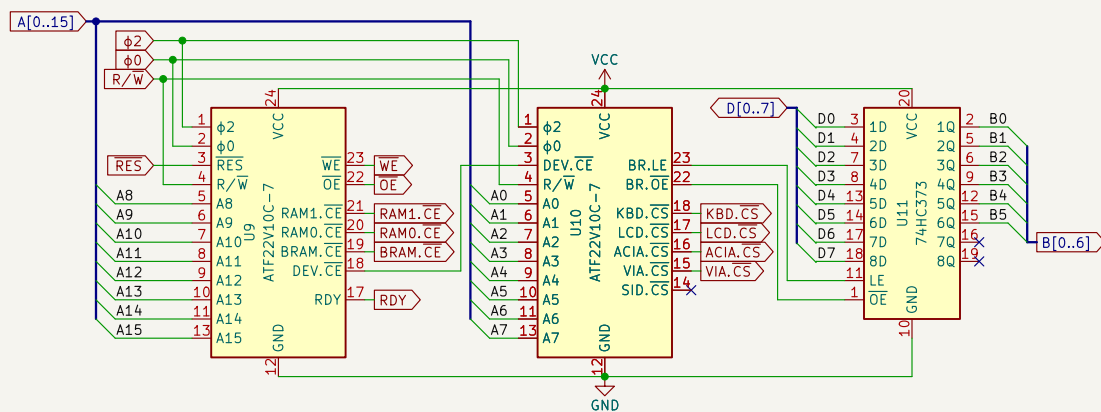


Sheet: /Address Decoder/
File: decoder.kicad_sch

Title:

Size: USLetter Date:
KiCad E.D.A. 10.0.3

Rev:
Id: 4/9

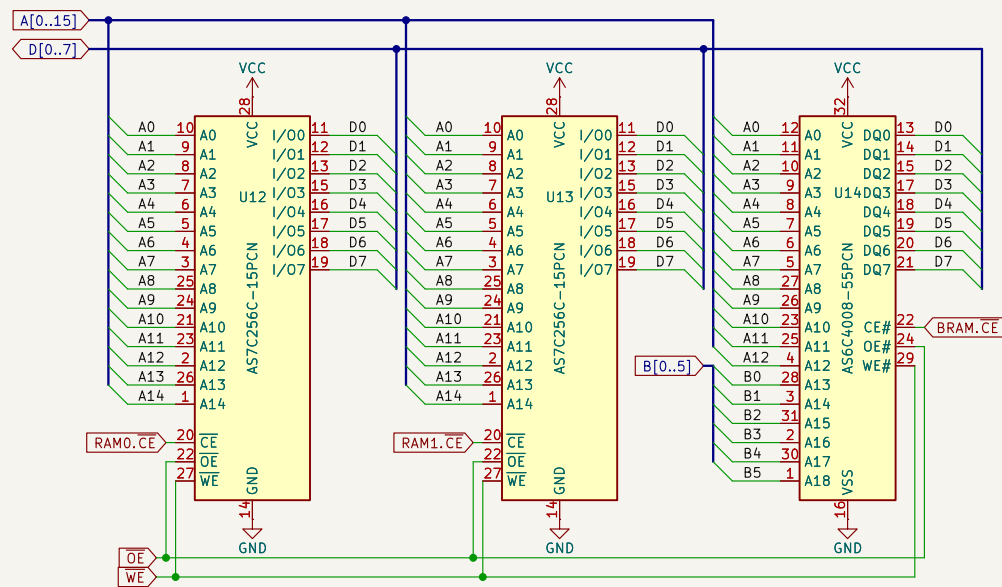


Sheet: /Memory/
File: mem.kicad_sch

Title:

Size: USLetter Date:
KiCad E.D.A. 10.0.3

Rev:
Id: 5/9

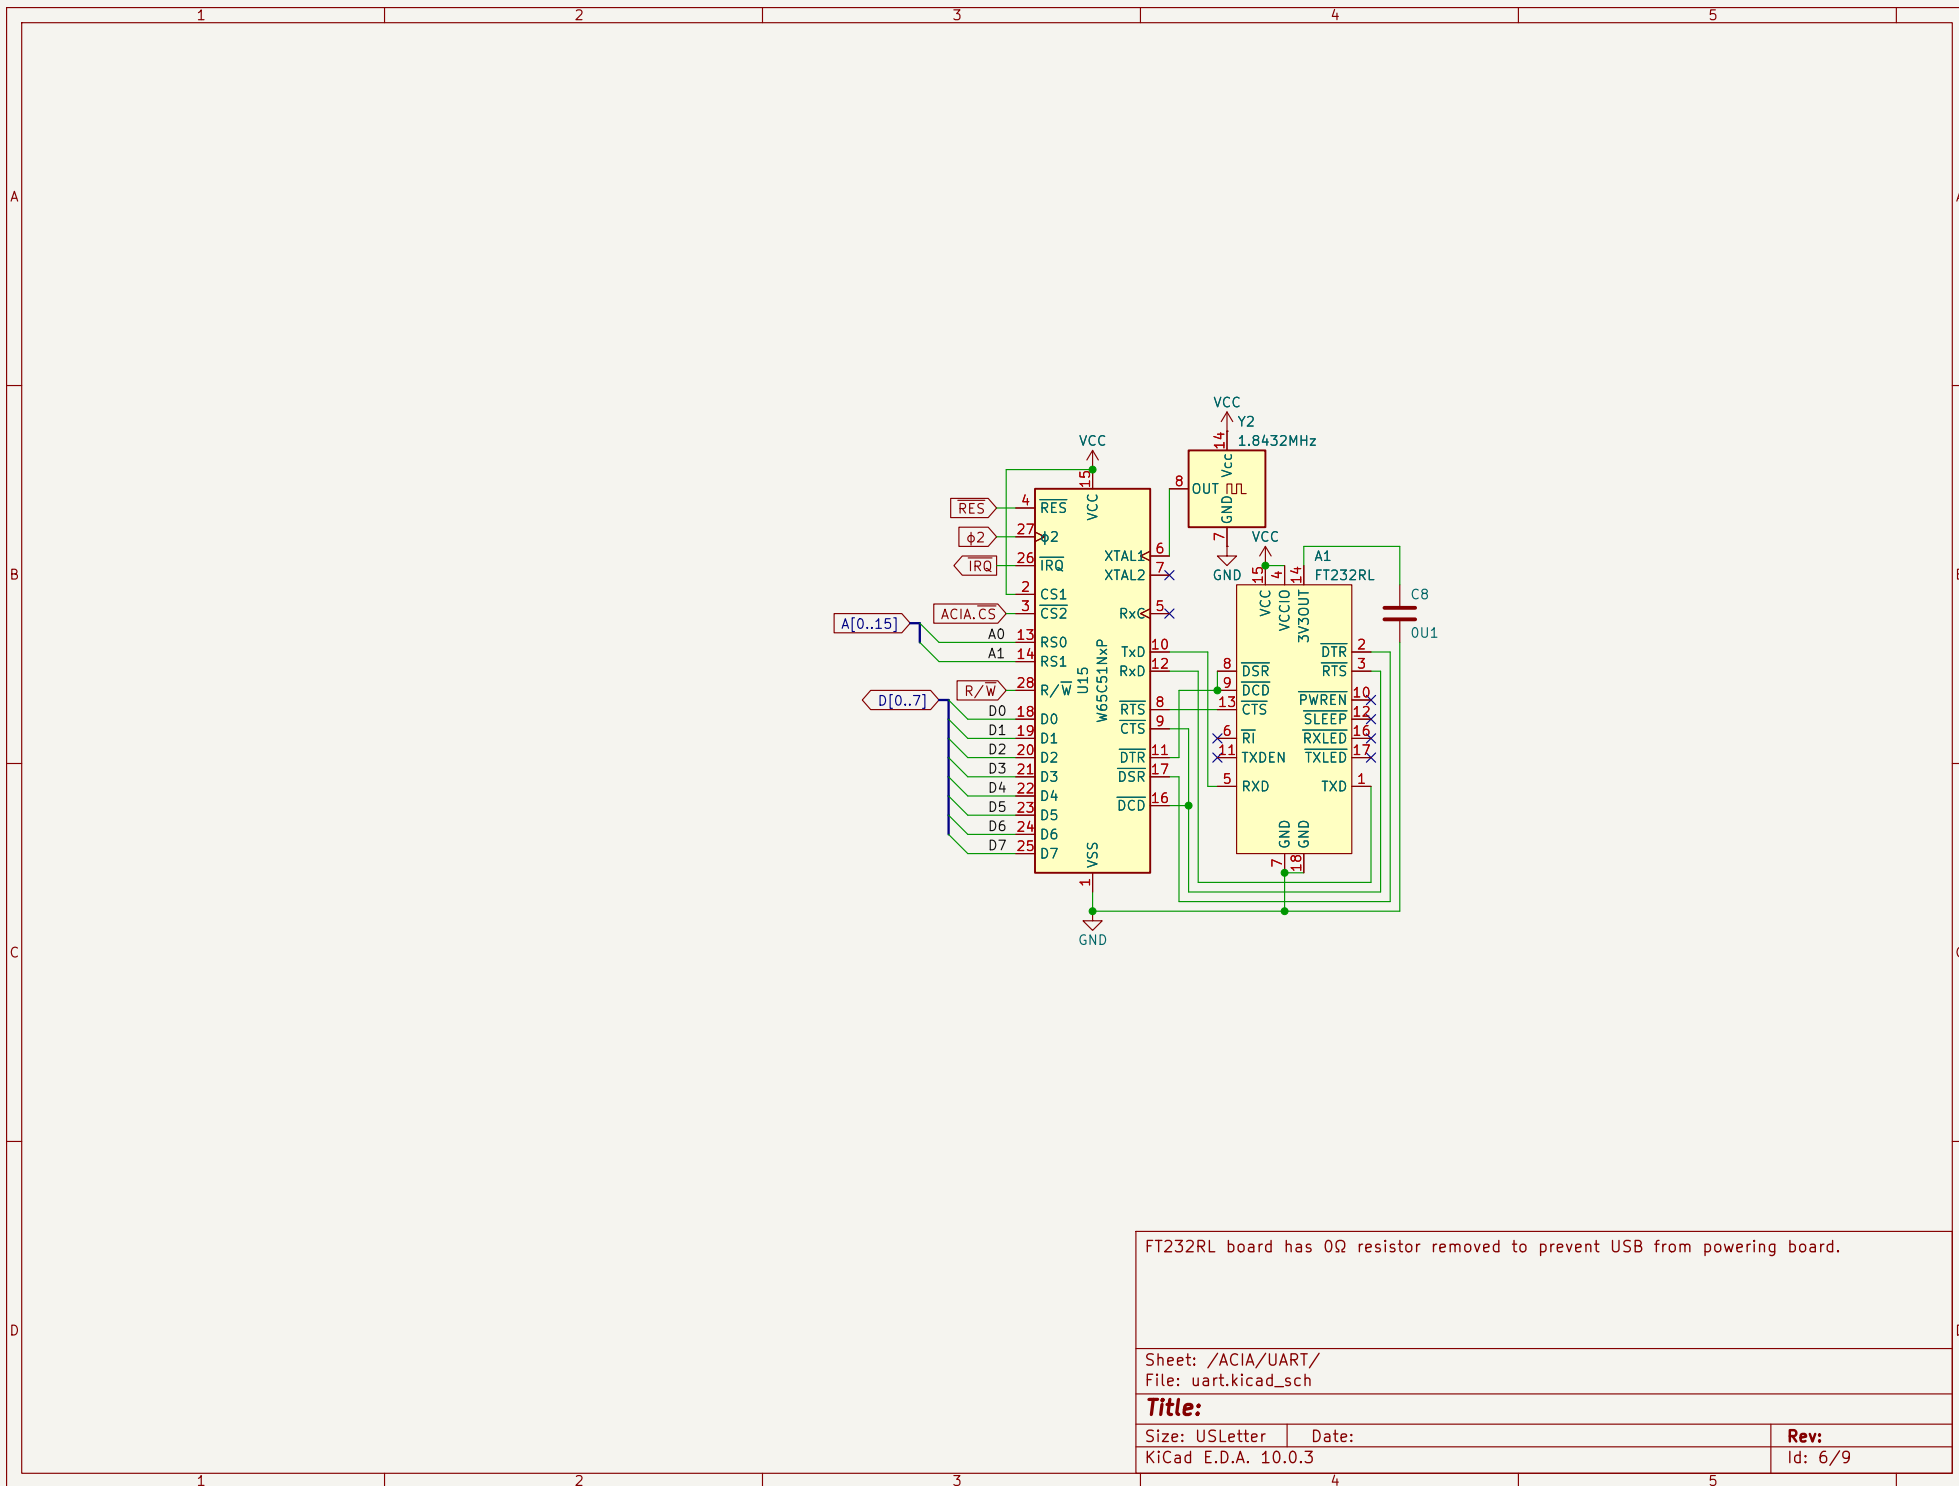

FT232RL board has 0Ω resistor removed to prevent USB from powering board.

Sheet: /ACIA/UART/
File: uart.kicad_sch



Title:

Size: USLetter
KiCad E.D.A. 10.0.3

Date:

Rev:

Id: 6/9

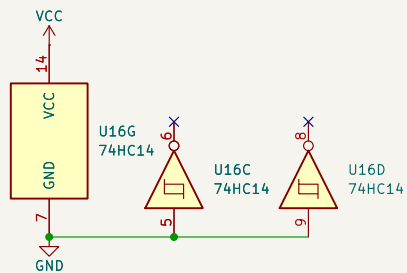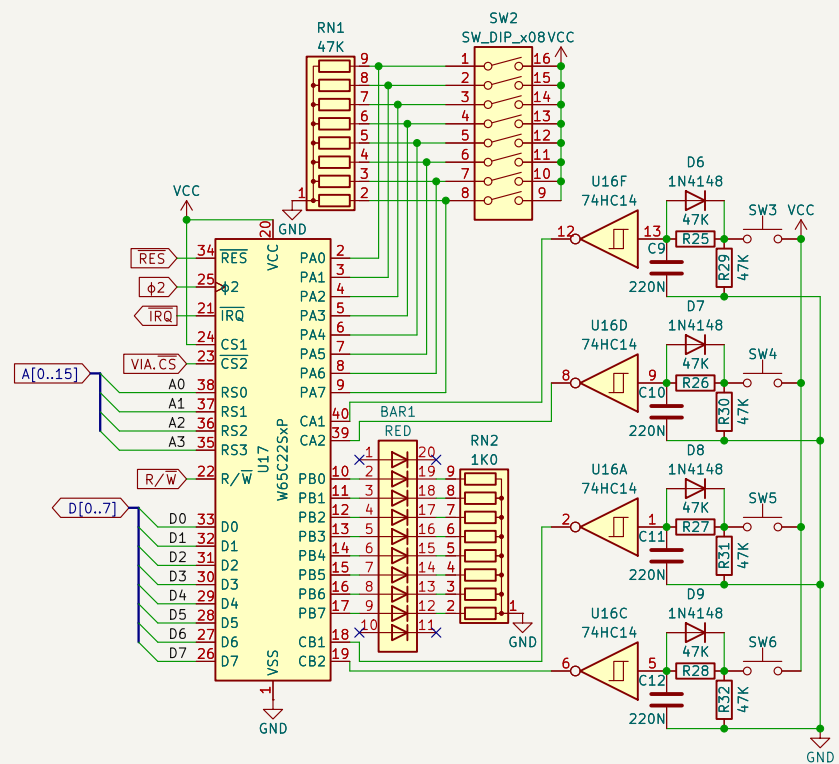


Sheet: /VIA/
File: via.kicad_sch

Title:

Size: USLetter Date:
KiCad E.D.A. 10.0.3

Rev:
Id: 7/9

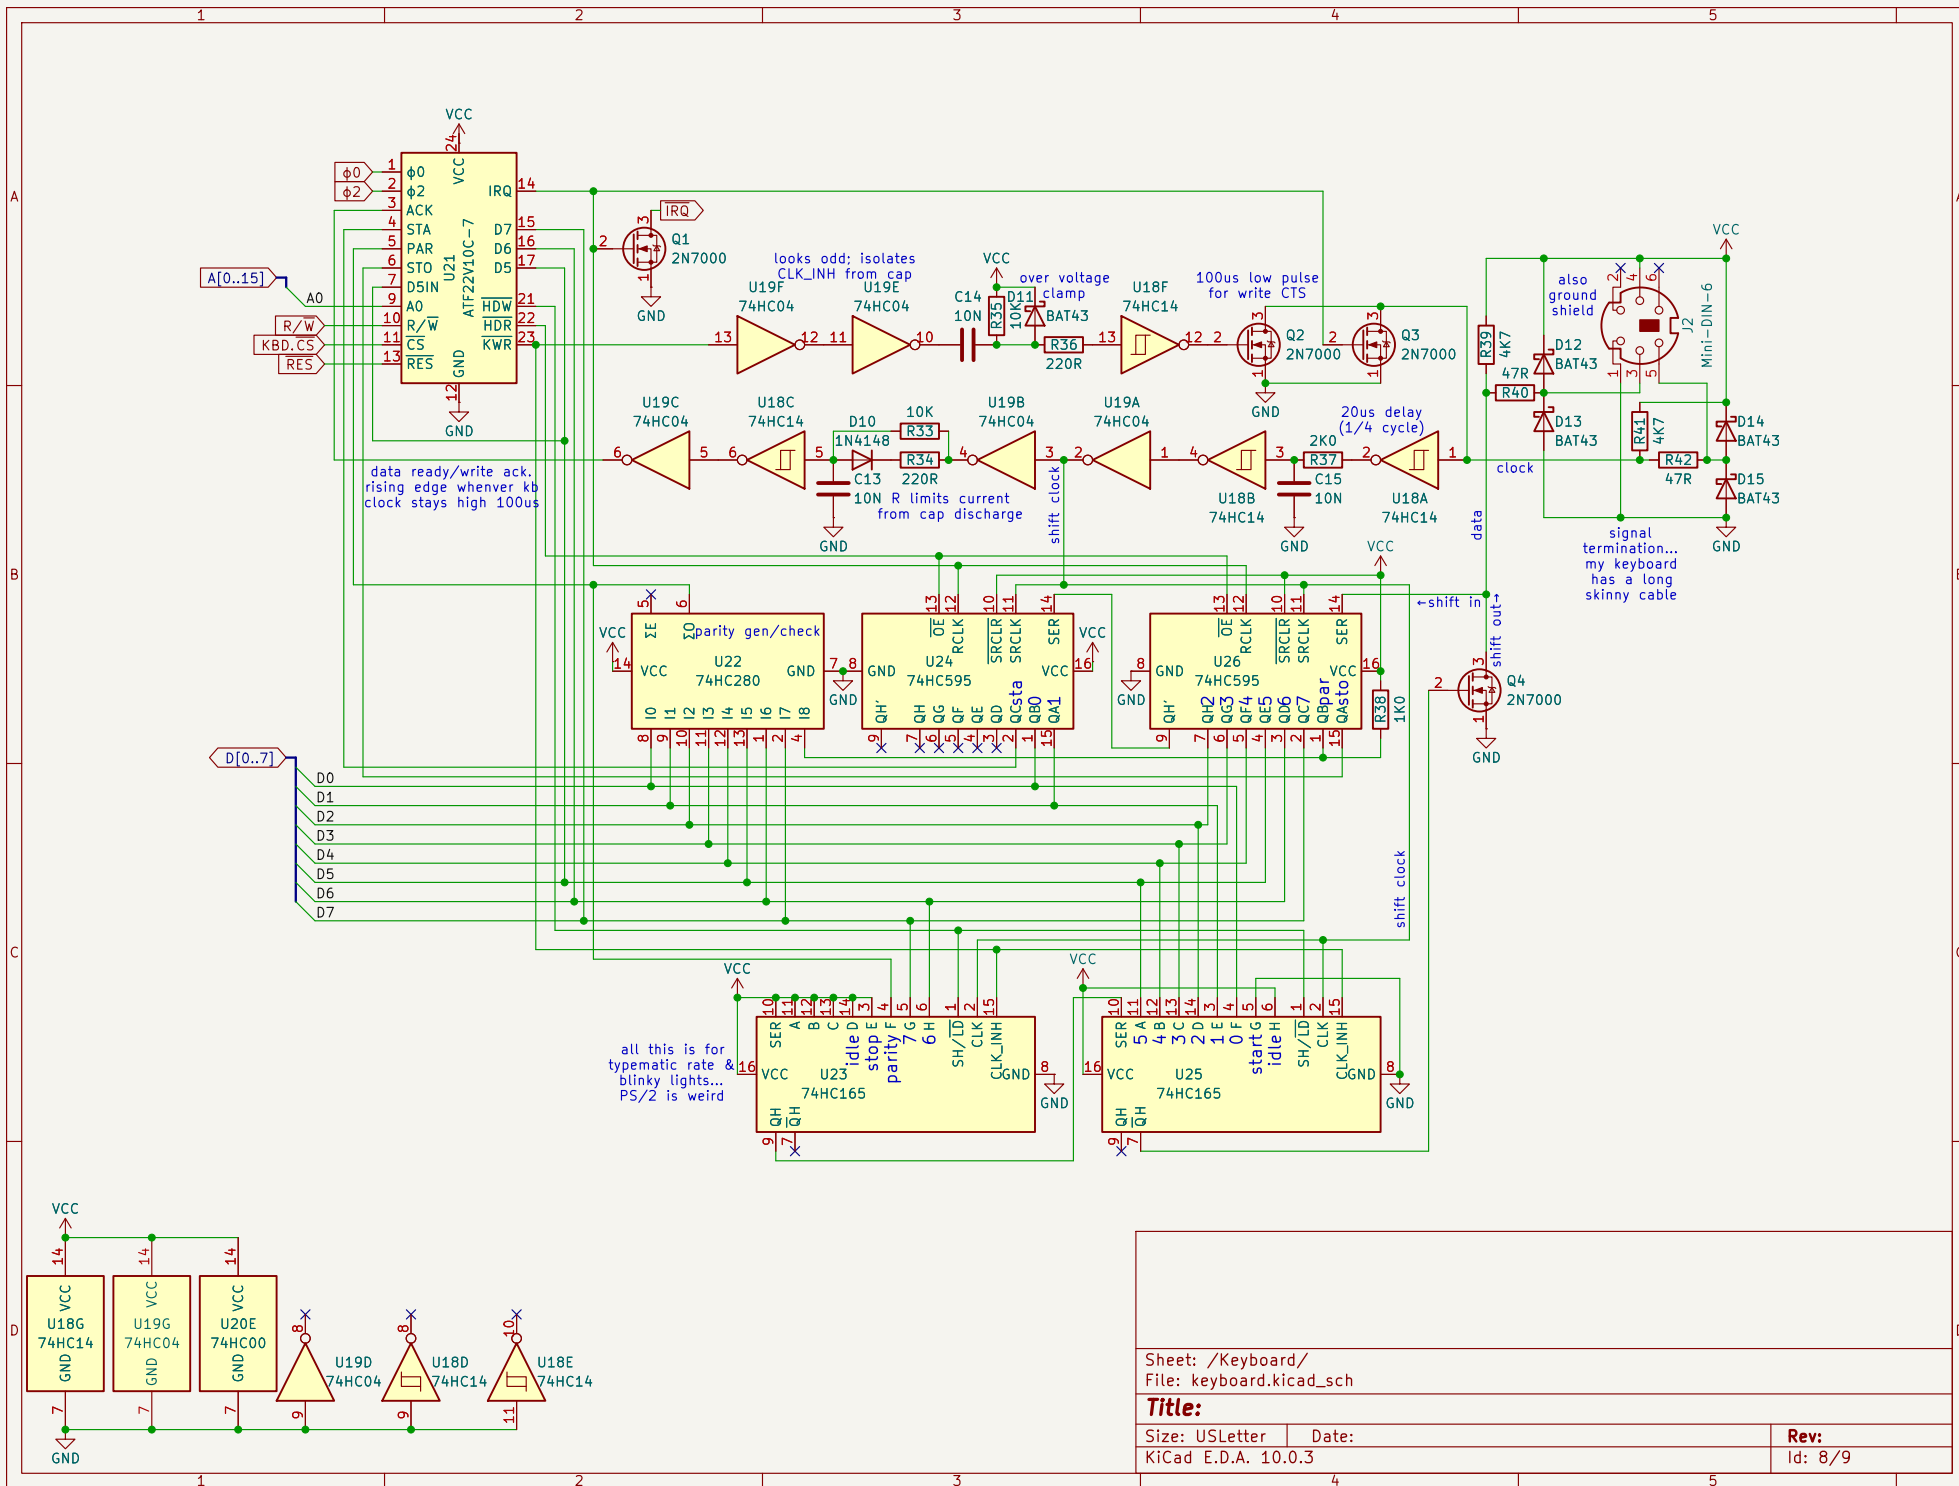


Sheet: /Keyboard/
File: keyboard.kicad_sch

Title:

Size: USLetter Date:
KiCad E.D.A. 10.0.3

Rev:
Id: 8/9

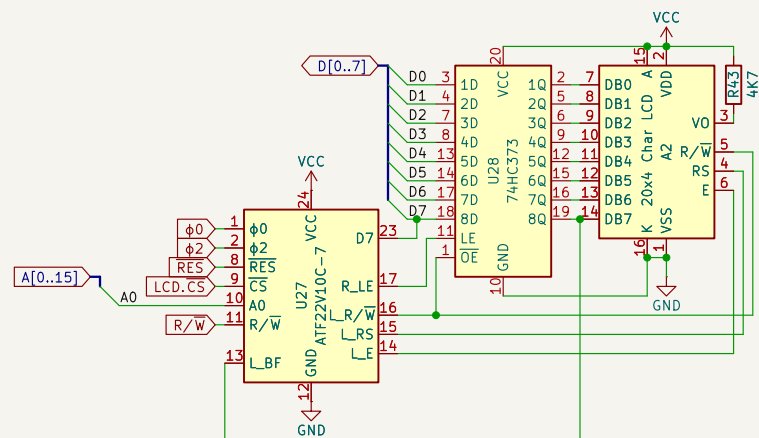

Sheet: /LCD/
File: lcd.kicad_sch

Title:

Size: USLetter Date:
KiCad E.D.A. 10.0.3

Rev:
Id: 9/9