MFC SEALING TECHNOLOGY CO.,LTD.

**Head Office**
**MFC SEALING TECHNOLOGY CO., LTD.**
Address: No. 41, Wu-Chuan-Wu Road
Wu-Ku Industrial Park
Taipei Hsien, 248
Taiwan, R.O.C.
TEL: +886-2-2298-8556
+886-2-2298-8670 (English)
+886-2-2298-8491 (English)
FAX: +886-2-2299-2189 +886-2-2298-3923
+886-2-2298-3850
E-mail: mfc@mfc.com.tw

**SHANGHAI MAIHWA OIL SEAL IND. CO., LTD.**
Address: No. 111, Yunhe Road
Shuyuan-Cun Jianghai Town, Feng-Xian District
Shanghai City, 201400
P. R. CHINA
TEL: +86-215-741-4094 +86-215-741-4095
+86-215-718-6594 +86-215-742-2808
FAX: +86-215-741-0038

**HAIFUNG RUBBER PRODUCTS IND. CO., LTD.**
Address: No.9, Feixi East Road
Feixi Industry Park, Pingshan Town, Longgang District
Shenzhen City, 518118
P. R. CHINA
TEL: +86-755-2882-8056 +86-755-8420-3428
+86-755-8460-6332
FAX: +86-755-8460-0359

website: www.mfc.com.tw

MFC NO: 997XX0111 Version:1.2 2010.03

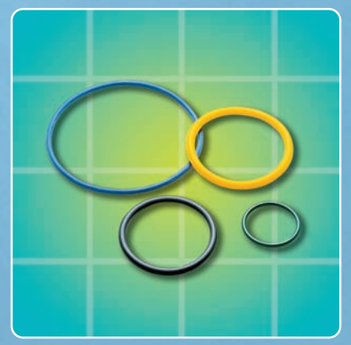

Your Inspiration to Sealing Solutions

*ISO / TS16949*

# Quality Policy

Continuous innovation through synergy among entire MFC staff to enhance efficiency and exceed customers' requirements

# Quality Commitment

Refuse to: Produce defects,
Accept defects,
Ship defects

**100% Quality Assurance**

# CONTENTS


| | |
|---|---|
| ■ MATERIAL SELECTION GUIDE | 2-3 |
| ■ INSPECTION STANDARD | 4 |
| ■ TYPICAL O-RING DEFECTS | 5 |
| ■ STANDARD TOLERANCE | 6-7 |
| ■ AS568 STANDARD O-RING S07A AND X-RING S22A SIZE LIST | 8-10 |
| ■ EUROPEAN METRIC STANDARD SERIES SIZE LIST | 11-14 |
| ■ JAPANESE STANDARD | 15-17 |
| ● P. SERIES | 15 |
| ● V. S. SERIES | 16 |
| ● G. SERIES | 17 |
| ■ O-RING KIT | 18-19 |
| ■ AS568 STANDARD BACK UP RING | 20 |

# MATERIAL SELECTION GUIDE

| MFC Material No. / Information | NATURAL RUBBER | SBR | BUTYL | HNBR | EP | BUNA-N |
|---|---|---|---|---|---|---|
| Common Name<br>ASTM D-2000 Classification<br>Military (Mil-Std417)<br>Chemical Definition | Natural Rubber<br>AA<br>RN<br>Polyisoprene | SBR,GRS<br>AA,BA<br>RS<br>Styrene Butadiene | Butyl<br>AA,BA<br>RS<br>Isobutylene Isoprene | HNBR<br><br><br>Hydrogenated Acrylonitrile Butadiene | EPR,EPT,EPDM<br>CA<br>RS<br>Ethylene Propylene | Buna N, Nitrile, NBR<br>BF, BG, BK<br>SB<br>Butadiene Acrylonitrile |
| General Characterisitcs<br><br>Durometer-Range (Shore A)<br>Tensile Range (P.S.I.)<br>Elongation (Max.%)<br>Compression Set<br>Resilience-Rebound<br>Abrasion Resistance<br>Tear Resistance<br>Solvent Resistance<br>Oil Resistance<br>Low Temperature Usage (°F)<br>High Temperature Usage (°F)<br><br>Aging Weather-Sunlight<br>Adhesion To Metals<br>Usual Hardness Range | <br><br>20-90<br>500-3500<br>700<br>Excellent<br>Excellent<br>Excellent<br>Excellent<br>Poor<br>Poor<br>-20° to -60°<br>to 175°<br><br>Poor<br>Excellent<br>35-80 Shore A | <br><br>30-90<br>500-3000<br>600<br>Good<br>Good<br>Excellent<br>Fair<br>Poor<br>Poor<br>0° to -50°<br>to 225°<br><br>Poor<br>Excellent | <br><br>40-90<br>500-3000<br>850<br>Fair to Good<br>Fair<br>Fair<br>Good<br>Poor<br>Poor<br>-10° to -60°<br>to 250°<br><br>Excellent<br>Good | <br><br><br>2600<br>530<br>Excellent<br>Excellent<br>Excellent<br>Excellent<br>Good<br>Excellent<br>-65° to 250°<br>to 350°<br><br>Excellent<br>Good<br>60-80 Shore A | <br><br>30-90<br>500-2500<br>600<br>Good<br>Good<br>Good<br>Fair<br>Poor<br>Poor<br>-20° to -60°<br>to 350°<br><br>Excellent<br>Fair to Good<br>50-90 Shore A | <br><br>20-95<br>200-3000<br>600<br>Good<br>Good<br>Excellent<br>Good<br>Good to Excellent<br>Good to Excellent<br>+30° to -40°<br>to 250°<br><br>Poor<br>Good to Excellent<br>50-90 Shore A |
| FEATURES | Advantage:<br>· High resilience<br>· Good compression set<br>· Food roll building behavior and molding properties<br>· Good friction surface, but not a fine smooth surface when ground<br>· High tear strength<br>· Low crack growth<br>· Good low temperature<br>· Usable for ketones and alcohol<br>· Good low temperature properties<br><br>Disadvantage:<br>· Not recommended for oil and solvent resistance and ozone attacks it | Advantage:<br>· Low cost non-oil resistance material<br>· Good water resistance and resilience up to 70 durometer<br>· Poorer compression set with higher durometer<br>· Satisfactory for most moderate chemical and wet or dry organic acids<br><br>Disadvantage:<br>· Not recommended for ozone, strong acids, oils, greases, fats and most hydrocarbons | Advantage:<br>· Impermeable to most common gasses<br>· Good resistance to sunlight and ozone<br>· Normally satisfactory when exposed to animal and vegetable oils and oxidizing chemicals<br><br>Disadvantage:<br>· Not recommended for use with petroleum solvent, coal tar and aromatic hydrocarbons | Advantage:<br>· Exhibit better wear resistance than standard nitrile.<br>· Excellent abrasion, compression set, tensiles, and tear properties.<br>· Good resistance to ozone, sunlight, and other atmospheric conditions.<br>· Vastly improved resistance to heat aging up to 300°F range and, for short periods, in the 350°F range available material exhibits a low temperature range -40°F.<br>· Generally used in laundry and dishwashing detergents.<br><br>Disadvantage:<br>· Not recommemded for exposure to ketone, esters, aromatic fluids. | Advantage:<br>· Exceptionally good weather aging and ozone resistance<br>· Excellent water and chemical resistance<br>· Excellent resistance to gas permeability and aging due to exposure to steam<br>· Excellent resistance up to 350°F<br>· Good in ketones and Alcohols<br><br>Disadvantage:<br>· Not commended for food applications or exposure to aromatic hydrocarbons | Advantage:<br>• Has good solvent, oil, water and hydraulic fluid resistance<br>• Good compression set, abrasion resistance and tensile strength<br><br>Disadvantage:<br>• Not recommended for using in highly polar solvents such as acetone, and MEK, ozone, chlorinated hydrocarbons and nitro hydrocarbons |

Varies certified compounds are available, please contact sales for more details.

| POLY-ACRYLATE | NEOPRENE | HYPALON | SILICONE | FLUORO SILICONE | FLUORO ELASTOMERS | PERFLUORO ELASTOMERS |
|---|---|---|---|---|---|---|
| ACM / PA<br>DF, DH<br>TB<br>Copolymer Ethyl Butyl Acrylate | Neoprene<br>BC, BE<br>SC<br>Polychloroprene | Hypalon<br>CE<br>SC<br>Chlorosulfonated/ polyethylene | Silicone<br>FC, FE, GE<br>TA<br>Polysiloxane | Fluorosilicone<br>FK<br>MIL-R-25988, Amend.2<br>Fluorosilicone | Fluoro Elastomers<br>HK<br>MIL-R-25897/MIL-R-83248<br>Fluorinated Hydrocarbon | FFKM<br>KK<br><br>Perfluorinated Hydrocarbon |
| 40- 90<br>500-2500<br>100-450<br>Poor to Good<br>Fair to Good<br>Fair to Good<br>Poor to Good<br>Good<br>Excellent<br>- 30° to 0°<br>+ 350° to + 400°<br><br>Good to Excellent<br>Good | 20-95<br>500-3000<br>600<br>Good<br>Excellent<br>Excellent<br>Good<br>Fair<br>Fair<br>+10° to -50°<br>to 225°<br><br>Good<br>Good to Excellent<br>50-90 Shore A | 45-90<br>1000-3000<br>500<br>Fair<br>Fair<br>Excellent<br>Good<br>Fair to Good<br>Fair to Good<br>-30° to -60°<br>to 250°<br><br>Excellent<br>Excellent | 30-90<br>200-1500<br>700<br>Good<br>Good<br>Fair to Poor<br>Poor<br>Poor<br>Fair to Poor<br>-60° to -150°<br>to 450°<br><br>Excellent<br>Good<br>50-90 Shore A | 50-80<br>500-800<br>300<br>Good<br>Excellent<br>Poor<br>Poor<br>Fair<br>Good<br>-80°<br>300°<br><br>Excellent<br>Poor | 60-90<br>500-2000<br>300<br>Good<br>Fair<br>Good<br>Good<br>Excellent<br>Excellent<br>+10° to -10°<br>400° to 600° ( depending on time and service condition )<br>Excellent<br>Good | 60-90<br>1700-2900<br>200<br>Good<br>Good<br>Good<br>Good<br>Excellent<br>Excellent<br>+10° to -10°<br>400° to 600° ( depending on time and service condition )<br>Excellent<br>Poor |
| Advantage:<br>• Excellent ozone, weather and hot air resistance.<br>• Excellent resistance to lubricants containing many additives at high temperature.<br>• Mainly used in automotive application.<br><br>Disadvantage:<br>• Only a medium physical strength and low elasticity.<br>• Not recommended for ketones, low molecular weight esters and nitro containing compounds. | Advantage:<br>• High resilience with low compression set<br>• Flame resistance<br>• Compounds free of sulphur are easily made<br>• Animal and vegetable oil resistance<br>• Not affected by moderate chemicals, fats, greases and many oils and solvents<br><br>Disadvantage:<br>• Not recommended for strong oxidizing acids, esters, ketones, chlorinated aromatic and nitro hydrocarbons | Advantage:<br>• Good resistance to oxidation and ozone, as well as flame resistance<br>• Similar to neoprene except with improved acid resistance<br>• Abrasion resistance is excellent<br>• The equivalent of nitrile, low friction surface<br>• The oil and solvent resistance about inter-mediate between neoprene and nitrile<br>• Recommended for immersion in water<br><br>Disadvantage:<br>• Not recommended for exposure to concentrated oxidizing acids, esters, ketones, chlorinated, aromatic and nitro hydrocarbons | Advantage:<br>• Being compounded to have tensile in the area of 1500 PSI and tear up yo 200 lbs<br>• Low compression set and good resilience<br>• Moderate solvent resistance<br>• Excellent heat resistance<br>• Good release characteristics<br>• Extreme low temperature properties<br>• Highly resistance to oxidation and ozone attack<br><br>Disadvantage:<br>• Not recommended for most concentrated solvents, oils, concentrated acids and dilute sodium hydroxide | Advantage:<br>• More expensive than silicone, and for special applications where general resistance to oxidizing chemicals, aromatic and chlorinated solvent bases is required<br><br>Disadvantage:<br>• Not recommended for and general attacked when exposed to brake fluids, hydrazine and ketones<br>• Should not be confused with silicone in regard to high heat resistance | Advantage:<br>• Heat resistance up to 600°F<br>• Resistance to wide range of oils and solvents; specially all aliphatic, aromatic and halogenated hydrocarbons, acids, animal and vegetable oils<br><br>Disadvantage:<br>• Not recommended for ketones, low molecular weight esters and nitro containing compounds | Advantage:<br>• Heat resistance up to 600°F.<br>• Resistance to wide range of oils and solvents; specially all aliphatic, aromatic and halogenated hydrocarbons, acids, animal and vegetable oils.<br>• Excellent outgassing performance in vacuum environments.<br><br>Disadvantage:<br>• Avoid low-molecular-weight, fully halogenated fluids and molten alkali metals. |

# INSPECTION STANDARD

## ■ OUTER APPEARANCE

## ■ SAMPLING PLAN

We use AQL 1.5 (C=0 sampling plan according to MIL 105E) for normal O-RING orders if no other sampling requirements.
For example: When order guantity is 700 pcs, 27 in 700 will be inspected. The 700-pc lot will be accepted only when no defective part in the sampled 27 pcs.

### ZERO ACCEPTANCE NUMBER SAMPLING PLANS
### INDEX VALUES
### (ASSOCIATED AQLS)

| | .010 | .015 | .025 | .040 | .065 | .10 | .15 | .25 | .40 | .65 | 1.0 | 1.5 | 2.5 | 4.0 | 6.5 | 10.0 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| LOT SIZE | SAMPLE SIZE | | | | | | | | | | | | | | | |
| 2 to 8 | * | * | * | * | * | * | * | * | * | * | * | * | 5 | 3 | 2 | 2 |
| 9to 15 | * | * | * | * | * | * | * | * | * | * | 13 | 8 | 5 | 3 | 2 | 2 |
| 16 to 25 | * | * | * | * | * | * | * | * | * | 20 | 13 | 8 | 5 | 3 | 3 | 2 |
| 26 to 50 | * | * | * | * | * | * | * | * | 32 | 20 | 13 | 8 | 5 | 5 | 5 | 3 |
| 51 to 90 | * | * | * | * | * | * | 80 | 50 | 32 | 20 | 13 | 8 | 7 | 6 | 5 | 4 |
| 91 to 150 | * | * | * | * | * | 125 | 80 | 50 | 32 | 20 | 13 | 12 | 11 | 7 | 6 | 5 |
| 151 to 280 | * | * | * | * | 200 | 125 | 80 | 50 | 32 | 20 | 20 | 19 | 13 | 10 | 7 | 6 |
| 281 to 500 | * | * | * | 315 | 200 | 125 | 80 | 50 | 48 | 47 | 29 | 21 | 16 | 11 | 9 | 7 |
| 501 to 1,200 | * | 800 | 500 | 315 | 200 | 125 | 80 | 75 | 73 | 47 | 34 | 27 | 19 | 15 | 11 | 8 |
| 1,201 to 3,200 | 1250 | 800 | 500 | 315 | 200 | 125 | 120 | 116 | 73 | 53 | 42 | 35 | 23 | 18 | 13 | 9 |
| 3,201 to 10,000 | 1250 | 800 | 500 | 315 | 200 | 192 | 189 | 116 | 86 | 68 | 50 | 38 | 29 | 22 | 15 | 9 |
| 10,001 to 35,000 | 1250 | 800 | 500 | 315 | 300 | 294 | 189 | 135 | 108 | 77 | 60 | 46 | 35 | 29 | 15 | 9 |
| 35,001 to 150,000 | 1250 | 800 | 500 | 490 | 476 | 294 | 218 | 170 | 123 | 96 | 74 | 56 | 40 | 29 | 15 | 9 |
| 150,001 to 500,000 | 1250 | 800 | 750 | 715 | 476 | 345 | 270 | 200 | 156 | 119 | 90 | 64 | 40 | 29 | 15 | 9 |
| Up to 500,000 | 1250 | 1200 | 1112 | 715 | 556 | 435 | 303 | 244 | 189 | 143 | 102 | 64 | 40 | 29 | 15 | 9 |

The sign “*” indicates entire lot must be inspected

# TYPICAL O-RING DEFECTS

Typical visible defects of O-Ring are shown below. We classify these imperfections into two categories:imperfections of Type Characteristic N (normal) and imperfections of Type Characteristic S (special).

## ■ TYPE CHARACTERISTIC N:

O-Ring falling under the characteristic meets standard quality requirements.

## ■ TYPE CHARACTERISTIC S:

O-Ring falling under the characteristic is subject to exceptional demands. The permissible flaw sizes are very limited.

| Type of deviation | Cross Section principle | size | Type characteristic N | | | | | Type characteristic S | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | .070 | .104 | .140 | .209 | .276 | .070 | .104 | .140 | .209 | .276 |
| | | | Maximum size | | | | | | | | | |
| Offset and form deviations (mismatch) |  | e | .003 | .004 | .005 | .006 | .006 | .003 | .003 | .004 | .005 . | 005 |
| Bead, burn offset combined (flash) |  | f | .004 | .005 | .006 | .006 | .007 | .004 | .004 | .005 | .006 | .006 |
| Notch |  | g | .007 | .011 | .014 | .021 | .028 | .004 | .006 | .008 | .008 | .012 |
| | | h | .003 | .003 | .004 | .004 | .005 | .003 | .003 | .004 | .004 | .005 |
| Deburring area |  | | Deviations from the round cross-section are permissable if the flattening has a smooth transition into the round surface and $d_2$ is maintained. | | | | | | | | | |
| Flow lines (radial) elongation is not permissible (void) |  | | .002 x $d_1$ or * | | | | | .001 x $d_1$ or * | | | | |
| | | j | .059 | .059 | .256 | .256 | .256 | .059 | .059 | .039 | .197 | .197 |
| | | k | .003 | | | | | .002 | | | | |
| Recesses distortion (void) |  | l | .024 | .031 | .039 | .051 | .067 | .006 | .010 | .016 | .025 | .039 |
| | | m | .003 | .003 | .004 | .004 | .005 | .003 | .003 | .004 | .004 | .005 |
| Foreign Particles | | | not permissible | | | | | | | | | |

＊ Depending on which value is larger
d1=Inside diameter

The only difference between these two types is the extent of defect permissible. The tolerances are still observed according to the standards used.

Thus the extent of defect permissible is an indication of quality control in the production and finishing processes.

# STANDARD TOLERANCE

## Cross Section Tolerance

- Imperial sizes refer to American Standard AS 568A and British Standard BS 1806.
- Japanese metric sizes refer to JISB 2401.
- For all other metric sizes or non-standard sizes, please refer to the following tables.

| Cross section (in) $d_2$ | Tolerance (in) + / − | Cross section (in) $d_2$ | Tolerance (in) + / − |
|---|---|---|---|
| to 0.071 | 0.003 | 0.209-0.276 | 0.006 |
| 0.071-0.104 | 0.004 | 0.276-0.315 | 0.007 |
| 0.104-0.140 | 0.004 | 0.315-0.394 | 0.008 |
| 0.140-0.209 | 0.005 | 0.394-0.472 | 0.010 |

## Inside diameters $d_1$

| Inside diameter $d_1$ | Tolerance + / − | Inside diameter $d_1$ | Tolerance + / − |
|---|---|---|---|
| to 0.098 | 0.005 | 1.772-1.819 | 0.017 |
| 0.098-0.177 | 0.006 | 1.819-1.858 | 0.017 |
| 0.177-0.248 | 0.006 | 1.858-1.898 | 0.018 |
| 0.248-0.335 | 0.006 | 1.898-1.969 | 0.018 |
| 0.335-0.394 | 0.007 | 1.969-2.028 | 0.019 |
| 0.394-0.441 | 0.007 | 2.028-2.087 | 0.019 |
| 0.441-0.551 | 0.007 | 2.087-2.146 | 0.020 |
| 0.551-0.630 | 0.008 | 2.146-2.205 | 0.020 |
| 0.630-0.709 | 0.008 | 2.205-2.283 | 0.020 |
| 0.709-0.787 | 0.009 | 2.283-2.362 | 0.021 |
| 0.787-0.835 | 0.009 | 2.362-2.421 | 0.022 |
| 0.835-0.929 | 0.009 | 2.421-2.480 | 0.022 |
| 0.929-0.984 | 0.010 | 2.480-2.559 | 0.023 |
| 0.984-1.043 | 0.010 | 2.559-2.638 | 0.023 |
| 1.043-1.102 | 0.011 | 2.638-2.717 | 0.024 |
| 1.102-1.181 | 0.011 | 2.717-2.795 | 0.025 |
| 1.181-1.240 | 0.012 | 2.795-2.874 | 0.025 |
| 1.240-1.319 | 0.013 | 2.874-2.953 | 0.026 |
| 1.319-1.358 | 0.013 | 2.953-3.051 | 0.026 |
| 1.358-1.398 | 0.013 | 3.051-3.150 | 0.027 |
| 1.398-1.437 | 0.014 | 3.150-3.248 | 0.028 |
| 1.437-1.476 | 0.014 | 3.248-3.346 | 0.029 |
| 1.476-1.524 | 0.015 | 3.346-3.445 | 0.030 |
| 1.524-1.575 | 0.015 | 3.445-3.543 | 0.030 |

| Inside diameter d1 | Tolerance + / − | Inside diameter d1 | Tolerance + / − |
|---|---|---|---|
| 1.575-1.622 | 0.015 | 3.543-3.642 | 0.031 |
| 1.622-1.673 | 0.017 | 3.642-3.740 | 0.032 |
| 1.673-1.720 | 0.016 | 3.740-3.839 | 0.033 |
| 1.720-1.772 | 0.017 | 3.839-3.937 | 0.033 |
| 3.937-4.055 | 0.034 | 10.157-10.433 | 0.078 |
| 4.055-4.173 | 0.035 | 10.433-10.709 | 0.080 |
| 4.173-4.291 | 0.036 | 10.709-11.024 | 0.082 |
| 4.291-4.409 | 0.037 | 11.024-11.417 | 0.084 |
| 4.409-4.528 | 0.037 | 11.417-11.811 | 0.087 |
| 4.528-4.646 | 0.038 | 11.811-12.087 | 0.089 |
| 4.646-4.803 | 0.039 | 12.087-12.402 | 0.091 |
| 4.803-4.921 | 0.041 | 12.402-12.795 | 0.093 |
| 4.921-5.039 | 0.041 | 12.795-13.189 | 0.096 |
| 5.039-5.197 | 0.043 | 13.189-13.583 | 0.098 |
| 5.197-5.354 | 0.043 | 13.583-13.976 | 0.101 |
| 5.354-5.512 | 0.044 | 13.976-14.370 | 0.103 |
| 5.512-5.709 | 0.046 | 14.370-14.764 | 0.106 |
| 5.709-5.906 | 0.047 | 14.764-15.236 | 0.109 |
| 5.906-6.102 | 0.049 | 15.236-15.748 | 0.112 |
| 6.102-6.299 | 0.050 | 15.748-16.220 | 0.115 |
| 6.299-6.496 | 0.052 | 16.220-16.732 | 0.118 |
| 6.496-6.693 | 0.053 | 16.732-17.205 | 0.121 |
| 6.693-6.890 | 0.054 | 17.205-17.717 | 0.124 |
| 6.890-7.087 | 0.056 | 17.717-18.189 | 0.127 |
| 7.087-7.283 | 0.057 | 18.189-18.701 | 0.130 |
| 7.283-7.480 | 0.058 | 18.701-19.094 | 0.133 |
| 7.480-7.677 | 0.059 | 19.094-19.685 | 0.136 |
| 7.677-7.874 | 0.061 | 19.685-20.276 | 0.139 |
| 7.874-8.110 | 0.063 | 20.276-20.866 | 0.143 |
| 8.110-8.346 | 0.064 | 20.866-21.457 | 0.146 |
| 8.346-8.583 | 0.066 | 21.457-22.047 | 0.150 |
| 8.583-8.819 | 0.067 | 22.047-22.835 | 0.155 |
| 8.819-9.055 | 0.069 | 22.835-23.622 | 0.159 |
| 9.055-9.291 | 0.070 | 23.622-24.213 | 0.163 |
| 9.291-9.567 | 0.072 | 24.213-24.803 | 0.166 |
| 9.567-9.843 | 0.074 | 24.803-25.591 | 0.171 |
| 9.843-10.157 | 0.076 | 25.591-26.378 | 0.176 |

# O-RING S07A
# X-RING S22A

## AS568 STANDARD SERIES

| AS568- | NOMINAL SIZE INCHES | | | ACTUAL SIZE MILLIMETERS | | | |
|---|---|---|---|---|---|---|---|
| | I.D. | O.D. | C.S. | I.D. | ± | C.S. | ± |
| 001 | 1/32 | 3/32 | 1/32 | 0.74 | 0.10 | 1.02 | .08 |
| 002 | 3/64 | 9/64 | 3/64 | 1.07 | 0.10 | 1.27 | .08 |
| 003 | 1/16 | 3/16 | 1/16 | 1.42 | 0.10 | 1.52 | .08 |
| 004 | 5/64 | 13/64 | 1/16 | 1.78 | 0.13 | 1.78 | .08 |
| 005 | 3/32 | 7/32 | 1/16 | 2.57 | 0.13 | 1.78 | .08 |
| 006 | 1/8 | 1/4 | 1/16 | 2.90 | 0.13 | 1.78 | .08 |
| 007 | 5/32 | 9/32 | 1/16 | 3.68 | 0.13 | 1.78 | .08 |
| 008 | 3/16 | 5/16 | 1/16 | 4.47 | 0.13 | 1.78 | .08 |
| 009 | 7/32 | 11/32 | 1/16 | 5.28 | 0.13 | 1.78 | .08 |
| 010 | 1/4 | 3/8 | 1/16 | 6.07 | 0.13 | 1.78 | .08 |
| 011 | 5/16 | 7/16 | 1/16 | 7.65 | 0.13 | 1.78 | .08 |
| 012 | 3/8 | 1/2 | 1/16 | 9.25 | 0.13 | 1.78 | .08 |
| 013 | 7/16 | 9/16 | 1/16 | 10.82 | 0.13 | 1.78 | .08 |
| 014 | 1/2 | 5/8 | 1/16 | 12.42 | 0.13 | 1.78 | .08 |
| 015 | 9/16 | 11/16 | 1/16 | 14.00 | 0.18 | 1.78 | .08 |
| 016 | 5/8 | 3/7 | 1/16 | 15.60 | 0.23 | 1.78 | .08 |
| 017 | 11/16 | 13/16 | 1/16 | 17.17 | 0.23 | 1.78 | .08 |
| 018 | 3/4 | 7/8 | 1/16 | 18.77 | 0.23 | 1.78 | .08 |
| 019 | 13/16 | 15/16 | 1/16 | 20.35 | 0.23 | 1.78 | .08 |
| 020 | 7/8 | 1 | 1/16 | 21.95 | 0.23 | 1.78 | .08 |
| 021 | 15/16 | 1-1/16 | 1/16 | 23.52 | 0.23 | 1.78 | .08 |
| 022 | 1 | 1-1/8 | 1/16 | 25.12 | 0.25 | 1.78 | .08 |
| 023 | 1-1/16 | 1-3/16 | 1/16 | 26.70 | 0.25 | 1.78 | .08 |
| 024 | 1-1/8 | 1-1/4 | 1/16 | 28.30 | 0.25 | 1.78 | .08 |
| 025 | 1-3/16 | 1-5/16 | 1/16 | 29.87 | 0.28 | 1.78 | .08 |
| 026 | 1-1/4 | 1-3/8 | 1/16 | 31.47 | 0.28 | 1.78 | .08 |
| 027 | 1-5/16 | 1-7/16 | 1/16 | 33.05 | 0.28 | 1.78 | .08 |
| 028 | 1-3/8 | 1-1/2 | 1/16 | 34.65 | 0.33 | 1.78 | .08 |
| 029 | 1-1/2 | 1-5/8 | 1/16 | 37.82 | 0.33 | 1.78 | .08 |
| 030 | 1-5/8 | 1-3/4 | 1/16 | 41.00 | 0.33 | 1.78 | .08 |
| 031 | 1-3/4 | 1-7/8 | 1/16 | 44.17 | 0.38 | 1.78 | .08 |
| 032 | 1-7/8 | 2 | 1/16 | 47.35 | 0.38 | 1.78 | .08 |
| 033 | 2 | 2-1/8 | 1/16 | 50.52 | 0.46 | 1.78 | .08 |
| 034 | 2-1/8 | 1-1/4 | 1/16 | 53.70 | 0.46 | 1.78 | .08 |
| 035 | 2-1/4 | 2-3/8 | 1/16 | 56.87 | 0.46 | 1.78 | .08 |
| 036 | 2-3/8 | 2-1/2 | 1/16 | 60.05 | 0.46 | 1.78 | .08 |
| 037 | 2-1/2 | 2-5/8 | 1/16 | 63.22 | 0.46 | 1.78 | .08 |
| 038 | 2-5/8 | 2-3/4 | 1/16 | 66.40 | 0.51 | 1.78 | .08 |
| 039 | 2-3/4 | 2-7/8 | 1/16 | 69.57 | 0.51 | 1.78 | .08 |
| 040 | 2-7/8 | 3 | 1/16 | 72.75 | 0.51 | 1.78 | .08 |
| 041 | 3 | 3-1/8 | 1/16 | 75.92 | 0.51 | 1.78 | .08 |
| 042 | 3-1/4 | 3-1/8 | 1/16 | 82.27 | 0.61 | 1.78 | .08 |
| 043 | 3-1/2 | 3-5/8 | 1/16 | 88.62 | 0.61 | 1.78 | .08 |
| 044 | 3-3/4 | 3-7/8 | 1/16 | 94.97 | 0.69 | 1.78 | .08 |
| 045 | 4 | 4-1/8 | 1/16 | 101.32 | 0.69 | 1.78 | .08 |
| 046 | 4-1/4 | 4-3/8 | 1/16 | 107.67 | 0.76 | 1.78 | .08 |
| 047 | 4-1/2 | 4-5/8 | 1/16 | 114.02 | 0.76 | 1.78 | .08 |
| 048 | 4-3/4 | 4-7/8 | 1/16 | 120.37 | 0.76 | 1.78 | .08 |
| 049 | 5 | 5-1/8 | 1/16 | 126.72 | 0.94 | 1.78 | .08 |
| 050 | 5-1/4 | 5-3/8 | 1/16 | 133.07 | 0.94 | 1.78 | .08 |
| 102 | 1/16 | 1/4 | 3/32 | 1.24 | 0.13 | 2.62 | .08 |
| 103 | 3/32 | 9/32 | 3/32 | 2.06 | 0.13 | 2.62 | .08 |
| 104 | 1/8 | 5/16 | 3/32 | 2.84 | 0.13 | 2.62 | .08 |
| 105 | 5/32 | 11/32 | 3/32 | 3.63 | 0.13 | 2.62 | .08 |
| 106 | 3/16 | 3/8 | 3/32 | 4.42 | 0.13 | 2.62 | .08 |

| AS568- | NOMINAL SIZE INCHES | | | ACTUAL SIZE MILLIMETERS | | | |
|---|---|---|---|---|---|---|---|
| | I.D. | O.D. | C.S. | I.D. | ± | C.S. | ± |
| 107 | 7/32 | 13/32 | 3/32 | 5.23 | 0.13 | 2.62 | .08 |
| 108 | 1/4 | 7/16 | 3/32 | 6.02 | 0.13 | 2.62 | .08 |
| 109 | 5/16 | 1/2 | 3/32 | 7.59 | 0.13 | 2.62 | .08 |
| 110 | 3/8 | 9/16 | 3/32 | 9.19 | 0.13 | 2.62 | .08 |
| 111 | 7/16 | 5/8 | 3/32 | 10.77 | 0.13 | 2.62 | .08 |
| 112 | 1/2 | 11/16 | 3/32 | 12.37 | 0.13 | 2.62 | .08 |
| 113 | 9/16 | 3/4 | 3/32 | 13.94 | 0.18 | 2.62 | .08 |
| 114 | 5/8 | 13/16 | 3/32 | 15.54 | 0.23 | 2.62 | .08 |
| 115 | 11/16 | 7/8 | 3/32 | 17.12 | 0.23 | 2.62 | .08 |
| 116 | 3/4 | 15/16 | 3/32 | 18.72 | 0.23 | 2.62 | .08 |
| 117 | 13/16 | 1 | 3/32 | 20.30 | 0.25 | 2.62 | .08 |
| 118 | 7/8 | 1-1/16 | 3/32 | 21.89 | 0.25 | 2.62 | .08 |
| 119 | 15/16 | 1-1/8 | 3/32 | 23.47 | 0.25 | 2.62 | .08 |
| 120 | 1 | 1-3/16 | 3/32 | 25.07 | 0.25 | 2.62 | .08 |
| 121 | 1-1/16 | 1-1/4 | 3/32 | 26.64 | 0.25 | 2.62 | .08 |
| 122 | 1-1/8 | 1-5/16 | 3/32 | 28.24 | 0.25 | 2.62 | .08 |
| 123 | 1-3/16 | 1-3/8 | 3/32 | 29.82 | 0.30 | 2.62 | .08 |
| 124 | 1-1/4 | 1-7/16 | 3/32 | 31.42 | 0.30 | 2.62 | .08 |
| 125 | 1-5/16 | 1-1/2 | 3/32 | 32.99 | 0.30 | 2.62 | .08 |
| 126 | 1-3/8 | 1-9/19 | 3/32 | 34.59 | 0.30 | 2.62 | .08 |
| 127 | 1-7/16 | 1-5/8 | 3/32 | 36.17 | 0.30 | 2.62 | .08 |
| 128 | 1-1/2 | 1-11/16 | 3/32 | 37.77 | 0.30 | 2.62 | .08 |
| 129 | 1-9/16 | 1-3/4 | 3/32 | 39.34 | 0.38 | 2.62 | .08 |
| 130 | 1-5/8 | 1-13/16 | 3/32 | 40.94 | 0.38 | 2.62 | .08 |
| 131 | 1-11/16 | 1-7/8 | 3/32 | 42.52 | 0.38 | 2.62 | .08 |
| 132 | 1-3/4 | 1-15/16 | 3/32 | 44.12 | 0.38 | 2.62 | .08 |
| 133 | 1-13/16 | 2 | 3/32 | 45.69 | 0.38 | 2.62 | .08 |
| 134 | 1-7/8 | 2-1/16 | 3/32 | 47.29 | 0.38 | 2.62 | .08 |
| 135 | 1-15/16 | 2-1/8 | 3/32 | 48.90 | 0.43 | 2.62 | .08 |
| 136 | 2 | 2-3/16 | 3/32 | 50.47 | 0.43 | 2.62 | .08 |
| 137 | 2-1/16 | 2-1/4 | 3/32 | 52.07 | 0.43 | 2.62 | .08 |
| 138 | 2-1/8 | 2-5/16 | 3/32 | 53.64 | 0.43 | 2.62 | .08 |
| 139 | 2-3/16 | 2-3/8 | 3/32 | 55.25 | 0.43 | 2.62 | .08 |
| 140 | 2-1/4 | 2-7/16 | 3/32 | 56.82 | 0.43 | 2.62 | .08 |
| 141 | 2-5/16 | 2-1/2 | 3/32 | 58.42 | 0.51 | 2.62 | .08 |
| 142 | 2-3/8 | 2-9/16 | 3/32 | 59.99 | 0.51 | 2.62 | .08 |
| 143 | 2-7/16 | 2-5/8 | 3/32 | 61.60 | 0.51 | 2.62 | .08 |
| 144 | 2-1/2 | 2-11/16 | 3/32 | 63.17 | 0.51 | 2.62 | .08 |
| 145 | 2-9/16 | 2-3/4 | 3/32 | 64.77 | 0.51 | 2.62 | .08 |
| 146 | 2-5/8 | 2-13/16 | 3/32 | 66.34 | 0.51 | 2.62 | .08 |
| 147 | 2-11/16 | 2-7/8 | 3/32 | 67.95 | 0.56 | 2.62 | .08 |
| 148 | 2-3/4 | 2-15/16 | 3/32 | 69.52 | 0.56 | 2.62 | .08 |
| 149 | 2-13/16 | 3 | 3/32 | 71.12 | 0.56 | 2.62 | .08 |
| 150 | 2-7/8 | 3-1/16 | 3/32 | 72.69 | 0.56 | 2.62 | .08 |
| 151 | 3 | 3-3/16 | 3/32 | 75.87 | 0.61 | 2.62 | .08 |
| 152 | 3-1/4 | 3-7/16 | 3/32 | 82.22 | 0.61 | 2.62 | .08 |
| 153 | 3-1/2 | 3-11/16 | 3/32 | 88.57 | 0.61 | 2.62 | .08 |
| 154 | 3-3/4 | 3-15/16 | 3/32 | 94.92 | 0.71 | 2.62 | .08 |
| 155 | 4 | 4-3/16 | 3/32 | 101.27 | 0.71 | 2.62 | .08 |
| 156 | 4-1/4 | 4-7/16 | 3/32 | 107.62 | 0.76 | 2.62 | .08 |
| 157 | 4-1/2 | 4-11/16 | 3/32 | 113.97 | 0.76 | 2.62 | .08 |
| 158 | 4-3/4 | 4-15/16 | 3/32 | 120.32 | 0.76 | 2.62 | .08 |
| 159 | 5 | 5-3/16 | 3/32 | 126.67 | 0.89 | 2.62 | .08 |
| 160 | 5-1/4 | 5-7/16 | 3/32 | 133.02 | 0.89 | 2.62 | .08 |
| 161 | 5-1/2 | 5-11/16 | 3/32 | 139.37 | 0.89 | 2.62 | .08 |
| 162 | 5-3/4 | 5-15/16 | 3/32 | 145.72 | 0.89 | 2.62 | .08 |

| AS568- | NOMINAL SIZE INCHES | | | ACTUAL SIZE MILLIMETERS | | | |
|---|---|---|---|---|---|---|---|
| | I.D. | O.D. | C.S. | I.D. | ± | C.S. | ± |
| 163 | 6 | 6-3/16 | 3/32 | 152.07 | 0.89 | 2.62 | .08 |
| 164 | 6-1/4 | 6-7/16 | 3/32 | 158.42 | 1.02 | 2.62 | .08 |
| 165 | 6-1/2 | 6-11/16 | 3/32 | 164.77 | 1.02 | 2.62 | .08 |
| 166 | 6-3/4 | 6-15/16 | 3/32 | 171.12 | 1.02 | 2.62 | .08 |
| 167 | 7 | 7-3/16 | 3/32 | 177.47 | 1.02 | 2.62 | .08 |
| 168 | 7-1/4 | 7-7/16 | 3/32 | 183.82 | 1.14 | 2.62 | .08 |
| 169 | 7-1/2 | 7-11/16 | 3/32 | 190.17 | 1.14 | 2.62 | .08 |
| 170 | 7-3/4 | 7/15-16 | 3/32 | 196.52 | 1.14 | 2.62 | .08 |
| 171 | 8 | 8-3/16 | 3/32 | 202.87 | 1.14 | 2.62 | .08 |
| 172 | 8-1/4 | 8-7/16 | 3/32 | 209.22 | 1.27 | 2.62 | .08 |
| 173 | 8-1/2 | 8-11/16 | 3/32 | 215.57 | 1.27 | 2.62 | .08 |
| 174 | 8-3/4 | 8-15/16 | 3/32 | 221.92 | 1.27 | 2.62 | .08 |
| 175 | 9 | 9-3/16 | 3/32 | 228.27 | 1.27 | 2.62 | .08 |
| 176 | 9-1/4 | 9-7/16 | 3/32 | 234.62 | 1.40 | 2.62 | .08 |
| 177 | 9-1/2 | 9-11/16 | 3/32 | 240.97 | 1.40 | 2.62 | .08 |
| 178 | 9-3/4 | 9-15/16 | 3/32 | 247.32 | 1.40 | 2.62 | .08 |
| 201 | 3/16 | 7/16 | 1/8 | 4.34 | 0.13 | 3.53 | .10 |
| 202 | 1/4 | 1/2 | 1/8 | 5.94 | 0.13 | 3.53 | .10 |
| 203 | 5/16 | 9/16 | 1/8 | 7.52 | 0.13 | 3.53 | .10 |
| 204 | 3/8 | 5/8 | 1/8 | 9.12 | 0.13 | 3.53 | .10 |
| 205 | 7/16 | 11/16 | 1/8 | 10.69 | 0.13 | 3.53 | .10 |
| 206 | 1/2 | 3/4 | 1/8 | 12.29 | 0.13 | 3.53 | .10 |
| 207 | 9/16 | 13/16 | 1/8 | 13.87 | 0.18 | 3.53 | .10 |
| 208 | 5/8 | 7/8 | 1/8 | 15.47 | 0.23 | 3.53 | .10 |
| 209 | 11/16 | 15/16 | 1/8 | 17.04 | 0.23 | 3.53 | .10 |
| 210 | 3/4 | 1 | 1/8 | 18.64 | 0.25 | 3.53 | .10 |
| 211 | 13/16 | 1-1/16 | 1/8 | 20.22 | 0.25 | 3.53 | .10 |
| 212 | 7/8 | 1-1/8 | 1/8 | 21.82 | 0.25 | 3.53 | .10 |
| 213 | 15/16 | 1-3/16 | 1/8 | 23.39 | 0.25 | 3.53 | .10 |
| 214 | 1 | 1-1/4 | 1/8 | 24.99 | 0.25 | 3.53 | .10 |
| 215 | 1-1/16 | 1-5/16 | 1/8 | 26.57 | 0.25 | 3.53 | .10 |
| 216 | 1-1/8 | 1-3/8 | 1/8 | 28.17 | 0.30 | 3.53 | .10 |
| 217 | 1-3/16 | 1-7/16 | 1/8 | 29.74 | 0.30 | 3.53 | .10 |
| 218 | 1-1/4 | 1-1/2 | 1/8 | 31.34 | 0.30 | 3.53 | .10 |
| 219 | 1-5/16 | 1-9/16 | 1/8 | 32.92 | 0.30 | 3.53 | .10 |
| 220 | 1-3/8 | 1-5/8 | 1/8 | 34.52 | 0.30 | 3.53 | .10 |
| 221 | 1-7/16 | 1-11/16 | 1/8 | 36.09 | 0.30 | 3.53 | .10 |
| 222 | 1-1/2 | 1-3/4 | 1/8 | 37.69 | 0.38 | 3.53 | .10 |
| 223 | 1-5/8 | 1-7/8 | 1/8 | 40.87 | 0.38 | 3.53 | .10 |
| 224 | 1-3/4 | 2 | 1/8 | 44.04 | 0.38 | 3.53 | .10 |
| 225 | 1-7/8 | 2-1/8 | 1/8 | 47.22 | 0.46 | 3.53 | .10 |
| 226 | 2 | 2-1/4 | 1/8 | 50.39 | 0.46 | 3.53 | .10 |
| 227 | 2-1/8 | 2-3/8 | 1/8 | 53.57 | 0.46 | 3.53 | .10 |
| 228 | 2-1/4 | 2-1/2 | 1/8 | 56.74 | 0.51 | 3.53 | .10 |
| 229 | 2-3/8 | 2-5/8 | 1/8 | 59.92 | 0.51 | 3.53 | .10 |
| 230 | 2-1/2 | 2-3/4 | 1/8 | 63.09 | 0.51 | 3.53 | .10 |
| 231 | 2-5/8 | 2-7/8 | 1/8 | 66.27 | 0.51 | 3.53 | .10 |
| 232 | 2-3/4 | 3 | 1/8 | 69.44 | 0.61 | 3.53 | .10 |
| 233 | 2-7/8 | 3-1/8 | 1/8 | 72.62 | 0.61 | 3.53 | .10 |
| 234 | 3 | 3-1/4 | 1/8 | 75.79 | 0.61 | 3.53 | .10 |
| 235 | 3-1/8 | 3-3/8 | 1/8 | 78.97 | 0.61 | 3.53 | .10 |
| 236 | 3-1/4 | 3-1/2 | 1/8 | 82.14 | 0.61 | 3.53 | .10 |
| 237 | 3-3/8 | 3-5/8 | 1/8 | 85.32 | 0.61 | 3.53 | .10 |
| 238 | 3-1/2 | 3-3/4 | 1/8 | 88.49 | 0.61 | 3.53 | .10 |
| 239 | 3-5/8 | 3-7/8 | 1/8 | 91.67 | 0.71 | 3.53 | .10 |
| 240 | 3-3/4 | 4 | 1/8 | 94.84 | 0.71 | 3.53 | .10 |
| 241 | 3-7/8 | 4-1/8 | 1/8 | 98.02 | 0.71 | 3.53 | .10 |
| 242 | 4 | 4-1/4 | 1/8 | 101.19 | 0.71 | 3.53 | .10 |
| 243 | 4-1/8 | 4-3/8 | 1/8 | 104.37 | 0.71 | 3.53 | .10 |
| 244 | 4-1/4 | 4-1/2 | 1/8 | 107.54 | 0.76 | 3.53 | .10 |
| 245 | 4-3/8 | 4-5/8 | 1/8 | 110.72 | 0.76 | 3.53 | .10 |
| 246 | 4-1/2 | 4-3/4 | 1/8 | 113.89 | 0.76 | 3.53 | .10 |
| 247 | 4-5/8 | 4-7/8 | 1/8 | 117.07 | 0.76 | 3.53 | .10 |
| 248 | 4-3/4 | 5 | 1/8 | 120.24 | 0.76 | 3.53 | .10 |
| 249 | 4-7/8 | 5-1/8 | 1/8 | 123.42 | 0.89 | 3.53 | .10 |

| AS568- | NOMINAL SIZE INCHES | | | ACTUAL SIZE MILLIMETERS | | | |
|---|---|---|---|---|---|---|---|
| | I.D. | O.D. | C.S. | I.D. | ± | C.S. | ± |
| 250 | 5 | 5-1/4 | 1/8 | 126.59 | 0.89 | 3.53 | .10 |
| 251 | 5-1/8 | 5-3/8 | 1/8 | 129.77 | 0.89 | 3.53 | .10 |
| 252 | 5-1/4 | 5-1/2 | 1/8 | 132.94 | 0.89 | 3.53 | .10 |
| 253 | 5-3/8 | 5-5/8 | 1/8 | 136.12 | 0.89 | 3.53 | .10 |
| 254 | 5-1/2 | 5-3/4 | 1/8 | 139.29 | 0.89 | 3.53 | .10 |
| 255 | 5-5/8 | 5-7/8 | 1/8 | 142.47 | 0.89 | 3.53 | .10 |
| 256 | 5-3/4 | 6 | 1/8 | 145.64 | 0.89 | 3.53 | .10 |
| 257 | 5-7/8 | 6-1/8 | 1/8 | 148.82 | 0.89 | 3.53 | .10 |
| 258 | 6 | 6-1/4 | 1/8 | 151.99 | 0.89 | 3.53 | .10 |
| 259 | 6-1/4 | 6-1/2 | 1/8 | 158.34 | 1.02 | 3.53 | .10 |
| 260 | 6-1/2 | 6-3/4 | 1/8 | 164.69 | 1.02 | 3.53 | .10 |
| 261 | 6-3/4 | 7 | 1/8 | 171.04 | 1.02 | 3.53 | .10 |
| 262 | 7 | 7-1/4 | 1/8 | 177.39 | 1.02 | 3.53 | .10 |
| 263 | 7-1/4 | 7-1/2 | 1/8 | 183.74 | 1.14 | 3.53 | .10 |
| 264 | 7-1/2 | 7-3/4 | 1/8 | 190.09 | 1.14 | 3.53 | .10 |
| 265 | 7-3/4 | 8 | 1/8 | 196.44 | 1.14 | 3.53 | .10 |
| 266 | 8 | 8-1/4 | 1/8 | 202.79 | 1.14 | 3.53 | .10 |
| 267 | 8-1/4 | 8-1/2 | 1/8 | 209.14 | 1.27 | 3.53 | .10 |
| 268 | 8-1/2 | 8-3/4 | 1/8 | 215.49 | 1.27 | 3.53 | .10 |
| 269 | 8-3/4 | 9 | 1/8 | 221.84 | 1.27 | 3.53 | .10 |
| 270 | 9 | 9-1/4 | 1/8 | 228.19 | 1.27 | 3.53 | .10 |
| 271 | 9-1/4 | 9-1/2 | 1/8 | 234.54 | 1.40 | 3.53 | .10 |
| 272 | 9-1/2 | 9-3/4 | 1/8 | 240.89 | 1.40 | 3.53 | .10 |
| 273 | 9-3/4 | 10 | 1/8 | 247.24 | 1.40 | 3.53 | .10 |
| 274 | 10 | 10-1/4 | 1/8 | 253.59 | 1.40 | 3.53 | .10 |
| 275 | 10-1/2 | 10-3/4 | 1/8 | 266.29 | 1.40 | 3.53 | .10 |
| 276 | 11 | 11-1/4 | 1/8 | 278.99 | 1.65 | 3.53 | .10 |
| 277 | 11-1/2 | 11-3/4 | 1/8 | 291.69 | 1.65 | 3.53 | .10 |
| 278 | 12 | 12-1/4 | 1/8 | 304.39 | 1.65 | 3.53 | .10 |
| 279 | 13 | 13-1/4 | 1/8 | 329.79 | 1.65 | 3.53 | .10 |
| 280 | 14 | 14-1/4 | 1/8 | 355.19 | 1.65 | 3.53 | .10 |
| 281 | 15 | 15-1/4 | 1/8 | 380.59 | 1.65 | 3.53 | .10 |
| 282 | 16 | 16-1/4 | 1/8 | 405.26 | 1.91 | 3.53 | .10 |
| 283 | 17 | 17-1/4 | 1/8 | 430.66 | 2.03 | 3.53 | .10 |
| 284 | 18 | 18-1/4 | 1/8 | 456.06 | 2.16 | 3.53 | .10 |
| 309 | 7/16 | 13/16 | 3/16 | 10.46 | 0.13 | 5.33 | .13 |
| 310 | 1/2 | 7/8 | 3/16 | 12.07 | 0.13 | 5.33 | .13 |
| 311 | 9/16 | 15/16 | 3/16 | 13.64 | 0.18 | 5.33 | .13 |
| 312 | 5/8 | 1 | 3/16 | 15.24 | 0.23 | 5.33 | .13 |
| 313 | 11/16 | 1-1/16 | 3/16 | 16.81 | 0.23 | 5.33 | .13 |
| 314 | 3/4 | 1-1/8 | 3/16 | 18.42 | 0.25 | 5.33 | .13 |
| 315 | 13/16 | 1-3/16 | 3/16 | 19.99 | 0.25 | 5.33 | .13 |
| 316 | 7/8 | 1-1/4 | 3/16 | 21.59 | 0.25 | 5.33 | .13 |
| 317 | 15/16 | 1-5/16 | 3/16 | 23.16 | 0.25 | 5.33 | .13 |
| 318 | 1 | 1-3/8 | 3/16 | 24.77 | 0.25 | 5.33 | .13 |
| 319 | 1-1/16 | 1-7/16 | 3/16 | 26.34 | 0.25 | 5.33 | .13 |
| 320 | 1-1/8 | 1-1/2 | 3/16 | 27.94 | 0.30 | 5.33 | .13 |
| 321 | 1-3/16 | 1-9/16 | 3/16 | 29.51 | 0.30 | 5.33 | .13 |
| 322 | 1-1/4 | 1-5/8 | 3/16 | 31.12 | 0.30 | 5.33 | .13 |
| 323 | 1-5/16 | 1-11/16 | 3/16 | 32.69 | 0.30 | 5.33 | .13 |
| 324 | 1-3/8 | 1-3/4 | 3/16 | 34.29 | 0.30 | 5.33 | .13 |
| 325 | 1-1/2 | 1-7/8 | 3/16 | 37.47 | 0.38 | 5.33 | .13 |
| 326 | 1-5/8 | 2 | 3/16 | 40.64 | 0.38 | 5.33 | .13 |
| 327 | 1-3/4 | 2-1/8 | 3/16 | 43.82 | 0.38 | 5.33 | .13 |
| 328 | 1-7/8 | 2-1/4 | 3/16 | 46.99 | 0.38 | 5.33 | .13 |
| 329 | 2 | 2-3/8 | 3/16 | 50.17 | 0.46 | 5.33 | .13 |
| 330 | 2-1/8 | 2-1/2 | 3/16 | 53.34 | 0.46 | 5.33 | .13 |
| 331 | 2-1/4 | 2-5/8 | 3/16 | 56.52 | 0.46 | 5.33 | .13 |
| 332 | 2-3/8 | 2-3/4 | 3/16 | 59.69 | 0.46 | 5.33 | .13 |
| 333 | 2-1/2 | 2-7/8 | 3/16 | 62.87 | 0.51 | 5.33 | .13 |
| 334 | 2-5/8 | 3 | 3/16 | 66.04 | 0.51 | 5.33 | .13 |
| 335 | 2-3/4 | 3-1/8 | 3/16 | 69.22 | 0.51 | 5.33 | .13 |
| 336 | 2-7/8 | 3-1/4 | 3/16 | 72.39 | 0.51 | 5.33 | .13 |
| 337 | 3 | 3-3/8 | 3/16 | 75.57 | 0.61 | 5.33 | .13 |
| 338 | 3-1/8 | 3-1/2 | 3/16 | 78.74 | 0.61 | 5.33 | .13 |

| AS568- | NOMINAL SIZE INCHES | | | ACTUAL SIZE MILLIMETERS | | | |
|---|---|---|---|---|---|---|---|
| | I.D. | O.D. | C.S. | I.D. | ± | C.S. | ± |
| 339 | 3-1/4 | 3-5/8 | 3/16 | 81.92 | 0.61 | 5.33 | .13 |
| 340 | 3-3/8 | 3-3/4 | 3/16 | 85.09 | 0.61 | 5.33 | .13 |
| 341 | 3-1/2 | 3-7/8 | 3/16 | 88.27 | 0.61 | 5.33 | .13 |
| 342 | 3-5/8 | 4 | 3/16 | 91.44 | 0.71 | 5.33 | .13 |
| 343 | 3-3/4 | 4-1/8 | 3/16 | 94.62 | 0.71 | 5.33 | .13 |
| 344 | 3-7/8 | 4-1/4 | 3/16 | 97.79 | 0.71 | 5.33 | .13 |
| 345 | 4 | 4-3/8 | 3/16 | 100.97 | 0.71 | 5.33 | .13 |
| 346 | 4-1/8 | 4-1/2 | 3/16 | 104.14 | 0.71 | 5.33 | .13 |
| 347 | 4-1/4 | 4-5/8 | 3/16 | 107.32 | 0.76 | 5.33 | .13 |
| 348 | 4-3/8 | 4-3/4 | 3/16 | 110.49 | 0.76 | 5.33 | .13 |
| 349 | 4-1/2 | 4-7/8 | 3/16 | 113.67 | 0.76 | 5.33 | .13 |
| 350 | 4-5/8 | 5 | 3/16 | 116.84 | 0.76 | 5.33 | .13 |
| 351 | 4-3/4 | 5-1/8 | 3/16 | 120.02 | 0.76 | 5.33 | .13 |
| 352 | 4-7/8 | 5-1/4 | 3/16 | 123.19 | 0.76 | 5.33 | .13 |
| 353 | 5 | 5-3/8 | 3/16 | 126.37 | 0.94 | 5.33 | .13 |
| 354 | 5-1/8 | 5-1/2 | 3/16 | 129.54 | 0.94 | 5.33 | .13 |
| 355 | 5-1/4 | 5-5/8 | 3/16 | 132.72 | 0.94 | 5.33 | .13 |
| 356 | 5-3/8 | 5-3/4 | 3/16 | 135.89 | 0.94 | 5.33 | .13 |
| 357 | 5-1/2 | 5-7/8 | 3/16 | 139.07 | 0.94 | 5.33 | .13 |
| 358 | 5-5/8 | 6 | 3/16 | 142.24 | 0.94 | 5.33 | .13 |
| 359 | 5-3/4 | 6-1/8 | 3/16 | 145.42 | 0.94 | 5.33 | .13 |
| 360 | 5-7/8 | 6-1/4 | 3/16 | 148.59 | 0.94 | 5.33 | .13 |
| 361 | 6 | 6-3/8 | 3/16 | 151.77 | 0.94 | 5.33 | .13 |
| 362 | 6-1/4 | 6-5/8 | 3/16 | 158.12 | 1.02 | 5.33 | .13 |
| 363 | 6-1/2 | 6-7/8 | 3/16 | 164.47 | 1.02 | 5.33 | .13 |
| 364 | 6-3/4 | 7-1/8 | 3/16 | 170.82 | 1.02 | 5.33 | .13 |
| 365 | 7 | 7-3/8 | 3/16 | 177.17 | 1.02 | 5.33 | .13 |
| 366 | 7-1/4 | 7-5/8 | 3/16 | 183.52 | 1.14 | 5.33 | .13 |
| 367 | 7-1/2 | 7-7/8 | 3/16 | 189.87 | 1.14 | 5.33 | .13 |
| 368 | 7-3/4 | 8-1/8 | 3/16 | 196.22 | 1.14 | 5.33 | .13 |
| 369 | 8 | 8-3/8 | 3/16 | 202.57 | 1.14 | 5.33 | .13 |
| 370 | 8-1/4 | 8-5/8 | 3/16 | 208.92 | 1.27 | 5.33 | .13 |
| 371 | 8-1/2 | 8-7/8 | 3/16 | 215.27 | 1.27 | 5.33 | .13 |
| 372 | 8-3/4 | 9-1/8 | 3/16 | 221.62 | 1.27 | 5.33 | .13 |
| 373 | 9 | 9-3/8 | 3/16 | 227.97 | 1.27 | 5.33 | .13 |
| 374 | 9-1/4 | 9-5/8 | 3/16 | 234.32 | 1.40 | 5.33 | .13 |
| 375 | 9-1/2 | 9-7/8 | 3/16 | 240.67 | 1.40 | 5.33 | .13 |
| 376 | 9-3/4 | 10-1/8 | 3/16 | 247.02 | 1.40 | 5.33 | .13 |
| 377 | 10 | 10-3/8 | 3/16 | 253.37 | 1.40 | 5.33 | .13 |
| 378 | 10-1/2 | 10-7/8 | 3/16 | 266.07 | 1.52 | 5.33 | .13 |
| 379 | 11 | 11-3/8 | 3/16 | 278.77 | 1.52 | 5.33 | .13 |
| 380 | 11-1/2 | 11-7/8 | 3/16 | 291.47 | 1.65 | 5.33 | .13 |
| 381 | 12 | 12-3/8 | 3/16 | 304.17 | 1.65 | 5.33 | .13 |
| 382 | 13 | 13-3/8 | 3/16 | 329.57 | 1.65 | 5.33 | .13 |
| 383 | 14 | 14-3/8 | 3/16 | 354.97 | 1.78 | 5.33 | .13 |
| 384 | 15 | 15-3/8 | 3/16 | 380.37 | 1.78 | 5.33 | .13 |
| 385 | 16 | 16-3/8 | 3/16 | 405.26 | 1.91 | 5.33 | .13 |
| 386 | 17 | 17-3/8 | 3/16 | 430.66 | 2.03 | 5.33 | .13 |
| 387 | 18 | 18-3/8 | 3/16 | 456.06 | 2.16 | 5.33 | .13 |
| 388 | 19 | 19-3/8 | 3/16 | 481.41 | 2.29 | 5.33 | .13 |
| 389 | 20 | 20-3/8 | 3/16 | 506.81 | 2.41 | 5.33 | .13 |
| 390 | 21 | 21-3/8 | 3/16 | 532.21 | 2.41 | 5.33 | .13 |
| 391 | 22 | 22-3/8 | 3/16 | 557.61 | 2.54 | 5.33 | .13 |
| 392 | 23 | 23-3/8 | 3/16 | 582.68 | 2.67 | 5.33 | .13 |
| 393 | 24 | 24-3/8 | 3/16 | 608.08 | 2.79 | 5.33 | .13 |
| 394 | 25 | 25-3/8 | 3/16 | 633.48 | 2.92 | 5.33 | .13 |
| 395 | 26 | 26-3/8 | 3/16 | 658.88 | 3.05 | 5.33 | .13 |
| 425 | 4-1/2 | 5 | 1/4 | 113.67 | 0.84 | 6.99 | .15 |
| 426 | 4-5/8 | 5-1/8 | 1/4 | 116.84 | 0.84 | 6.99 | .15 |
| 427 | 4-3/4 | 5-1/4 | 1/4 | 120.02 | 0.84 | 6.99 | .15 |
| 428 | 4-7/8 | 5-3/8 | 1/4 | 123.19 | 0.84 | 6.99 | .15 |
| 429 | 5 | 5-1/2 | 1/4 | 126.37 | 0.94 | 6.99 | .15 |
| 430 | 5-1/8 | 5-5/8 | 1/4 | 129.54 | 0.94 | 6.99 | .15 |
| 431 | 5-1/4 | 5-3/4 | 1/4 | 132.72 | 0.94 | 6.99 | .15 |

| AS568- | NOMINAL SIZE INCHES | | | ACTUAL SIZE MILLIMETERS | | | |
|---|---|---|---|---|---|---|---|
| | I.D. | O.D. | C.S. | I.D. | ± | C.S. | ± |
| 432 | 5-3/8 | 5-7/8 | 1/4 | 135.89 | 0.94 | 6.99 | .15 |
| 433 | 5-1/2 | 6 | 1/4 | 139.07 | 0.94 | 6.99 | .15 |
| 434 | 5-5/8 | 6-1/8 | 1/4 | 142.24 | 0.94 | 6.99 | .15 |
| 435 | 5-3/4 | 6-1/4 | 1/4 | 145.42 | 0.94 | 6.99 | .15 |
| 436 | 5-7/8 | 6-3/8 | 1/4 | 148.59 | 0.94 | 6.99 | .15 |
| 437 | 6 | 6-1/2 | 1/4 | 151.77 | 0.94 | 6.99 | .15 |
| 438 | 6-1/4 | 6-3/4 | 1/4 | 158.12 | 1.02 | 6.99 | .15 |
| 439 | 6-1/2 | 7 | 1/4 | 164.47 | 1.02 | 6.99 | .15 |
| 440 | 6-3/4 | 7-1/4 | 1/4 | 170.82 | 1.02 | 6.99 | .15 |
| 441 | 7 | 7-1/2 | 1/4 | 177.17 | 1.02 | 6.99 | .15 |
| 442 | 7-1/4 | 7-3/4 | 1/4 | 183.52 | 1.14 | 6.99 | .15 |
| 443 | 7-1/2 | 8 | 1/4 | 189.87 | 1.14 | 6.99 | .15 |
| 444 | 7-3/4 | 8-1/4 | 1/4 | 196.22 | 1.14 | 6.99 | .15 |
| 445 | 8 | 8-1/2 | 1/4 | 202.57 | 1.14 | 6.99 | .15 |
| 446 | 8-1/2 | 9 | 1/4 | 215.27 | 1.40 | 6.99 | .15 |
| 447 | 9 | 9-1/2 | 1/4 | 227.97 | 1.40 | 6.99 | .15 |
| 448 | 9-1/2 | 10 | 1/4 | 240.67 | 1.40 | 6.99 | .15 |
| 449 | 10 | 10-1/2 | 1/4 | 253.37 | 1.40 | 6.99 | .15 |
| 450 | 10-1/2 | 11 | 1/4 | 266.07 | 1.52 | 6.99 | .15 |
| 451 | 11 | 11-1/2 | 1/4 | 278.77 | 1.52 | 6.99 | .15 |
| 452 | 11-1/2 | 12 | 1/4 | 291.47 | 1.52 | 6.99 | .15 |
| 453 | 12 | 12-1/2 | 1/4 | 304.17 | 1.52 | 6.99 | .15 |
| 454 | 12-1/2 | 13 | 1/4 | 316.87 | 1.52 | 6.99 | .15 |
| 455 | 13 | 13-1/2 | 1/4 | 329.57 | 1.52 | 6.99 | .15 |
| 456 | 13-1/2 | 14 | 1/4 | 342.27 | 1.78 | 6.99 | .15 |
| 457 | 14 | 14-1/2 | 1/4 | 354.97 | 1.78 | 6.99 | .15 |
| 458 | 14-1/2 | 15 | 1/4 | 367.67 | 1.78 | 6.99 | .15 |
| 459 | 15 | 15-1/2 | 1/4 | 380.37 | 1.78 | 6.99 | .15 |
| 460 | 15-1/2 | 16 | 1/4 | 393.07 | 1.78 | 6.99 | .15 |
| 461 | 16 | 16-1/2 | 1/4 | 405.26 | 1.91 | 6.99 | .15 |
| 462 | 16-1/2 | 17 | 1/4 | 417.96 | 1.91 | 6.99 | .15 |
| 463 | 17 | 17-1/2 | 1/4 | 430.66 | 2.03 | 6.99 | .15 |
| 464 | 17-1/2 | 18 | 1/4 | 443.36 | 2.16 | 6.99 | .15 |
| 465 | 18 | 18-1/2 | 1/4 | 456.06 | 2.16 | 6.99 | .15 |
| 466 | 18-1/2 | 19 | 1/4 | 468.76 | 2.16 | 6.99 | .15 |
| 467 | 19 | 19-1/2 | 1/4 | 481.46 | 2.29 | 6.99 | .15 |
| 468 | 19-1/2 | 20 | 1/4 | 494.16 | 2.29 | 6.99 | .15 |
| 469 | 20 | 20-1/2 | 1/4 | 506.86 | 2.41 | 6.99 | .15 |
| 470 | 21 | 21-1/2 | 1/4 | 532.26 | 2.41 | 6.99 | .15 |
| 471 | 22 | 22-1/2 | 1/4 | 557.66 | 2.54 | 6.99 | .15 |
| 472 | 23 | 23-1/2 | 1/4 | 582.68 | 2.67 | 6.99 | .15 |
| 473 | 24 | 24-1/2 | 1/4 | 608.08 | 2.79 | 6.99 | .15 |
| 474 | 25 | 25-1/2 | 1/4 | 633.08 | 2.92 | 6.99 | .15 |
| 475 | 26 | 26-1/2 | 1/4 | 658.88 | 3.05 | 6.99 | .15 |
| 901 | Fractional dimensions listed for tube fitting sizes reflect outside diameter of tube, not dimensions of o-ring | | 3/32 | 4.70 | 0.13 | 1.42 | .08 |
| 902 | | | 1/8 | 6.07 | 0.13 | 1.63 | .08 |
| 903 | | | 3/16 | 7.65 | 0.13 | 1.63 | .08 |
| 904 | | | 1/4 | 8.92 | 0.13 | 1.83 | .08 |
| 905 | | | 5/16 | 10.52 | 0.13 | 1.83 | .08 |
| 906 | | | 3/8 | 11.89 | 0.13 | 1.98 | .08 |
| 907 | | | 7/16 | 13.46 | 0.18 | 2.08 | .08 |
| 908 | | | 1/2 | 16.36 | 0.23 | 2.21 | .08 |
| 909 | | | 9/16 | 17.93 | 0.23 | 2.46 | .08 |
| 910 | | | 5/8 | 19.18 | 0.23 | 2.46 | .08 |
| 911 | | | 11/16 | 21.92 | 0.23 | 2.95 | .10 |
| 912 | | | 3/4 | 23.47 | 0.23 | 2.95 | .10 |
| 913 | | | 13/16 | 25.04 | 0.25 | 2.95 | .10 |
| 914 | | | 7/8 | 26.59 | 0.25 | 2.95 | .10 |
| 916 | | | 1 | 29.74 | 0.25 | 2.95 | .10 |
| 918 | | | 1-1/8 | 34.42 | 0.30 | 2.95 | .10 |
| 920 | | | 1-1/4 | 37.47 | 0.36 | 3.00 | .10 |
| 924 | | | 1-1/2 | 43.69 | 0.36 | 3.00 | .10 |
| 928 | | | 1-3/4 | 53.09 | 0.46 | 3.00 | .10 |
| 932 | | | 2 | 59.36 | 0.46 | 3.00 | .10 |

# EUROPEAN METRIC STANDARD SERIES

| MFC NO. | I.D. | C.S. |
|---|---|---|
| SO7E2410 | 24.8 | 0.1 |
| SO7E6422 | 2.51 | 0.35 |
| SO7E9123 | 13 | 0.5 |
| SO7E7324 | 1.8 | 0.61 |
| SO7E6332 | 3.25 | 0.64 |
| SO7E9126 | 10.16 | 0.64 |
| SO7E5825 | 1.85 | 0.66 |
| SO7E6680 | 13.69 | 0.66 |
| SO7E8461 | 17.4 | 0.66 |
| SO7E3616 | 7.9 | 0.79 |
| SO7E3617 | 11.05 | 0.79 |
| SO7E5816 | 7 | 0.8 |
| SO7E5290 | 6.5 | 0.86 |
| SO7E6550 | 14.27 | 0.86 |
| SO7E5289 | 14.63 | 0.86 |
| SO7E2014 | 2.2 | 0.9 |
| SO7E5100 | 2.6 | 0.9 |
| SO7E8080 | 3.56 | 0.91 |
| SO7E7060 | 2.54 | 0.97 |
| SO7E3851 | 2.95 | 0.97 |
| SO7E8293 | 3.96 | 0.97 |
| SO7E6309 | 11.79 | 0.99 |
| SO7E6191 | 16.99 | 0.99 |
| SO7E6466 | 1.8 | 1 |
| SO7E1003 | 3 | 1 |
| SO7E4680 | 3 | 1 |
| SO7E2070 | 4 | 1 |
| SO7E2170 | 9 | 1 |
| SO7E7587 | 6.2 | 1 |
| SO7E9120 | 16.5 | 1 |
| SO7E5052 | 19.5 | 1 |
| SO7E9117 | 34 | 1 |
| SO7E3417 | 35 | 1 |
| SO7E4810 | 37 | 1 |
| SO7E1042 | 42 | 1 |
| SO7E4610 | 46 | 1 |
| SO7E9114 | 46 | 1 |
| SO7E5010 | 50 | 1 |
| SO7E9119 | 50 | 1 |
| SO7E5210 | 52 | 1 |
| SO7E9141 | 52 | 1 |
| SO7E5310 | 53 | 1 |
| SO7E8519 | 0.58 | 1.02 |
| SO7E2731 | 1.77 | 1.01 |
| SO7E2867 | 2.99 | 1.02 |
| SO7E6153 | 4.32 | 1.02 |
| SO7E2940 | 4.57 | 1.02 |
| SO7E2435 | 5.08 | 1.02 |
| SO7E3699 | 7.19 | 1.02 |

| MFC NO. | I.D. | C.S. |
|---|---|---|
| SO7E4005 | 8.51 | 1.07 |
| SO7E6357 | 11.18 | 1.02 |
| SO7E6681 | 14.81 | 1.02 |
| SO7E7776 | 29.08 | 1.02 |
| SO7E2473 | 16.51 | 1.14 |
| SO7E6732 | 2.76 | 1.16 |
| SO7E8634 | 4.32 | 1.19 |
| SO7E6331 | 36.91 | 1.19 |
| SO7E6822 | 53 | 1.2 |
| SO7E5351 | 53.5 | 1.2 |
| SO7E6917 | 37 | 1.25 |
| SO7E6833 | 44.2 | 1.27 |
| SO7E8114 | 82.3 | 1.32 |
| SO7E1458 | 58 | 1.4 |
| SO7E0035 | 35 | 1.5 |
| SO7E3821 | 51.8 | 1.5 |
| SO7E0052 | 52 | 1.5 |
| SO7E0065 | 65 | 1.5 |
| SO7E0088 | 88 | 1.5 |
| SO7E9161 | 51.51 | 1.52 |
| SO7E9116 | 35.77 | 1.58 |
| SO7E2759 | 62.1 | 1.6 |
| SO7E9115 | 36.5 | 1.75 |
| SO7E3428 | 65 | 1.75 |
| SO7E8299 | 36 | 1.78 |
| SO7E2011 | 39.45 | 1.78 |
| SO7E2425 | 49.15 | 1.78 |
| SO7E8546 | 52.07 | 1.78 |
| SO7E6548 | 56.67 | 1.78 |
| SO7E6040 | 66.29 | 1.78 |
| SO7E4067 | 74.9 | 1.78 |
| SO7E4046 | 79 | 1.78 |
| SO7E9143 | 55.2 | 1.8 |
| SO7E2264 | 35.2 | 1.9 |
| SO7E3158 | 74.05 | 1.9 |
| SO7E3159 | 78 | 1.9 |
| SO7E9144 | 57.99 | 1.91 |
| SO7E9142 | 53.2 | 1.95 |
| SO7E8520 | 4.5 | 1.2 |
| SO7E2831 | 11.11 | 1.2 |
| SO7E1214 | 14 | 1.2 |
| SO7E9133 | 21.2 | 1.2 |
| SO7E5830 | 12.9 | 1.24 |
| SO7E3503 | 22 | 1.24 |
| SO7E7054 | 3.68 | 1.27 |
| SO7E6433 | 8.38 | 1.27 |
| SO7E8437 | 9.47 | 1.27 |
| SO7E6419 | 15.88 | 1.27 |
| SO7E6791 | 17.01 | 1.27 |

| MFC NO. | I.D. | C.S. |
|---|---|---|
| SO7E2479 | 7.95 | 1.29 |
| SO7E8649 | 2.8 | 1.3 |
| SO7E5513 | 5.5 | 1.3 |
| SO7E3648 | 5.79 | 1.3 |
| SO7E4030 | 6.07 | 1.3 |
| SO7E6670 | 20 | 1.3 |
| SO7E2513 | 25 | 1.3 |
| SO7E6128 | 6.71 | 1.4 |
| SO7E2023 | 9 | 1.4 |
| SO7E8325 | 7.75 | 1.42 |
| SO7E5831 | 15.49 | 1.47 |
| SO7E5896 | 1.19 | 1.5 |
| SO7E2352 | 2 | 1.5 |
| SO7E0003 | 3 | 1.5 |
| SO7E0005 | 5 | 1.5 |
| SO7E5515 | 5 | 1.5 |
| SO7E0006 | 6 | 1.5 |
| SO7E0007 | 7 | 1.5 |
| SO7E8573 | 8.81 | 1.5 |
| SO7E0009 | 9 | 1.5 |
| SO7E8672 | 10.57 | 1.5 |
| SO7E0011 | 11 | 1.5 |
| SO7E3298 | 12.5 | 1.5 |
| SO7E0013 | 13 | 1.5 |
| SO7E0014 | 14 | 1.5 |
| SO7E2493 | 14.5 | 1.5 |
| SO7E0015 | 15 | 1.5 |
| SO7E0016 | 16 | 1.5 |
| SO7E0017 | 17 | 1.5 |
| SO7E5901 | 16.5 | 1.5 |
| SO7E7573 | 19.51 | 1.5 |
| SO7E8574 | 19.99 | 1.5 |
| SO7E3508 | 20.2 | 1.5 |
| SO7E0022 | 22 | 1.5 |
| SO7E0023 | 23 | 1.5 |
| SO7E0025 | 25 | 1.5 |
| SO7E0033 | 33 | 1.5 |
| SO7E3829 | 24.84 | 1.52 |
| SO7E8187 | 14.35 | 1.52 |
| SO7E5048 | 14.61 | 1.52 |
| SO7E9122 | 14.62 | 1.52 |
| SO7E6124 | 253 | 1.53 |
| SO7E4138 | 18.08 | 1.57 |
| SO7E7352 | 21.46 | 1.57 |
| SO7E9113 | 15.1 | 1.6 |
| SO7E3471 | 18.1 | 1.6 |
| SO7E2332 | 19.1 | 1.6 |
| SO7E3738 | 27.5 | 1.7 |
| SO7E7998 | 15.37 | 1.73 |

| MFC NO. | I.D. | C.S. |
|---|---|---|
| SO7E3245 | 6.35 | 1.52 |
| SO7E5944 | 6.73 | 1.52 |
| SO7E6802 | 6.8 | 1.52 |
| SO7E3237 | 12.3 | 1.52 |
| SO7E3611 | 12.73 | 1.57 |
| SO7E3610 | 16.03 | 1.57 |
| SO7E2178 | 16.1 | 1.6 |
| SO7E2777 | 16.9 | 1.6 |
| SO7E8140 | 3.56 | 1.6 |
| SO7E3952 | 5.16 | 1.6 |
| SO7E6520 | 10.69 | 1.67 |
| SO7E4125 | 17.1 | 1.7 |
| SO7E1940 | 6.75 | 1.78 |
| SO7E8489 | 7.8 | 1.78 |
| SO7E8762 | 12.8 | 1.78 |
| SO7E6635 | 14.43 | 1.78 |
| SO7E5211 | 14.81 | 1.78 |
| SO7E3307 | 18.92 | 1.78 |
| SO7E5248 | 20.4 | 1.78 |
| SO7E3326 | 97.6 | 1.78 |
| SO7E7196 | 206.4 | 1.78 |
| SO7E7586 | 228.35 | 1.78 |
| SO7E7125 | 7.1 | 1.8 |
| SO7E6504 | 7.37 | 1.8 |
| SO7E4637 | 10.41 | 1.8 |
| SO7E2514 | 12.8 | 1.8 |
| SO7E2608 | 17 | 1.8 |
| SO7E6636 | 17.93 | 1.8 |
| SO7E3108 | 25.7 | 1.8 |
| SO7E6348 | 32.5 | 1.8 |
| SO7E2169 | 8.91 | 1.82 |
| SO7E6392 | 10.51 | 1.82 |
| SO7E6294 | 10.11 | 1.85 |
| SO7E9137 | 129.8 | 1.85 |
| SO7E7299 | 13.66 | 1.87 |
| SO7E3533 | 4.88 | 1.88 |
| SO7E8477 | 6.35 | 1.88 |
| SO7E6799 | 2.6 | 1.9 |
| SO7E7301 | 10.03 | 1.9 |
| SO7E2258 | 10.7 | 1.9 |
| SO7E2260 | 11 | 1.9 |
| SO7E9124 | 12.7 | 1.9 |
| SO7E6106 | 141.9 | 1.9 |
| SO7E6017 | 11.56 | 1.91 |
| SO7E9131 | 34.01 | 1.91 |
| SO7E7308 | 9.77 | 1.93 |
| SO7E8936 | 12.17 | 1.93 |
| SO7E6295 | 12.93 | 1.93 |
| SO7E6296 | 15.67 | 1.93 |
| SO7E6374 | 2.74 | 1.95 |
| SO7E7271 | 10.4 | 1.95 |

| MFC NO. | I.D. | C.S. |
|---|---|---|
| SO7E9128 | 23.5 | 1.98 |
| SO7E0103 | 3 | 2 |
| SO7E0104 | 4 | 2 |
| SO7E0105 | 5 | 2 |
| SO7E6373 | 5.1 | 2 |
| SO7E0106 | 6 | 2 |
| SO7E7347 | 6.7 | 2 |
| SO7E0107 | 7 | 2 |
| SO7E6378 | 7.5 | 2 |
| SO7E0108 | 8 | 2 |
| SO7E7643 | 8.3 | 2 |
| SO7E0109 | 9 | 2 |
| SO7E0110 | 10 | 2 |
| SO7E5900 | 10.01 | 2 |
| SO7E3553 | 10.5 | 2 |
| SO7E8087 | 10.7 | 2 |
| SO7E0111 | 11 | 2 |
| SO7E6393 | 11.88 | 2 |
| SO7E0112 | 12 | 2 |
| SO7E0114 | 14 | 2 |
| SO7E0115 | 15 | 2 |
| SO7E0116 | 16 | 2 |
| SO7E0117 | 17 | 2 |
| SO7E8707 | 17.5 | 2 |
| SO7E9118 | 20.8 | 2 |
| SO7E0123 | 23 | 2 |
| SO7E0125 | 25 | 2 |
| SO7E0128 | 28 | 2 |
| SO7E0129 | 29 | 2 |
| SO7E0130 | 30 | 2 |
| SO7E0131 | 31 | 2 |
| SO7E0132 | 32 | 2 |
| SO7E0138 | 38 | 2 |
| SO7E0140 | 40 | 2 |
| SO7E0148 | 48 | 2 |
| SO7E0150 | 50 | 2 |
| SO7E0153 | 53 | 2 |
| SO7E0154 | 54 | 2 |
| SO7E0156 | 56 | 2 |
| SO7E3242 | 57.78 | 2 |
| SO7E0158 | 58 | 2 |
| SO7E0159 | 59 | 2 |
| SO7E0160 | 60 | 2 |
| SO7E0161 | 61 | 2 |
| SO7E0164 | 64 | 2 |
| SO7E0165 | 65 | 2 |
| SO7E0174 | 74 | 2 |
| SO7E0175 | 75 | 2 |
| SO7E0178 | 78 | 2 |
| SO7E0180 | 80 | 2 |
| SO7E0182 | 82 | 2 |

| MFC NO. | I.D. | C.S. |
|---|---|---|
| SO7E6041 | 84.96 | 2 |
| SO7E0185 | 85 | 2 |
| SO7E0188 | 88 | 2 |
| SO7E0194 | 94 | 2 |
| SO7E0195 | 95 | 2 |
| SO7E0200 | 100 | 2 |
| SO7E5502 | 110 | 2 |
| SO7E6537 | 120 | 2 |
| SO7E8576 | 24.99 | 2.01 |
| SO7E7561 | 84.48 | 2.01 |
| SO7E7980 | 29.87 | 2.03 |
| SO7E7701 | 34.8 | 2.03 |
| SO7E7979 | 46.38 | 2.03 |
| SO7E6268 | 49.28 | 2.03 |
| SO7E8839 | 22.99 | 2.11 |
| SO7E2027 | 110 | 2.15 |
| SO7E3594 | 8.64 | 2.16 |
| SO7E4645 | 15.34 | 2.18 |
| SO7E4058 | 10 | 2.21 |
| SO7E2501 | 42.8 | 2.21 |
| SO7E6239 | 79.71 | 2.21 |
| SO7E2503 | 103.99 | 2.21 |
| SO7E6394 | 16.35 | 2.2 |
| SO7E8034 | 5.97 | 2.24 |
| SO7E2067 | 61.9 | 2.24 |
| SO7E8376 | 111.59 | 2.25 |
| SO7E2259 | 119.1 | 2.3 |
| SO7E2495 | 7.69 | 2.31 |
| SO7E7355 | 24.13 | 2.34 |
| SO7E7356 | 27.05 | 2.34 |
| SO7E7353 | 44.32 | 2.34 |
| SO7E8934 | 10.29 | 2.36 |
| SO7E5070 | 36.55 | 2.36 |
| SO7E8937 | 48.72 | 2.36 |
| SO7E7559 | 39.17 | 2.37 |
| SO7E2507 | 26 | 2.38 |
| SO7E2506 | 24.41 | 2.39 |
| SO7E2512 | 29.1 | 2.39 |
| SO7E3050 | 34.3 | 2.4 |
| SO7E5895 | 46.4 | 2.4 |
| SO7E4117 | 50.2 | 2.4 |
| SO7E4619 | 51.6 | 2.4 |
| SO7E2390 | 64.6 | 2.4 |
| SO7E7151 | 82.65 | 2.49 |
| SO7E9147 | 92.2 | 2.49 |
| SO7E0235 | 35 | 2.5 |
| SO7E0244 | 44 | 2.5 |
| SO7E0260 | 60 | 2.5 |
| SO7E0265 | 65 | 2.5 |
| SO7E2246 | 70.2 | 2.5 |
| SO7E5019 | 85.6 | 2.5 |

| MFC NO. | I.D. | C.S. |
|---|---|---|
| SO7E5038 | 56.8 | 2.54 |
| SO7E7981 | 85.06 | 2.54 |
| SO7E8931 | 40.01 | 2.62 |
| SO7E8928 | 65 | 2.62 |
| SO7E5092 | 80.2 | 2.62 |
| SO7E8933 | 85.75 | 2.62 |
| SO7E9146 | 86.87 | 2.62 |
| SO7E6926 | 92.71 | 2.62 |
| SO7E8837 | 49.09 | 2.74 |
| SO7E5882 | 54.2 | 2.82 |
| SO7E5213 | 58.42 | 2.92 |
| SO7E2965 | 2.5 | 2.4 |
| SO7E3466 | 5.6 | 2.4 |
| SO7E3014 | 6.3 | 2.4 |
| SO7E2335 | 7.3 | 2.4 |
| SO7E2157 | 8.3 | 2.4 |
| SO7E6259 | 8.6 | 2.4 |
| SO7E9121 | 9.6 | 2.4 |
| SO7E2353 | 11.3 | 2.4 |
| SO7E2047 | 13.3 | 2.4 |
| SO7E4116 | 15.2 | 2.4 |
| SO7E2279 | 15.7 | 2.4 |
| SO7E2595 | 16.3 | 2.4 |
| SO7E2069 | 17.3 | 2.4 |
| SO7E2394 | 19.3 | 2.4 |
| SO7E2549 | 22.3 | 2.4 |
| SO7E2262 | 27.5 | 2.4 |
| SO7E3835 | 29.6 | 2.4 |
| SO7E6154 | 21.4 | 2.4 |
| SO7E3953 | 23.8 | 2.4 |
| SO7E4154 | 24.2 | 2.4 |
| SO7E3836 | 31.6 | 2.4 |
| SO7E9134 | 181.04 | 2.4 |
| SO7E2530 | 181.4 | 2.4 |
| SO7E8943 | 17.04 | 2.41 |
| SO7E7706 | 7.5 | 2.45 |
| SO7E3411 | 5.09 | 2.49 |
| SO7E0205 | 5 | 2.5 |
| SO7E0206 | 6 | 2.5 |
| SO7E0207 | 7 | 2.5 |
| SO7E0208 | 8 | 2.5 |
| SO7E0210 | 10 | 2.5 |
| SO7E0211 | 11 | 2.5 |
| SO7E0212 | 12 | 2.5 |
| SO7E2882 | 12.5 | 2.5 |
| SO7E0213 | 13 | 2.5 |
| SO7E0214 | 14 | 2.5 |
| SO7E0215 | 15 | 2.5 |
| SO7E0216 | 16 | 2.5 |
| SO7E0217 | 17 | 2.5 |
| SO7E0218 | 18 | 2.5 |

| MFC NO. | I.D. | C.S. |
|---|---|---|
| SO7E0219 | 19 | 2.5 |
| SO7E0120 | 20 | 2.5 |
| SO7E0223 | 23 | 2.5 |
| SO7E0225 | 25 | 2.5 |
| SO7E0226 | 26 | 2.5 |
| SO7E0229 | 29 | 2.5 |
| SO7E0230 | 30 | 2.5 |
| SO7E0232 | 32 | 2.5 |
| SO7E0304 | 104 | 2.5 |
| SO7E0305 | 105 | 2.5 |
| SO7E0311 | 110 | 2.5 |
| SO7E6809 | 111 | 2.5 |
| SO7E6261 | 27.19 | 2.51 |
| SO7E7009 | 23.4 | 2.6 |
| SO7E7296 | 10.79 | 2.61 |
| SO7E7297 | 12.06 | 2.61 |
| SO7E4050 | 11.18 | 2.62 |
| SO7E6915 | 14.4 | 2.62 |
| SO7E8435 | 141.6 | 2.62 |
| SO7E6031 | 19.99 | 2.62 |
| SO7E8927 | 24.77 | 2.62 |
| SO7E8935 | 25.78 | 2.62 |
| SO7E8930 | 31.67 | 2.62 |
| SO7E5236 | 147.51 | 2.62 |
| SO7E8684 | 200.4 | 2.62 |
| SO7E6883 | 17.96 | 2.64 |
| SO7E6043 | 115.82 | 2.64 |
| SO7E8955 | 2.69 | 2.65 |
| SO7E2483 | 20.59 | 2.69 |
| SO7E2520 | 28.5 | 2.69 |
| SO7E2511 | 30.99 | 2.69 |
| SO7E7825 | 8 | 2.7 |
| SO7E7010 | 22 | 2.7 |
| SO7E6174 | 215.65 | 2.74 |
| SO7E4048 | 18.08 | 2.77 |
| SO7E6641 | 6.35 | 2.79 |
| SO7E8426 | 8.62 | 2.84 |
| SO7E3597 | 15 | 2.9 |
| SO7E3598 | 9.4 | 2.9 |
| SO7E2477 | 20.98 | 2.99 |
| SO7E0359 | 9 | 3 |
| SO7E0360 | 10 | 3 |
| SO7E0362 | 12 | 3 |
| SO7E0363 | 13 | 3 |
| SO7E0364 | 14 | 3 |
| SO7E0365 | 15 | 3 |
| SO7E0366 | 16 | 3 |
| SO7E0367 | 17 | 3 |
| SO7E0368 | 18 | 3 |
| SO7E0369 | 19 | 3 |
| SO7E0370 | 20 | 3 |

| MFC NO. | I.D. | C.S. |
|---|---|---|
| SO7E2054 | 20.2 | 3 |
| SO7E0372 | 22 | 3 |
| SO7E2572 | 22.2 | 3 |
| SO7E0374 | 24 | 3 |
| SO7E2683 | 24.3 | 3 |
| SO7E0375 | 25 | 3 |
| SO7E0376 | 26 | 3 |
| SO7E2050 | 26.2 | 3 |
| SO7E6395 | 26.61 | 3 |
| SO7E0377 | 27 | 3 |
| SO7E0378 | 28 | 3 |
| SO7E0380 | 30 | 3 |
| SO7E2164 | 30.2 | 3 |
| SO7E0383 | 33 | 3 |
| SO7E0384 | 34 | 3 |
| SO7E0385 | 35 | 3 |
| SO7E0386 | 36 | 3 |
| SO7E6396 | 37.46 | 3 |
| SO7E0388 | 38 | 3 |
| SO7E0389 | 39 | 3 |
| SO7E1955 | 40.2 | 3 |
| SO7E0391 | 41 | 3 |
| SO7E0392 | 42 | 3 |
| SO7E2779 | 42.5 | 3 |
| SO7E0398 | 48 | 3 |
| SO7E6269 | 49.01 | 3 |
| SO7E9138 | 49.5 | 3 |
| SO7E0404 | 54 | 3 |
| SO7E0413 | 63 | 3 |
| SO7E6114 | 71.88 | 3 |
| SO7E6172 | 75.95 | 3 |
| SO7E0431 | 81 | 3 |
| SO7E0433 | 83 | 3 |
| SO7E0438 | 88 | 3 |
| SO7E0458 | 108 | 3 |
| SO7E0544 | 194 | 3 |
| SO7E6105 | 197.49 | 3 |
| SO7E6171 | 242.32 | 3 |
| SO7E4156 | 260.99 | 3 |
| SO7E6818 | 14.48 | 3.1 |
| SO7E6891 | 30.4 | 3.1 |
| SO7E6310 | 62.4 | 3.1 |
| SO7E7585 | 85.34 | 3.1 |
| SO7E3301 | 30.5 | 3.15 |
| SO7E5133 | 27.99 | 3.16 |
| SO7E6134 | 5.54 | 3.18 |
| SO7E2417 | 117.48 | 3.18 |
| SO7E2525 | 21.48 | 3.2 |
| SO7E9132 | 21.49 | 3.2 |
| SO7E6718 | 25.5 | 3.2 |
| SO7E4636 | 138.6 | 3.4 |

| MFC NO. | I.D. | C.S. |
|---|---|---|
| SO7E6039 | 208.92 | 3.4 |
| SO7E9127 | 7.58 | 3.45 |
| SO7E8436 | 206.88 | 3.45 |
| SO7E7168 | 133.6 | 3.48 |
| SO7E0735 | 135 | 3.5 |
| SO7E0761 | 161 | 3.5 |
| SO7E8942 | 204.9 | 3.53 |
| SO7E8091 | 333.35 | 3.53 |
| SO7E9135 | 135.73 | 3.54 |
| SO7E2634 | 186.5 | 3.55 |
| SO7E5014 | 9.6 | 3.7 |
| SO7E8490 | 354 | 3.8 |
| SO7E7915 | 361.6 | 3.8 |
| SO7E5091 | 144.02 | 3.91 |
| SO7E7109 | 145.16 | 3.96 |
| SO7E5955 | 45.72 | 3.45 |
| SO7E0649 | 49 | 3.5 |
| SO7E6180 | 51.2 | 3.5 |
| SO7E0659 | 59 | 3.5 |
| SO7E3569 | 67.99 | 3.5 |
| SO7E2573 | 41.28 | 3.53 |
| SO7E2149 | 49.19 | 3.53 |
| SO7E3324 | 59.18 | 3.53 |
| SO7E4677 | 79.63 | 3.53 |
| SO7E8035 | 86.87 | 3.53 |
| SO7E6008 | 89.66 | 3.53 |
| SO7E8462 | 93.26 | 3.53 |
| SO7E8098 | 93.57 | 3.53 |
| SO7E4678 | 82.42 | 3.56 |
| SO7E7311 | 64.72 | 3.61 |
| SO7E9130 | 47.29 | 3.76 |
| SO7E7889 | 87.71 | 3.99 |
| SO7E5288 | 8 | 4 |
| SO7E1059 | 19 | 4 |
| SO7E1062 | 22 | 4 |
| SO7E1068 | 28 | 4 |
| SO7E1075 | 35 | 4 |
| SO7E1077 | 37 | 4 |
| SO7E1078 | 38 | 4 |
| SO7E1081 | 41 | 4 |
| SO7E1084 | 44 | 4 |
| SO7E1085 | 45 | 4 |
| SO7E1086 | 46 | 4 |
| SO7E9139 | 47.45 | 4 |
| SO7E1102 | 62 | 4 |
| SO7E1105 | 65 | 4 |
| SO7E2459 | 93.8 | 4 |
| SO7E1135 | 95 | 4 |
| SO7E1154 | 114 | 4 |
| SO7E1168 | 128 | 4 |
| SO7E1178 | 138 | 4 |
| SO7E1208 | 168 | 4 |

| MFC NO. | I.D. | C.S. |
|---|---|---|
| SO7E1212 | 172 | 4 |
| SO7E1430 | 390 | 4 |
| SO7E3877 | 10.21 | 4.01 |
| SO7E6462 | 43.26 | 4.19 |
| SO7E2460 | 76.46 | 4.2 |
| SO7E2234 | 76 | 4.25 |
| SO7E1996 | 117.1 | 4.39 |
| SO7E2997 | 27 | 4.5 |
| SO7E6927 | 50 | 4.5 |
| SO7E3281 | 118 | 4.5 |
| SO7E3556 | 208 | 4.5 |
| SO7E2449 | 122.8 | 4.6 |
| SO7E1941 | 160 | 4.75 |
| SO7E8375 | 109.5 | 4.75 |
| SO7E6541 | 20.62 | 4.78 |
| SO7E2450 | 102 | 4.95 |
| SO7E1565 | 25 | 5 |
| SO7E1595 | 55 | 5 |
| SO7E1630 | 90 | 5 |
| SO7E1649 | 109 | 5 |
| SO7E9136 | 130 | 5 |
| SO7E1795 | 255 | 5 |
| SO7E4079 | 530 | 5 |
| SO7E2065 | 66.04 | 5.08 |
| SO7E3752 | 246.56 | 5.38 |
| SO7E3201 | 25.65 | 5.51 |
| SO7E5276 | 50.15 | 5.59 |
| SO7E2003 | 96.6 | 6 |
| SO7E3706 | 201 | 6 |
| SO7E1961 | 215 | 6 |
| SO7E9129 | 251 | 6 |
| SO7E2458 | 69 | 6.3 |
| SO7E6857 | 31.75 | 6.35 |
| SO7E2183 | 49 | 6.5 |
| SO7E2517 | 1.9 | 6.8 |
| SO7E2200 | 37.47 | 6.99 |
| SO7E6052 | 37.5 | 6.99 |
| SO7E5081 | 94.62 | 6.99 |
| SO7E6729 | 101 | 7 |
| SO7E9145 | 66.04 | 7.62 |
| SO7E7653 | 18.26 | 7.75 |
| SO7E2127 | 66.04 | 7.87 |
| SO7E7146 | 74 | 8 |
| SO7E2160 | 130 | 8 |
| SO7E2052 | 212 | 8 |
| SO7E7057 | 393 | 8.6 |
| SO7E7056 | 308 | 9.3 |
| SO7E2039 | 66.24 | 9.53 |
| SO7E9125 | 23.8 | 10.8 |
| SO7E5902 | 320.67 | 12.7 |
| SO7E2518 | 1.9 | 14.8 |
| SO7E2526 | 1.98 | 23.5 |

# JAPANESE STANDARD P. SERIES

| MFC NO. | JIS NO. | I.D. | ± | C.S. | ± |
|---|---|---|---|---|---|
| S07P0030 | P3 | 2.8 | 0.12 | 1.9 | 0.07 |
| S07P0040 | P4 | 3.8 | | | |
| S07P0050 | P5 | 4.8 | | | |
| S07P0060 | P6 | 5.8 | | | |
| S07P0070 | P7 | 6.8 | | | |
| S07P0080 | P8 | 7.8 | | | |
| S07P0090 | P9 | 8.8 | | | |
| S07P0100 | P10 | 9.8 | | | |
| S07P010A | P10A | 9.8 | | 2.4 | |
| S07P0110 | P11 | 10.8 | | | |
| S07P0112 | P11.2 | 11.0 | | | |
| S07P0120 | P12 | 11.8 | | | |
| S07P0125 | P12.5 | 12.3 | | | |
| S07P0140 | P14 | 13.8 | | | |
| S07P0150 | P15 | 14.8 | | | |
| S07P0160 | P16 | 15.8 | | | |
| S07P0180 | P18 | 17.8 | | | |
| S07P0200 | P20 | 19.8 | 0.15 | | |
| S07P0210 | P21 | 20.8 | | | |
| S07P0220 | P22 | 21.8 | | | |
| S07P022A | P22A | 21.7 | | 3.5 | 0.10 |
| S07P0224 | P22.4 | 22.1 | | | |
| S07P0240 | P24 | 23.7 | | | |
| S07P0250 | P25 | 24.7 | | | |
| S07P0255 | P25.5 | 25.2 | | | |
| S07P0260 | P26 | 25.7 | | | |
| S07P0280 | P28 | 27.7 | | | |
| S07P0290 | P29 | 28.7 | | | |
| S07P0295 | P29.5 | 29.2 | | | |
| S07P0300 | P30 | 29.7 | | | |
| S07P0310 | P31 | 30.7 | | | |
| S07P0315 | P31.5 | 31.2 | | | |
| S07P0320 | P32 | 31.7 | | | |
| S07P0340 | P34 | 33.7 | | | |
| S07P0350 | P35 | 34.7 | | | |
| S07P0355 | P35.5 | 35.2 | | | |
| S07P0360 | P36 | 35.7 | | | |
| S07P0380 | P38 | 37.7 | | | |
| S07P0390 | P39 | 38.7 | | | |
| S07P0400 | P40 | 39.7 | | | |
| S07P0410 | P41 | 40.7 | 0.25 | | |
| S07P0420 | P42 | 41.7 | | | |
| S07P0440 | P44 | 43.7 | | | |
| S07P0450 | P45 | 44.7 | | | |
| S07P0460 | P46 | 45.7 | | | |
| S07P0480 | P48 | 47.7 | | | |
| S07P0490 | P49 | 48.7 | | | |
| S07P0500 | P50 | 49.7 | | | |
| S07P048A | P48A | 47.6 | | 5.7 | 0.15 |
| S07P050A | P50A | 49.6 | | | |
| S07P0520 | P52 | 51.6 | | | |
| S07P0530 | P53 | 52.6 | | | |
| S07P0550 | P55 | 54.6 | | | |
| S07P0560 | P56 | 55.6 | | | |
| S07P0580 | P58 | 57.6 | | | |
| S07P0600 | P60 | 59.6 | | | |
| S07P0620 | P62 | 61.6 | | | |
| S07P0630 | P63 | 62.6 | | | |
| S07P0650 | P65 | 64.6 | | | |
| S07P0670 | P67 | 66.6 | | | |
| S07P0700 | P70 | 69.6 | | | |

| MFC NO. | JIS NO. | I.D. | ± | C.S. | ± |
|---|---|---|---|---|---|
| S07P0710 | P71 | 70.6 | 0.4 | 5.7 | 0.15 |
| S07P0750 | P75 | 74.6 | | | |
| S07P0800 | P80 | 79.6 | | | |
| S07P0850 | P85 | 84.6 | | | |
| S07P0900 | P90 | 89.6 | | | |
| S07P0950 | P95 | 94.6 | | | |
| S07P1000 | P100 | 99.6 | | | |
| S07P1020 | P102 | 101.6 | | | |
| S07P1050 | P105 | 104.6 | | | |
| S07P1100 | P110 | 109.6 | | | |
| S07P1120 | P112 | 111.6 | | | |
| S07P1150 | P115 | 114.6 | | | |
| S07P1200 | P120 | 119.6 | | | |
| S07P1250 | P125 | 124.6 | | | |
| S07P1300 | P130 | 129.6 | 0.6 | | |
| S07P1320 | P132 | 131.6 | | | |
| S07P1350 | P135 | 134.6 | | | |
| S07P1400 | P140 | 139.6 | | | |
| S07P1450 | P145 | 144.6 | | | |
| S07P1500 | P150 | 149.6 | | | |
| S07P150A | P150A | 149.5 | | 8.4 | |
| S07P1550 | P155 | 154.5 | | | |
| S07P1600 | P160 | 159.5 | | | |
| S07P1650 | P165 | 164.4 | | | |
| S07P1700 | P170 | 169.5 | | | |
| S07P1750 | P175 | 174.5 | | | |
| S07P1800 | P180 | 179.5 | | | |
| S07P1850 | P185 | 184.5 | 0.8 | | |
| S07P1900 | P190 | 189.5 | | | |
| S07P1950 | P195 | 194.5 | | | |
| S07P2000 | P200 | 199.5 | | | |
| S07P2050 | P205 | 204.5 | | | |
| S07P2090 | P209 | 208.5 | | | |
| S07P2100 | P210 | 209.5 | | | |
| S07P2150 | P215 | 214.5 | | | |
| S07P2200 | P220 | 219.5 | | | |
| S07P2250 | P225 | 224.5 | | | |
| S07P2300 | P230 | 229.5 | | | |
| S07P2350 | P235 | 234.5 | | | |
| S07P2400 | P240 | 239.5 | | | |
| S07P2450 | P245 | 244.5 | | | |
| S07P2500 | P250 | 249.5 | | | |
| S07P2550 | P255 | 254.5 | | | |
| S07P2600 | P260 | 259.5 | | | |
| S07P2650 | P265 | 264.5 | | | |
| S07P2700 | P270 | 269.5 | | | |
| S07P2750 | P275 | 274.5 | | | |
| S07P2800 | P280 | 279.5 | | | |
| S07P2850 | P285 | 284.5 | | | |
| S07P2900 | P290 | 289.5 | | | |
| S07P2950 | P295 | 294.5 | | | |
| S07P3000 | P300 | 299.5 | | | |
| 607P3150 | P315 | 314.5 | 1.0 | | |
| S07P3200 | P320 | 319.5 | | | |
| S07P3350 | P335 | 334.5 | | | |
| S07P3400 | P340 | 339.5 | | | |
| S07P3550 | P355 | 354.5 | | | |
| S07P3600 | P360 | 359.5 | | | |
| S07P3750 | P375 | 374.5 | | | |
| S07P3850 | P385 | 384.5 | | | |
| S07P4000 | P400 | 399.5 | | | |

# V.S. SERIES

| MFC NO. | JIS NO. | I.D. | ± | C.S. | ± |
|---|---|---|---|---|---|
| S0V0150 | V15 | 14.5 | | 4 | |
| S07V0240 | V24 | 23.5 | | 4 | |
| S07V0340 | V34 | 33.5 | | 4 | |
| S07V0400 | V40 | 39.5 | | 4 | |
| S07V0550 | V55 | 54.5 | | 4 | |
| S07V0700 | V70 | 69 | | 4 | |
| S07V0850 | V85 | 84 | | 4 | |
| S07V1000 | V100 | 99 | | 4 | |
| S07V1055 | V1055 | 1044 | | 10 | |
| S07V1200 | V120 | 119 | | 4 | |
| S07V1500 | V150 | 148.5 | | 4 | |
| S07V1750 | V175 | 173 | | 4 | |
| S07V2250 | V225 | 222.5 | | 6 | |
| S07V2750 | V275 | 272 | | 6 | |
| S07V3250 | V325 | 321.5 | | 6 | |
| S07V3800 | V380 | 376 | | 6 | |
| S07V4300 | V430 | 425.5 | | 6 | |
| S07V4800 | V480 | 475 | | 10 | |
| S07V5300 | V530 | 524.5 | | 10 | |
| S07V5850 | V585 | 579 | | 10 | |
| S07V6400 | V640 | 633.5 | | 10 | |
| S07V6900 | V690 | 683 | | 10 | |
| S07V7400 | V740 | 732.5 | | 10 | |
| S07V7900 | V790 | 782 | | 10 | |
| S07V8450 | V845 | 836.5 | | 10 | |
| S07V9500 | V950 | 940.5 | | 10 | |
| S07S0030 | S3 | 2.5 | | 1.5 | |
| S07S0040 | S4 | 3.5 | | 1.5 | |
| S07S0044 | | | | | |
| S07S0050 | | 4.5 | | 1.5 | |
| S07S0060 | S6 | 5.5 | | 1.5 | |
| S07S0070 | | 6.5 | | 1.5 | |
| S07S0080 | S8 | 7.5 | | 1.5 | |
| S07S0090 | S9 | 8.5 | | 1.5 | |
| S07S0100 | S10 | 9.5 | | 1.5 | |
| S07S0112 | S11.2 | 10.7 | | 1.5 | |
| S07S0120 | S12 | 11.5 | | 1.5 | |
| S07S0125 | S12.5 | 12 | | 1.5 | |
| S07S0140 | S14 | 13.5 | | 1.5 | |
| S07S0160 | S16 | 15.5 | | 1.5 | |
| S07S0180 | | 17.5 | | 1.5 | |
| S07S0200 | S20 | 19.5 | | 1.5 | |
| S07S0220 | S22 | 21.5 | | 1.5 | |
| S07S0224 | S22.4 | 21.5 | | 2 | |
| S07S0240 | S24 | 23.5 | | 2 | |
| S07S0250 | S25 | 24.5 | | 2 | |

| MFC NO. | JIS NO. | I.D. | ± | C.S. | ± |
|---|---|---|---|---|---|
| S07S0260 | S26 | 25.5 | | 2 | |
| S07S0280 | S28 | 27.5 | | 2 | |
| S07S0290 | S29 | 28.5 | | 2 | |
| S07S0300 | S30 | 29.5 | | 2 | |
| S07S0315 | S31.5 | 31 | | 2 | |
| S07S0320 | S32 | 31.5 | | 2 | |
| S07S0340 | S34 | 33.5 | | 2 | |
| S07S0350 | S35 | 34.5 | | 2 | |
| S07S0355 | S35.5 | 35 | | 2 | |
| S07S0360 | S36 | 35.5 | | 2 | |
| S07S0380 | S38 | 37.5 | | 2 | |
| S07S0400 | S40 | 39.5 | | 2 | |
| S07S0420 | S42 | 41.5 | | 2 | |
| S07S0440 | S44 | 43.5 | | 2 | |
| S07S0450 | S45 | 44.5 | | 2 | |
| S07S0460 | S46 | 45.5 | | 2 | |
| S07S0480 | S48 | 47.5 | | 2 | |
| S07S0500 | S50 | 49.5 | | 2 | |
| S07S0530 | S53 | 52.5 | | 2 | |
| S07S0550 | S55 | 54.5 | | 2 | |
| S07S0560 | S56 | 55.5 | | 2 | |
| S07S0600 | S60 | 59.5 | | 2 | |
| S07S0630 | S63 | 62.5 | | 2 | |
| S07S0650 | S65 | 64.5 | | 2 | |
| S07S0670 | S67 | 66.5 | | 2 | |
| S07S0700 | S70 | 69.5 | | 2 | |
| S07S0710 | S71 | 70.5 | | 2 | |
| S07S0750 | S75 | 74.5 | | 2 | |
| S07S0800 | S80 | 79.5 | | 2 | |
| S07S0850 | S85 | 84.5 | | 2 | |
| S07S0900 | S90 | 89.5 | | 2 | |
| S07S0950 | S95 | 94.5 | | 2 | |
| S07S1000 | S100 | 99.5 | | 2 | |
| S07S1050 | S105 | 104.5 | | 2 | |
| S07S1100 | S110 | 109.5 | | 2 | |
| S07S1120 | S112 | 111.5 | | 2 | |
| S07S1150 | S115 | 114.5 | | 2 | |
| S07S1200 | S120 | 119.5 | | 2 | |
| S07S1250 | S125 | 124.5 | | 2 | |
| S07S1300 | S130 | 129.5 | | 2 | |
| S07S1320 | S132 | 131.5 | | 2 | |
| S07S1350 | S135 | 134.5 | | 2 | |
| S07S1400 | S140 | 139.5 | | 2 | |
| S07S1450 | S145 | 144.5 | | 2 | |
| S07S1500 | S150 | 149.5 | | 2 | |

## G. SERIES

| MFC NO. | JIS NO. | I.D. | ± | C.S. | ± |
|---|---|---|---|---|---|
| S07G0250 | G25 | 24.4 | | | |
| S07G0300 | G30 | 29.4 | 0.15 | | |
| S07G0350 | G35 | 34.4 | | | |
| S07G0400 | G40 | 39.4 | | | |
| S07G0450 | G45 | 44.4 | | | |
| S07G0500 | G50 | 49.4 | | | |
| S07G0550 | G55 | 54.4 | 0.25 | | |
| S07G0600 | G60 | 59.4 | | | |
| S07G0650 | G65 | 64.4 | | | |
| S07G0700 | G70 | 69.4 | | | |
| S07G0750 | G75 | 74.4 | | | |
| S07G0800 | G80 | 79.4 | | | |
| S07G0850 | G85 | 84.4 | | 3.1 | 0.10 |
| S07G0900 | G90 | 89.4 | | | |
| S07G0950 | G95 | 94.4 | | | |
| S07G1000 | G100 | 99.4 | 0.4 | | |
| S07G1050 | G105 | 104.4 | | | |
| S07G1100 | G110 | 109.4 | | | |
| S07G1150 | G115 | 114.4 | | | |
| S07G1200 | G120 | 119.4 | | | |
| S07G1250 | G125 | 124.4 | | | |
| S07G1300 | G130 | 129.4 | | | |
| S07G1350 | G135 | 134.4 | | | |
| S07G1400 | G140 | 139.4 | | | |
| S07G1450 | G145 | 144.4 | | | |
| S07G1500 | G150 | 149.3 | | | |
| S07G1550 | G155 | 154.3 | 0.6 | | |
| S07G1600 | G160 | 159.3 | | | |
| S07G1650 | G165 | 164.3 | | | |
| S07G1700 | G170 | 169.3 | | | |
| S07G1750 | G175 | 174.3 | | | |
| S07G1800 | G180 | 179.3 | | | |
| S07G1850 | G185 | 184.3 | | | |
| S07G1900 | G190 | 189.3 | | | |
| S07G1950 | G195 | 194.3 | | | |
| S07G2000 | G200 | 199.3 | | 5.7 | 0.15 |
| S07G2100 | G210 | 209.3 | | | |
| S07G2200 | G220 | 219.3 | | | |
| S07G2300 | G230 | 229.3 | 0.8 | | |
| S07G2400 | G240 | 239.3 | | | |
| S07G2500 | G250 | 249.3 | | | |
| S07G2600 | G260 | 259.3 | | | |
| S07G2700 | G270 | 269.3 | | | |
| S07G2800 | G280 | 279.3 | | | |
| S07G2900 | G290 | 289.3 | | | |
| S07G3000 | G300 | 299.3 | | | |

We would like to introduce to you our practical and convenient O-Ring kits. You will find that we supply kits that come in metric, inch, and the Japanese JIS P.G.S.V. standard. In addition, you also have a variety of materials to choose from. Just look through the different kits that we will be introducing to you, you will surely find one that you need.

# KIT A

## Special Features:

1) Grey container with transparent lid, along with reference chart for easy size identification.
2) Container designed for easy O-Ring pick out from individual compartment.
3) Each kit packed by individual carton.
4) Measurement:10.000"x7.750"x1.250"

## Kit A O-Ring Sizes:

### MFC NO. ORKA01

Standard European Metric Series (mm)
3x1.5, 5x1.5, 7x1.5, 9x1.5, 11x1.5, 6x2, 8x2, 10x2, 12x2, 14x2, 6.3x2.4, 8.3x2.4, 11.3x2.4, 13.3x2.4, 17.3x2.4, 5x2.5, 7x2.5, 10x2.5, 12x2.5, 15x2.5, 10x3, 12x3, 14x3, 16x3, 18x3, 20.2x3, 22.2x3, 24.2x3, 26.2x3, 30.2x3

### MFC NO. ORKA02

AS568 Standard Series (in.)
006, 007, 008, 009, 010, 011, 012, 013, 014, 015, 016, 017, 018, 110,111, 112, 113, 114, 115, 116, 117, 118, 119, 210, 211, 212, 213, 214,215, 216
Total 30 items (435 pcs.)

# KIT C

## Special Features:

1) Container available in various colors: red, light blue, orange, and yellow.
2) Sturdy ABS container and hinges for lasting use.
3) Built in size identification along each storing section.
4) Reference chart inside the cover for easy size identification.
5) Storing hole can be used as O.D. gauge.
6) Built in O-Ring cross-section gauge.
7) Each kit packed by individual carton.
8) Measurement: 9.375"x6.875"x1.750"

## Kit C O-Ring Sizes:

### MFC NO. ORKC01

Standard European Metric Series (mm)
3x2, 4x2, 5x2, 6x2, 7x2, 8x2, 10x2, 10x2.5, 11x2.5, 12x2.5, 14x2.5, 16x2.5, 17x2.5, 19x2.5, 19x3, 20x3, 22x3, 24x3, 25x3, 27x3, 28x3, 30x3, 32x3, 33x3, 35x3, 36x3, 38x3,38x4, 41x4, 44x4

### MFC NO. ORKC02

AS568 Standard Series (in.)
006, 007, 008, 009, 010, 011, 012, 110, 111, 112, 113, 114, 115, 116, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 325, 326, 327
Total 30 items (382 pcs.)

### MFC NO. ORKC03

JIS Standard Series (mm)
2.8x1.9, 3.8x1.9, 4.8x1.9, 5.8x1.9, 6.8x1.9, 7.8x1.9, 8.8x1.9, 9.8x2.4, 10.8x2.4, 11.8x2.4, 13.8x2.4, 15.8x2.4, 17.8x2.4, 19.8x2.4, 20.0x3.0, 22.0x3.0, 22.1x3.5, 24.4x3.1, 24.7x3.5, 25.7x3.5, 29.4x3.1, 29.7x3.5, 31.7x3.5, 33.7x3.5, 34.4x3.1, 35.7x3.5, 39.4x3.1, 39.7x3.5, 44.7x3.1, 47.7x3.5
Total 30 items (396 pcs.)

## KIT E

### Special Features:

1) Light blue container with reference chart on the inside of the cover.
2) Container designed for easy O-Ring pick out from individual compartment.
3) Each kit packed by individual carton.
4) Measurement: 12.500"x8.125"x1.437"

### Kit E O-Ring Sizes:

#### MFC NO. ORKE02

AS568 Standard Series (in)
006, 007, 008, 009, 010, 011, 012, 013, 014, 015, 016, 017, 018, 110,111, 112, 113, 114, 115, 116, 117, 118, 119, 210, 211, 212, 213, 214,215, 216
Total 30 items (340 pcs.)

## KIT G

### Special Features:

1) Practical circular holes for easy storing organization.
2) Size indentification at each allotment.
3) Each kit packed by individual carton.
4) Measurement: 10.875"x6.375"x1.625"

#### MFC NO. ORKG02

AS568 Standard Series (in)
006,008, 010, 011, 012, 014, 110, 111, 112, 113, 114, 115, 116, 117, 118, 210, 211, 212, 213, 214, 215, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226
Total 32 items (407 pcs.)

## SPLICING KIT

#### MFC NO. SPCI

**Features:**

1) One meter length of cord in each of five A.S. cross sections:0.070, 0.103, 0.139, 0.210, and 0.275
2) All cord in 70 durometer Buna-N.
3) Step by step instructions.
4) Razor blade, cutting and splicing jig, and one tube of quick drying cement.
5) Replacement cord readily available.
6) Sturdy case comes with mailing carton.

#### MFC NO. SPC2

1) One meter length of cord in each of nine metric cross sections: 1.5mm, 2.0mm, 2.5mm, 3.0mm, 3.5mm, 4.0mm, 5.0mm, 5.7mm, and 8.4mm.
2) All cord in 70 durometer Buna-N.
3) Step by step instructions.
4) Razor blade, cutting and splicing jig, and one tube of quick drying cement.
5) Replacement cord readily availabie.
6) Sturdy case comes with mailing carton.

# BACK-UP RING S08A

## AS568 STANDARD SERIES

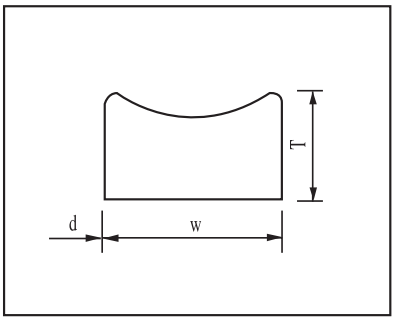


| AS-568 NO. | M DIA. | TOL. ± | R ±0.010 | T (REF.) | A | TOL. ± | W | TOL. ± |
|---|---|---|---|---|---|---|---|---|
| 006 | .140 | .005 | .047 | .049 | .005 | .003 | .053 | .003 |
| 007 | .171 | | | | | | | |
| 008 | .202 | | | | | | | |
| 009 | .234 | | | | | | | |
| 010 | .265 | | | | | | | |
| 011 | .327 | | | | | | | |
| 012 | .390 | | | | | | | |
| 013 | .455 | | | | | | | |
| 014 | .518 | | | | | | | |
| 015 | .580 | | | | | | | |
| 016 | .643 | | | | | | | |
| 017 | .705 | | | | | | | |
| 018 | .768 | | | | | | | |
| 019 | .830 | .005 | | | | | | |
| 020 | .893 | .006 | | | | | | |
| 021 | .955 | | | | | | | |
| 022 | 1.018 | | | | | | | |
| 023 | 1.080 | | | | | | | |
| 024 | 1.143 | | | | | | | |
| 025 | 1.205 | | | | | | | |
| 026 | 1.268 | | | | | | | |
| 027 | 1.330 | | | | | | | |
| 028 | 1.393 | .006 | | | | | | |
| 029 | 1.518 | .010 | | | | | | |
| 030 | 1.643 | | | | | | | |
| 031 | 1.768 | | | | | | | |
| 032 | 1.893 | | | | | | | |
| 033 | 2.018 | | | | | | | |
| 034 | 2.143 | | | | | | | |
| 035 | 2.268 | | | | | | | |
| 036 | 2.393 | | | | | | | |
| 037 | 2.518 | | | | | | | |
| 038 | 2.643 | .010 | | | | | | |
| 039 | 2.768 | .015 | | | | | | |
| 040 | 2.893 | | | | | | | |
| 041 | 3.018 | | | | | | | |
| 042 | 3.268 | | | | | | | |
| 043 | 3.518 | | | | | | | |
| 044 | 3.768 | | | | | | | |
| 045 | 4.018 | | | | | | | |
| 046 | 4.268 | | | | | | | |
| 047 | 4.518 | | | | | | | |
| 048 | 4.768 | .015 | | | | | | |
| 049 | 5.018 | .023 | | | | | | |
| 050 | 5.268 | .023 | 0.87 | .049 | | | .053 | |
| 110 | .390 | .005 | .129 | .053 | | | .086 | |
| 111 | .452 | | | | | | | |
| 112 | .515 | | | | | | | |
| 113 | .577 | | | | | | | |
| 114 | .640 | | | | | | | |
| 115 | .702 | | | | | | | |
| 116 | .765 | .005 | | | | | | |
| 117 | .831 | .006 | | | | | | |
| 118 | .893 | | | | | | | |
| 119 | .956 | | | | | | | |
| 120 | 1.018 | | | | | | | |
| 121 | 1.081 | | | | | | | |
| 122 | 1.143 | | | | | | | |
| 123 | 1.206 | | | | | | | |
| 124 | 1.268 | | | | | | | |
| 125 | 1.331 | | | | | | | |
| 126 | 1.393 | | | | | | | |
| 127 | 1.456 | | | | | | | |
| 128 | 1.518 | .006 | | | | | | |
| 129 | 1.581 | .010 | | | | | | |
| 130 | 1.643 | | | | | | | |
| 131 | 1.706 | | | | | | | |
| 132 | 1.768 | | | | | | | |
| 133 | 1.831 | | | | | | | |
| 134 | 1.893 | | | | | | | |
| 135 | 1.956 | | | | | | | |
| 136 | 2.018 | | | | | | | |
| 137 | 2.081 | | | | | | | |
| 138 | 2.143 | | | | | | | |
| 139 | 2.206 | | | | | | | |
| 140 | 2.268 | | | | | | | |
| 141 | 2.331 | | | | | | | |
| 142 | 2.393 | | | | | | | |
| 143 | 2.456 | | | | | | | |
| 144 | 2.518 | | | | | | | |
| 145 | 2.581 | | | | | | | |
| 146 | 2.643 | .010 | .129 | .053 | .045 | .005 | .086 | .003 |

| AS-568 NO. | M DIA. | TOL. ± | R ±0.010 | T (REF.) | A | TOL. ± | W | TOL. ± |
|---|---|---|---|---|---|---|---|---|
| 147 | 2.706 | .015 | .129 | .053 | .045 | .003 | .086 | .003 |
| 148 | 2.768 | | | | | | | |
| 149 | 2.831 | | | | | | | |
| 150 | 2.893 | | | | | | | |
| 151 | 3.018 | | | | | | | |
| 152 | 3.268 | | | | | | | |
| 153 | 3.518 | | | | | | | |
| 154 | 3.708 | | | | | | | |
| 155 | 4.018 | | | | | | | |
| 156 | 4.268 | | | | | | | |
| 157 | 4.518 | | | | | | | |
| 158 | 4.768 | | | | | | | |
| 159 | 5.018 | .015 | | | | | | |
| 160 | 5.268 | .023 | | | | | | |
| 161 | 5.518 | | | | | | | |
| 162 | 5.768 | | | | | | | |
| 163 | 6.018 | | | | | | | |
| 164 | 6.268 | | | | | | | |
| 165 | 6.518 | | | | | | | |
| 166 | 6.768 | | | | | | | |
| 167 | 7.018 | .023 | | | | | | |
| 168 | 7.268 | .030 | | | | | | |
| 169 | 7.518 | | | | | | | |
| 170 | 7.768 | | | | | | | |
| 171 | 8.018 | | | | | | | |
| 172 | 8.268 | | | | | | | |
| 173 | 8.518 | | | | | | | |
| 174 | 8.768 | | | | | | | |
| 175 | 9.018 | | | | | | | |
| 176 | 9.268 | | | | | | | |
| 177 | 9.518 | | | | | | | |
| 178 | 9.768 | .030 | .129 | .053 | .045 | | .086 | .003 |
| 210 | .766 | .006 | .174 | .050 | .040 | | .118 | .004 |
| 211 | .828 | | | | | | | |
| 212 | .891 | | | | | | | |
| 213 | .953 | | | | | | | |
| 214 | 1.016 | | | | | | | |
| 215 | 1.078 | | | | | | | |
| 216 | 1.141 | | | | | | | |
| 217 | 1.203 | | | | | | | |
| 218 | 1.266 | | | | | | | |
| 219 | 1.334 | | | | | | | |
| 220 | 1.397 | | | | | | | |
| 221 | 1.459 | | | | | | | |
| 222 | 1.522 | .006 | | | | | | |
| 223 | 1.647 | .010 | | | | | | |
| 224 | 1.772 | | | | | | | |
| 225 | 1.897 | | | | | | | |
| 226 | 2.022 | | | | | | | |
| 227 | 2.147 | | | | | | | |
| 228 | 2.272 | | | | | | | |
| 229 | 2.397 | | | | | | | |
| 230 | 2.522 | | | | | | | |
| 231 | 2.631 | .010 | | | | | | |
| 232 | 2.756 | .015 | | | | | | |
| 233 | 2.881 | | | | | | | |
| 234 | 3.006 | | | | | | | |
| 235 | 3.131 | | | | | | | |
| 236 | 3.256 | | | | | | | |
| 237 | 3.381 | | | | | | | |
| 238 | 3.506 | | | | | | | |
| 239 | 3.631 | | | | | | | |
| 240 | 3.756 | | | | | | | |
| 241 | 3.881 | | | | | | | |
| 242 | 4.006 | | | | | | | |
| 243 | 4.131 | | | | | | | |
| 244 | 4.256 | | | | | | | |
| 245 | 4.381 | | | | | | | |
| 246 | 4.506 | | | | | | | |
| 247 | 4.631 | | | | | | | |
| 248 | 4.768 | | | | | | | |
| 249 | 4.893 | | | | | | | |
| 250 | 5.018 | .015 | | | | | | |
| 251 | 5.143 | .023 | | | | | | |
| 252 | 5.268 | | | | | | | |
| 253 | 5.393 | | | | | | | |
| 254 | 5.518 | | | | | | | |
| 255 | 5.643 | | | | | | | |
| 256 | 5.768 | | | | | | | |
| 257 | 5.893 | | | | | | | |
| 258 | 6.018 | | | | | | | |
| 259 | 6.268 | | | | | | | |
| 260 | 6.518 | .023 | .174 | .050 | .040 | .003 | .118 | .004 |

| AS-568 NO. | M DIA. | TOL. ± | R ±0.010 | T (REF.) | A | TOL. ± | W | TOL. ± |
|---|---|---|---|---|---|---|---|---|
| 261 | 6.768 | .023 | .174 | .050 | .040 | .003 | .118 | .004 |
| 262 | 7.018 | .023 | | | | | | |
| 263 | 7.268 | .030 | | | | | | |
| 264 | 7.518 | | | | | | | |
| 265 | 7.768 | | | | | | | |
| 266 | 8.018 | | | | | | | |
| 267 | 8.268 | | | | | | | |
| 268 | 8.518 | | | | | | | |
| 269 | 8.768 | | | | | | | |
| 270 | 9.018 | | | | | | | |
| 271 | 9.268 | | | | | | | |
| 272 | 9.518 | | | | | | | |
| 273 | 9.768 | | | | | | | |
| 274 | 10.018 | | | | | | | |
| 275 | 10.518 | | | | | | | |
| 276 | 11.018 | | | | | | | |
| 277 | 11.518 | | | | | | | |
| 278 | 12.018 | | | | | | | |
| 279 | 13.018 | | | | | | | |
| 280 | 14.018 | | | | | | | |
| 281 | 15.018 | 0.30 | .174 | .050 | .040 | .003 | .118 | .040 |
| 325 | 1.513 | .010 | .262 | .076 | .060 | .004 | .183 | .005 |
| 326 | 1.638 | | | | | | | |
| 327 | 1.763 | | | | | | | |
| 328 | 1.888 | | | | | | | |
| 329 | 2.013 | | | | | | | |
| 330 | 2.138 | | | | | | | |
| 331 | 2.268 | | | | | | | |
| 332 | 2.393 | | | | | | | |
| 333 | 2.518 | | | | | | | |
| 334 | 2.643 | .010 | | | | | | |
| 335 | 2.768 | .015 | | | | | | |
| 336 | 2.893 | | | | | | | |
| 337 | 3.018 | | | | | | | |
| 338 | 3.143 | | | | | | | |
| 339 | 3.273 | | | | | | | |
| 340 | 3.398 | | | | | | | |
| 341 | 3.523 | | | | | | | |
| 342 | 3.648 | | | | | | | |
| 343 | 3.773 | | | | | | | |
| 344 | 3.898 | | | | | | | |
| 345 | 4.028 | | | | | | | |
| 346 | 4.153 | | | | | | | |
| 347 | 4.278 | | | | | | | |
| 348 | 4.403 | | | | | | | |
| 349 | 4.528 | | .262 | .076 | .060 | .004 | .183 | .005 |
| 425 | 4.551 | | .344 | .117 | .096 | .005 | .236 | .006 |
| 426 | 4.676 | | | | | | | |
| 427 | 4.801 | | | | | | | |
| 428 | 4.926 | | | | | | | |
| 429 | 5.051 | | | | | | | |
| 430 | 5.176 | .023 | | | | | | |
| 431 | 5.301 | | | | | | | |
| 432 | 5.426 | | | | | | | |
| 433 | 5.551 | | | | | | | |
| 434 | 5.676 | | | | | | | |
| 435 | 5.801 | | | | | | | |
| 436 | 5.926 | | | | | | | |
| 437 | 6.051 | | | | | | | |
| 438 | 6.274 | | | | | | | |
| 439 | 6.524 | | | | | | | |
| 440 | 6.774 | | | | | | | |
| 441 | 7.024 | 0.23 | | | | | | |
| 442 | 7.274 | .030 | | | | | | |
| 443 | 7.524 | | | | | | | |
| 444 | 7.774 | | | | | | | |
| 445 | 8.024 | | | | | | | |
| 446 | 8.524 | | | | | | | |
| 447 | 9.024 | | | | | | | |
| 448 | 9.524 | | | | | | | |
| 449 | 10.024 | | | | | | | |
| 450 | 10.524 | | | | | | | |
| 451 | 11.024 | | | | | | | |
| 452 | 11.524 | | | | | | | |
| 453 | 12.024 | | | | | | | |
| 454 | 12.524 | | | | | | | |
| 455 | 13.024 | | | | | | | |
| 456 | 13.524 | | | | | | | |
| 457 | 14.024 | | | | | | | |
| 458 | 14.524 | | | | | | | |
| 459 | 15.024 | | | | | | | |
| 460 | 15.524 | .030 | .344 | .117 | .096 | .005 | .236 | .006 |

# MFC Mission Statements

Our Vision :

- Become a world-class sealing component supplier.
- Continue quality improvement.
- Create a first class brand.
- Promote a reasonable, computerized and systematic working environment.
- Maximize profit sharing with shareholders, employees and customers.
- Become public listing for growing operation.

Our Strategy :

- Prioritize employee education and maintain the best possible staff.
- Seek total customer satisfaction.
- Expand product offerings and develop high value-added products.
- Expand market share.
- Promote e-commerce.
- Actively seek to increase profitability through mergers, joint ventures and alliances.

Our Value :

- Our most valuable assets are our satisfied customers and our efficient staff.
- Apply a global view in our daily operation to fulfill our obligations to the society and environment.