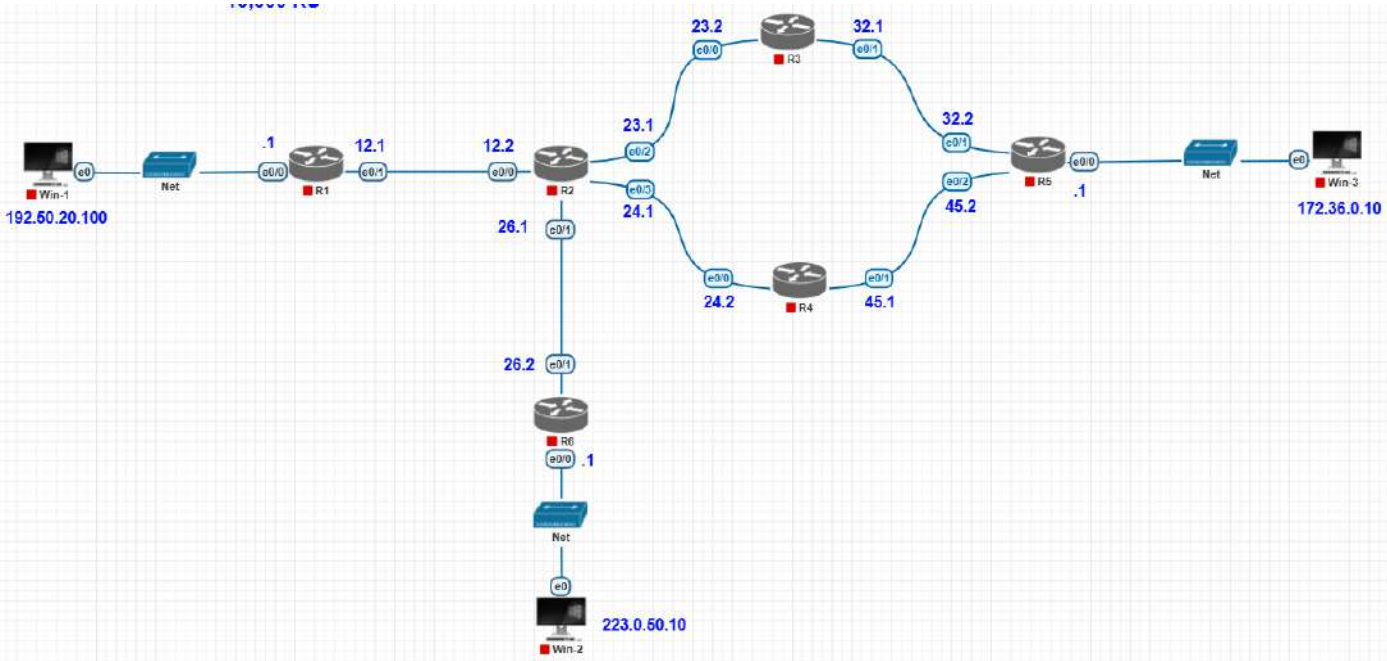
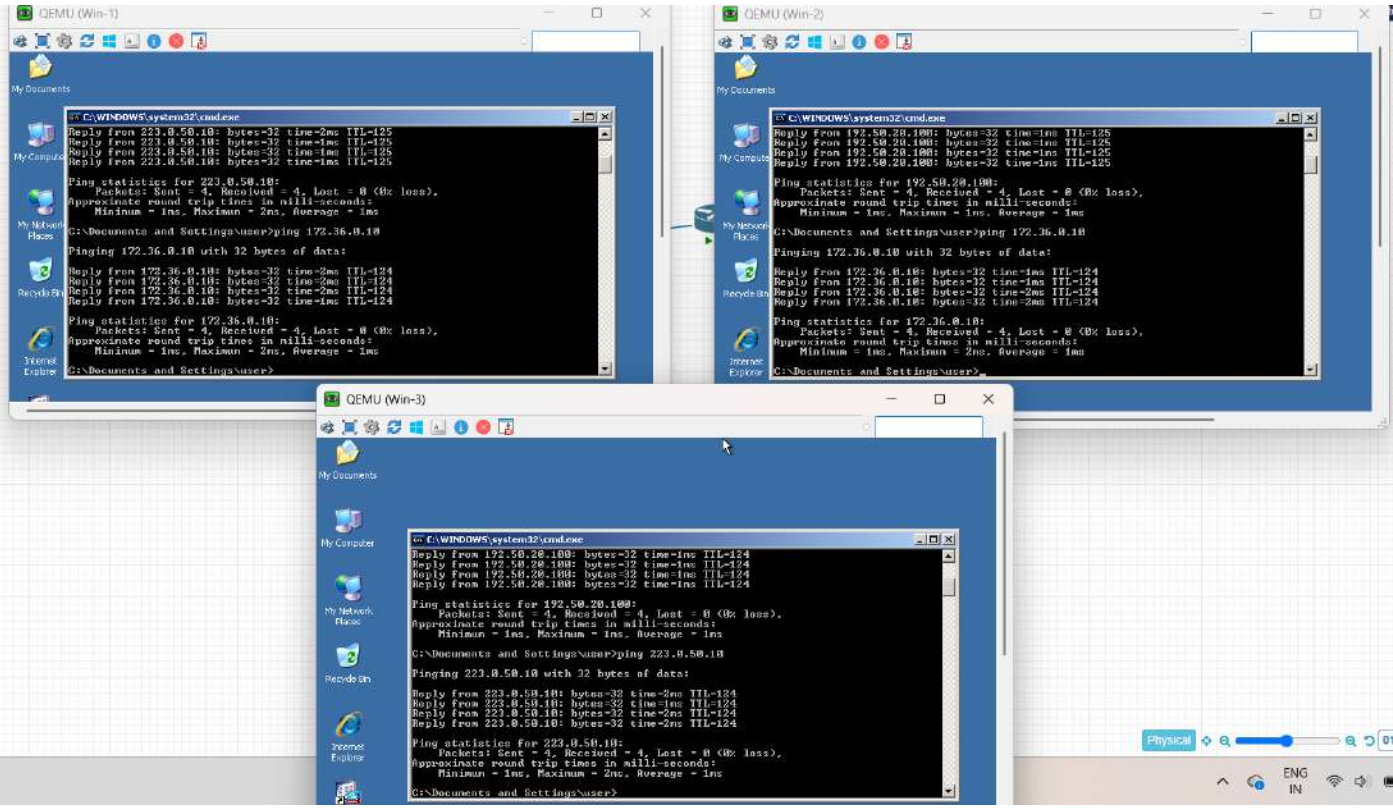
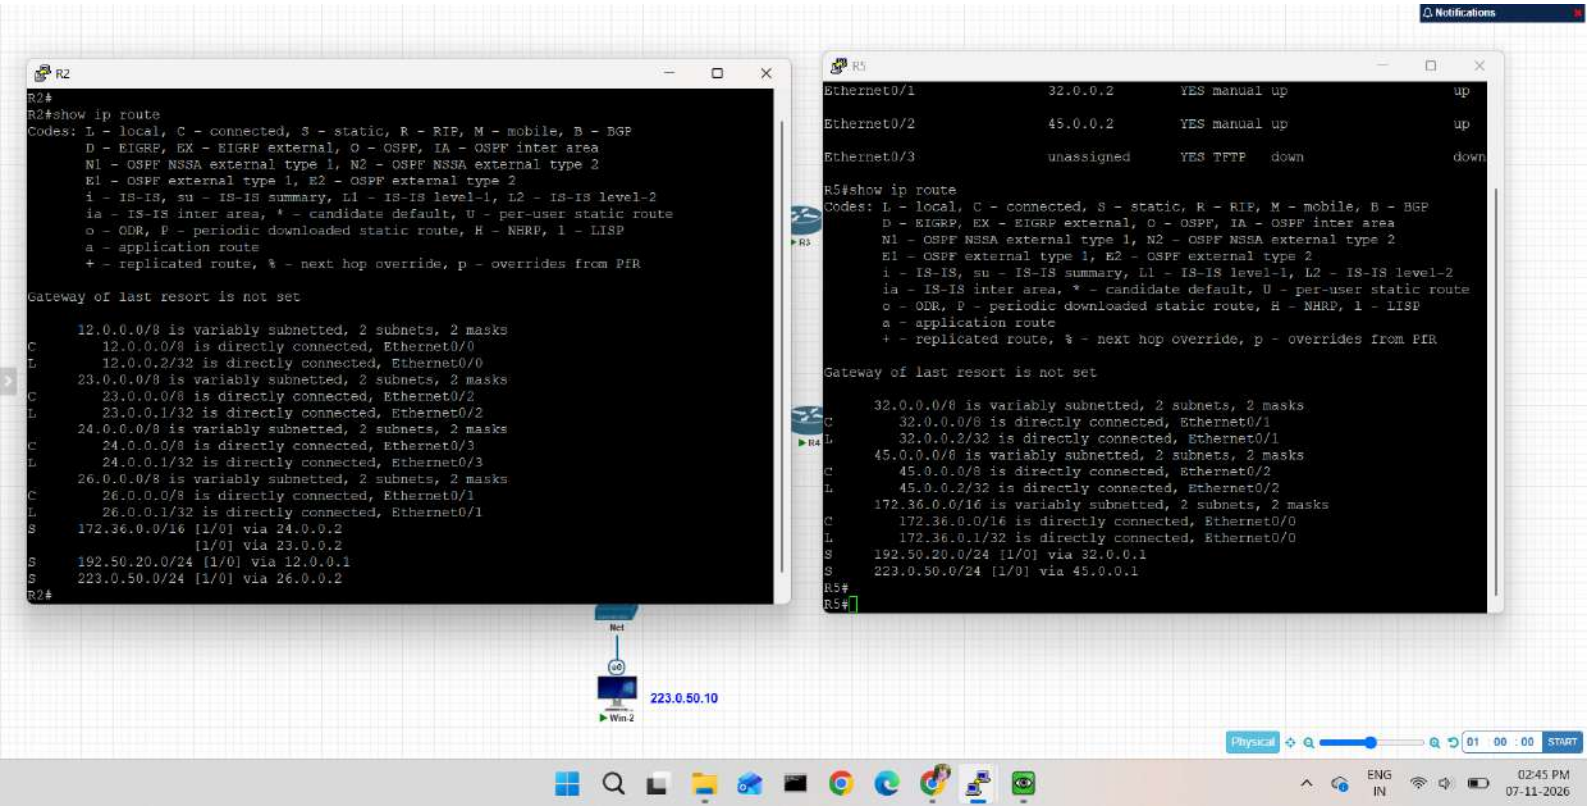

Win-1
192.50.20.100
e0
Net
.1
e0/0
R1
12.1
e0/1
12.2
e0/0
R2
23.1
e0/2
23.2
e0/0
R3
32.1
e0/1
32.2
e0/1
R5
e0/0
.1
Net
e0
Win-3
172.36.0.10
e0/3
24.1
e0/2
45.2
e0/0
24.2
R4
e0/1
45.1
26.1
e0/1
26.2
e0/1
R6
e0/0
.1
Net
e0
Win-2
223.0.50.10


QEMU (Win-1)
C:\WINDOWS\system32\cmd.exe
Reply from 223.0.50.10: bytes=32 time=2ms TTL=125
Reply from 223.0.50.10: bytes=32 time=1ms TTL=125
Reply from 223.0.50.10: bytes=32 time=1ms TTL=125
Reply from 223.0.50.10: bytes=32 time=1ms TTL=125
Ping statistics for 223.0.50.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 2ms, Average = 1ms
C:\Documents and Settings\user>ping 172.36.0.10
Pinging 172.36.0.10 with 32 bytes of data:
Reply from 172.36.0.10: bytes=32 time=2ms TTL=124
Reply from 172.36.0.10: bytes=32 time=2ms TTL=124
Reply from 172.36.0.10: bytes=32 time=2ms TTL=124
Reply from 172.36.0.10: bytes=32 time=1ms TTL=124
Ping statistics for 172.36.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 2ms, Average = 1ms
C:\Documents and Settings\user>
QEMU (Win-2)
C:\WINDOWS\system32\cmd.exe
Reply from 192.50.20.100: bytes=32 time=1ms TTL=125
Reply from 192.50.20.100: bytes=32 time=1ms TTL=125
Reply from 192.50.20.100: bytes=32 time=1ms TTL=125
Reply from 192.50.20.100: bytes=32 time=1ms TTL=125
Ping statistics for 192.50.20.100:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 1ms, Average = 1ms
C:\Documents and Settings\user>ping 172.36.0.10
Pinging 172.36.0.10 with 32 bytes of data:
Reply from 172.36.0.10: bytes=32 time=1ms TTL=124
Reply from 172.36.0.10: bytes=32 time=1ms TTL=124
Reply from 172.36.0.10: bytes=32 time=2ms TTL=124
Reply from 172.36.0.10: bytes=32 time=2ms TTL=124
Ping statistics for 172.36.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 2ms, Average = 1ms
C:\Documents and Settings\user>
QEMU (Win-3)
C:\WINDOWS\system32\cmd.exe
Reply from 192.50.20.100: bytes=32 time=1ms TTL=124
Reply from 192.50.20.100: bytes=32 time=1ms TTL=124
Reply from 192.50.20.100: bytes=32 time=1ms TTL=124
Reply from 192.50.20.100: bytes=32 time=1ms TTL=124
Ping statistics for 192.50.20.100:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 1ms, Average = 1ms
C:\Documents and Settings\user>ping 223.0.50.10
Pinging 223.0.50.10 with 32 bytes of data:
Reply from 223.0.50.10: bytes=32 time=2ms TTL=124
Reply from 223.0.50.10: bytes=32 time=1ms TTL=124
Reply from 223.0.50.10: bytes=32 time=2ms TTL=124
Reply from 223.0.50.10: bytes=32 time=2ms TTL=124
Ping statistics for 223.0.50.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 2ms, Average = 1ms
C:\Documents and Settings\user>
My Documents
My Computer
My Network Places
Recycle Bin
Internet Explorer
Physical
START
ENG
IN
02:43 PM
07-11-2026


R2
R2#
R2#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR
Gateway of last resort is not set
12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 12.0.0.0/8 is directly connected, Ethernet0/0
L 12.0.0.2/32 is directly connected, Ethernet0/0
23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 23.0.0.0/8 is directly connected, Ethernet0/2
L 23.0.0.1/32 is directly connected, Ethernet0/2
24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 24.0.0.0/8 is directly connected, Ethernet0/3
L 24.0.0.1/32 is directly connected, Ethernet0/3
26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 26.0.0.0/8 is directly connected, Ethernet0/1
L 26.0.0.1/32 is directly connected, Ethernet0/1
S 172.36.0.0/16 [1/0] via 24.0.0.2
[1/0] via 23.0.0.2
S 192.50.20.0/24 [1/0] via 12.0.0.1
S 223.0.50.0/24 [1/0] via 26.0.0.2
R2#
R5
Ethernet0/1 32.0.0.2 YES manual up up
Ethernet0/2 45.0.0.2 YES manual up up
Ethernet0/3 unassigned YES TFTP down down
R5#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR
Gateway of last resort is not set
32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 32.0.0.0/8 is directly connected, Ethernet0/1
L 32.0.0.2/32 is directly connected, Ethernet0/1
45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 45.0.0.0/8 is directly connected, Ethernet0/2
L 45.0.0.2/32 is directly connected, Ethernet0/2
172.36.0.0/16 is variably subnetted, 2 subnets, 2 masks
C 172.36.0.0/16 is directly connected, Ethernet0/0
L 172.36.0.1/32 is directly connected, Ethernet0/0
S 192.50.20.0/24 [1/0] via 32.0.0.1
S 223.0.50.0/24 [1/0] via 45.0.0.1
R5#
R5#
R5
R4
Net
Win-2
223.0.50.10
Notifications
Physical
01 00 : 00
START
ENG
IN
02:45 PM
07-11-2026