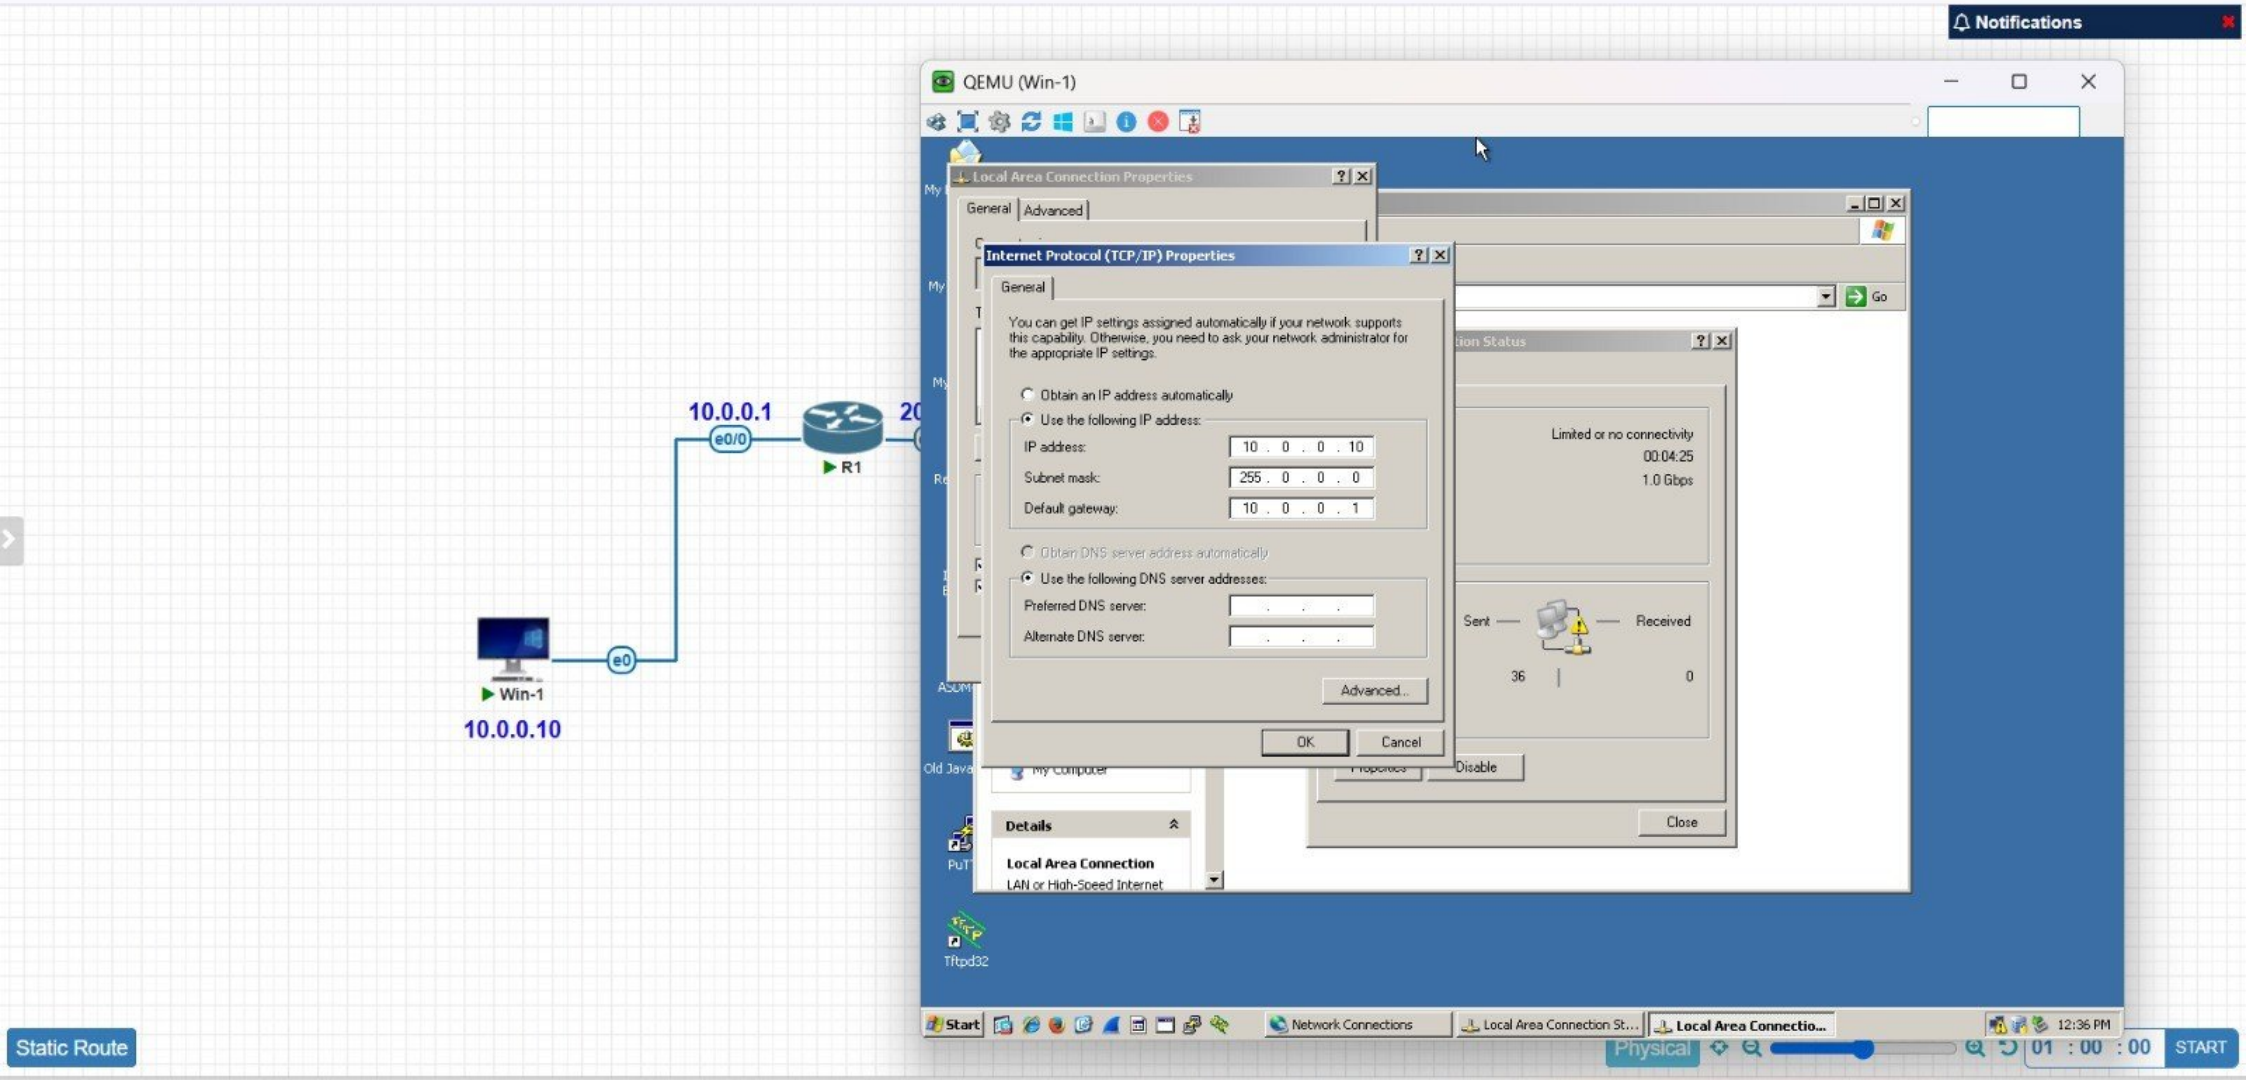

Notifications
QEMU (Win-1)
Local Area Connection Properties
General
Advanced
Internet Protocol (TCP/IP) Properties
General
You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.
Obtain an IP address automatically
Use the following IP address:
IP address: 10 . 0 . 0 . 10
Subnet mask: 255 . 0 . 0 . 0
Default gateway: 10 . 0 . 0 . 1
Obtain DNS server address automatically
Use the following DNS server addresses:
Preferred DNS server:
Alternate DNS server:
Advanced...
OK
Cancel
Limited or no connectivity
00:04:25
1.0 Gbps
Sent
Received
36
0
Disable
Close
Details
Local Area Connection
LAN or High-Speed Internet
Tftpd32
Start
Network Connections
Local Area Connection St...
Local Area Connectio...
12:36 PM
10.0.0.1
e0/0
R1
e0
Win-1
10.0.0.10
Static Route
Physical
01 : 00 : 00
START

PNETLab | Topology

Ask Gemini

labs.surennetwork.com/legacy/topology

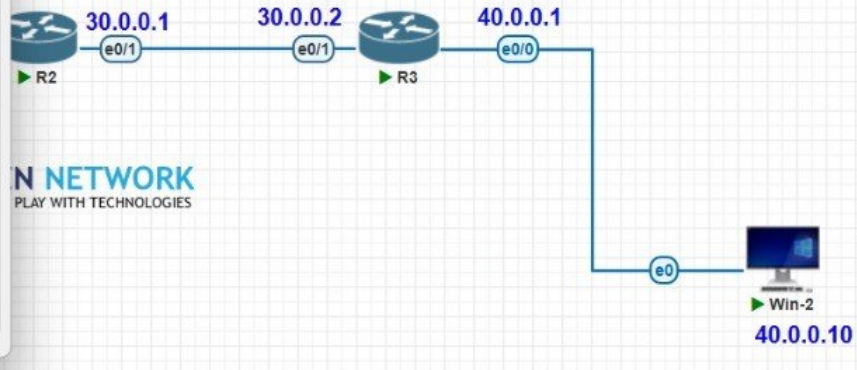
R1

```
Ethernet0/3                unassigned      YES TFTP   down                  down

R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

      10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        10.0.0.0/8 is directly connected, Ethernet0/0
L        10.0.0.1/32 is directly connected, Ethernet0/0
      20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        20.0.0.0/8 is directly connected, Ethernet0/1
L        20.0.0.1/32 is directly connected, Ethernet0/1
S     30.0.0.0/8 [1/0] via 20.0.0.2
S     40.0.0.0/8 [1/0] via 20.0.0.2
R1#
```



Static Route

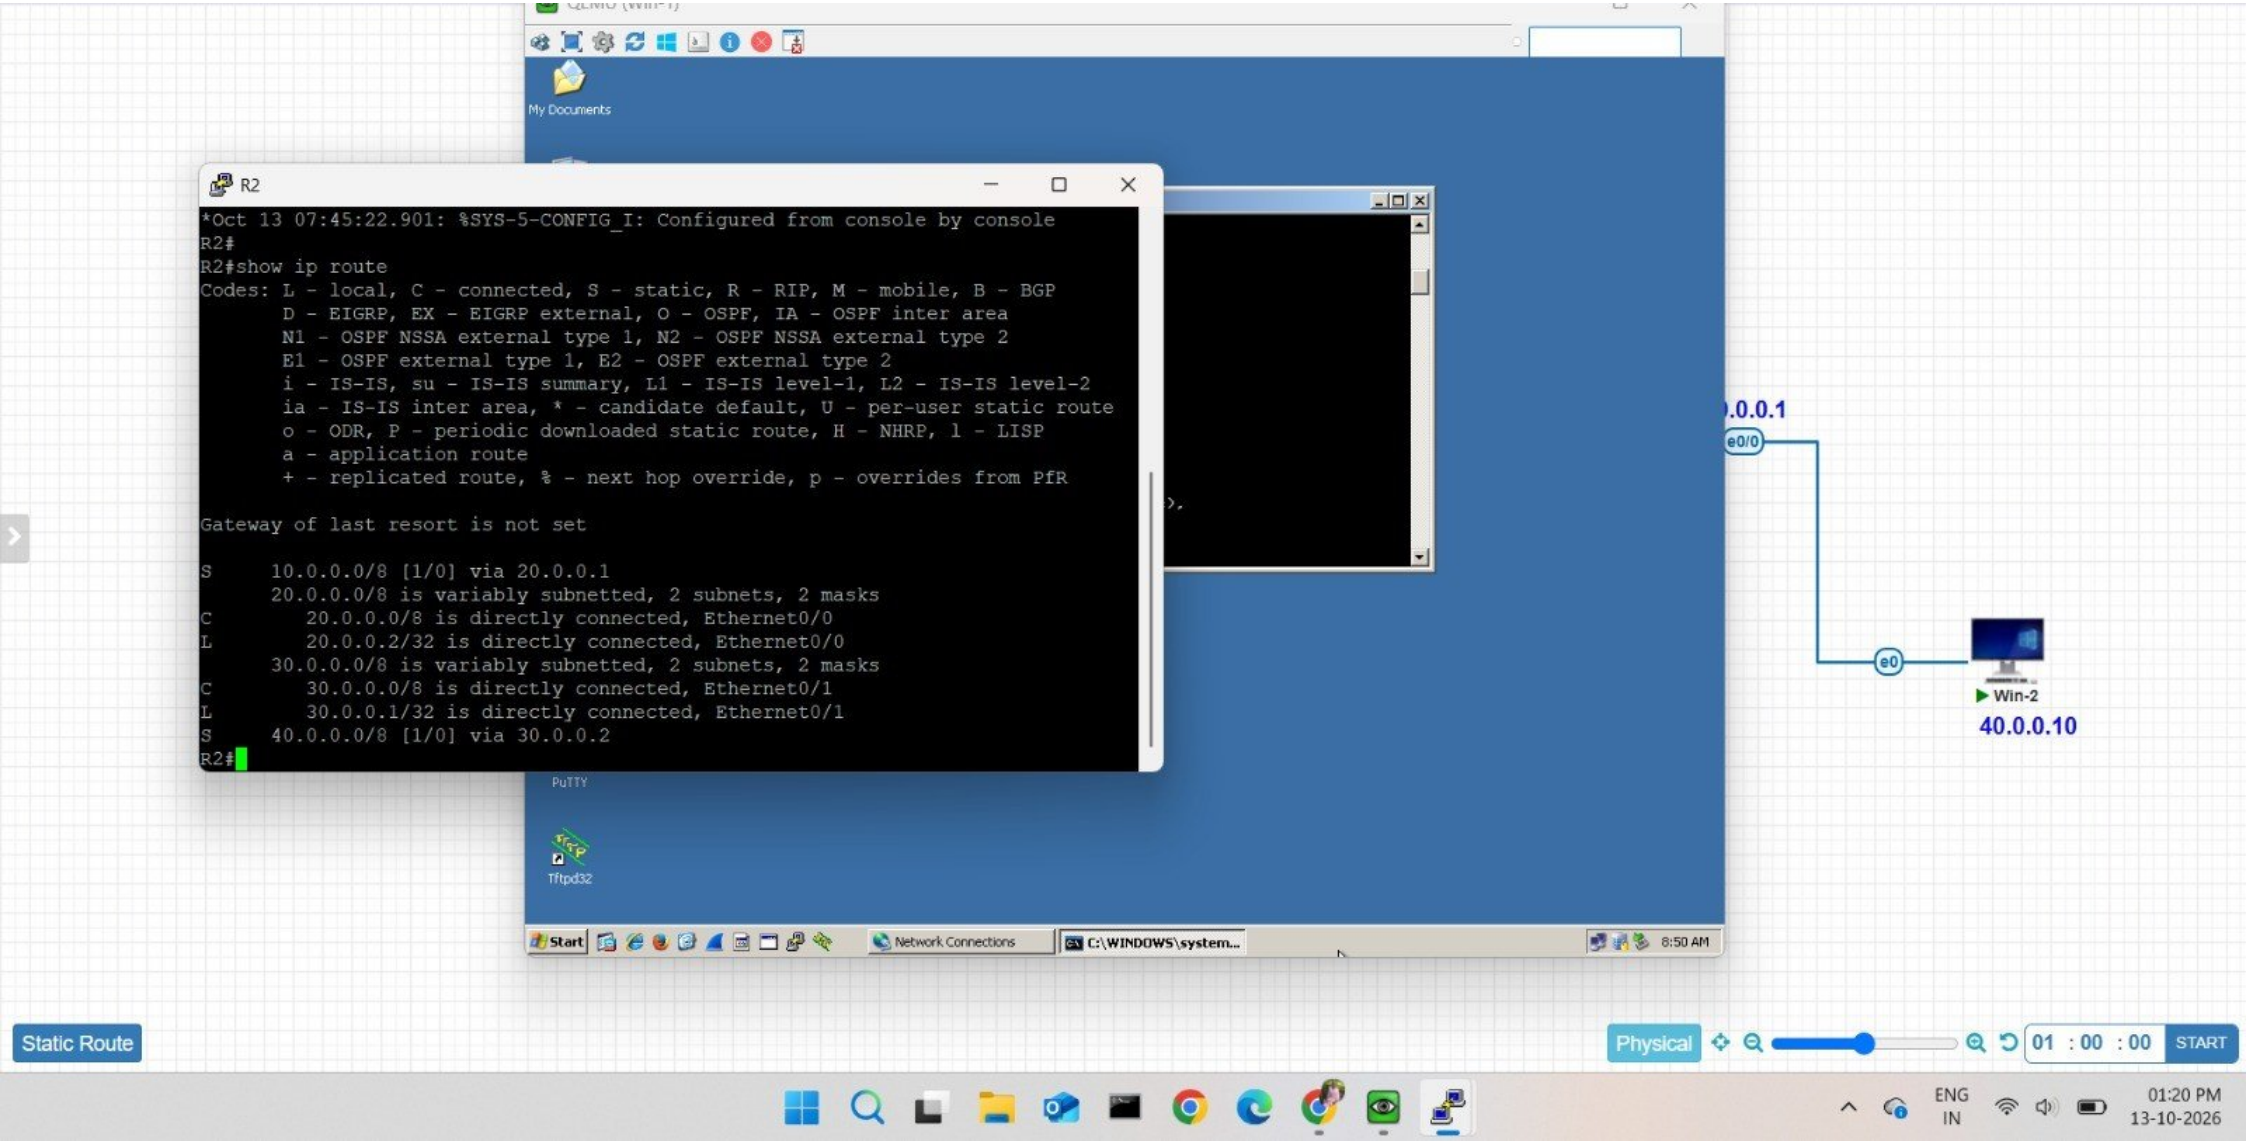
Physical

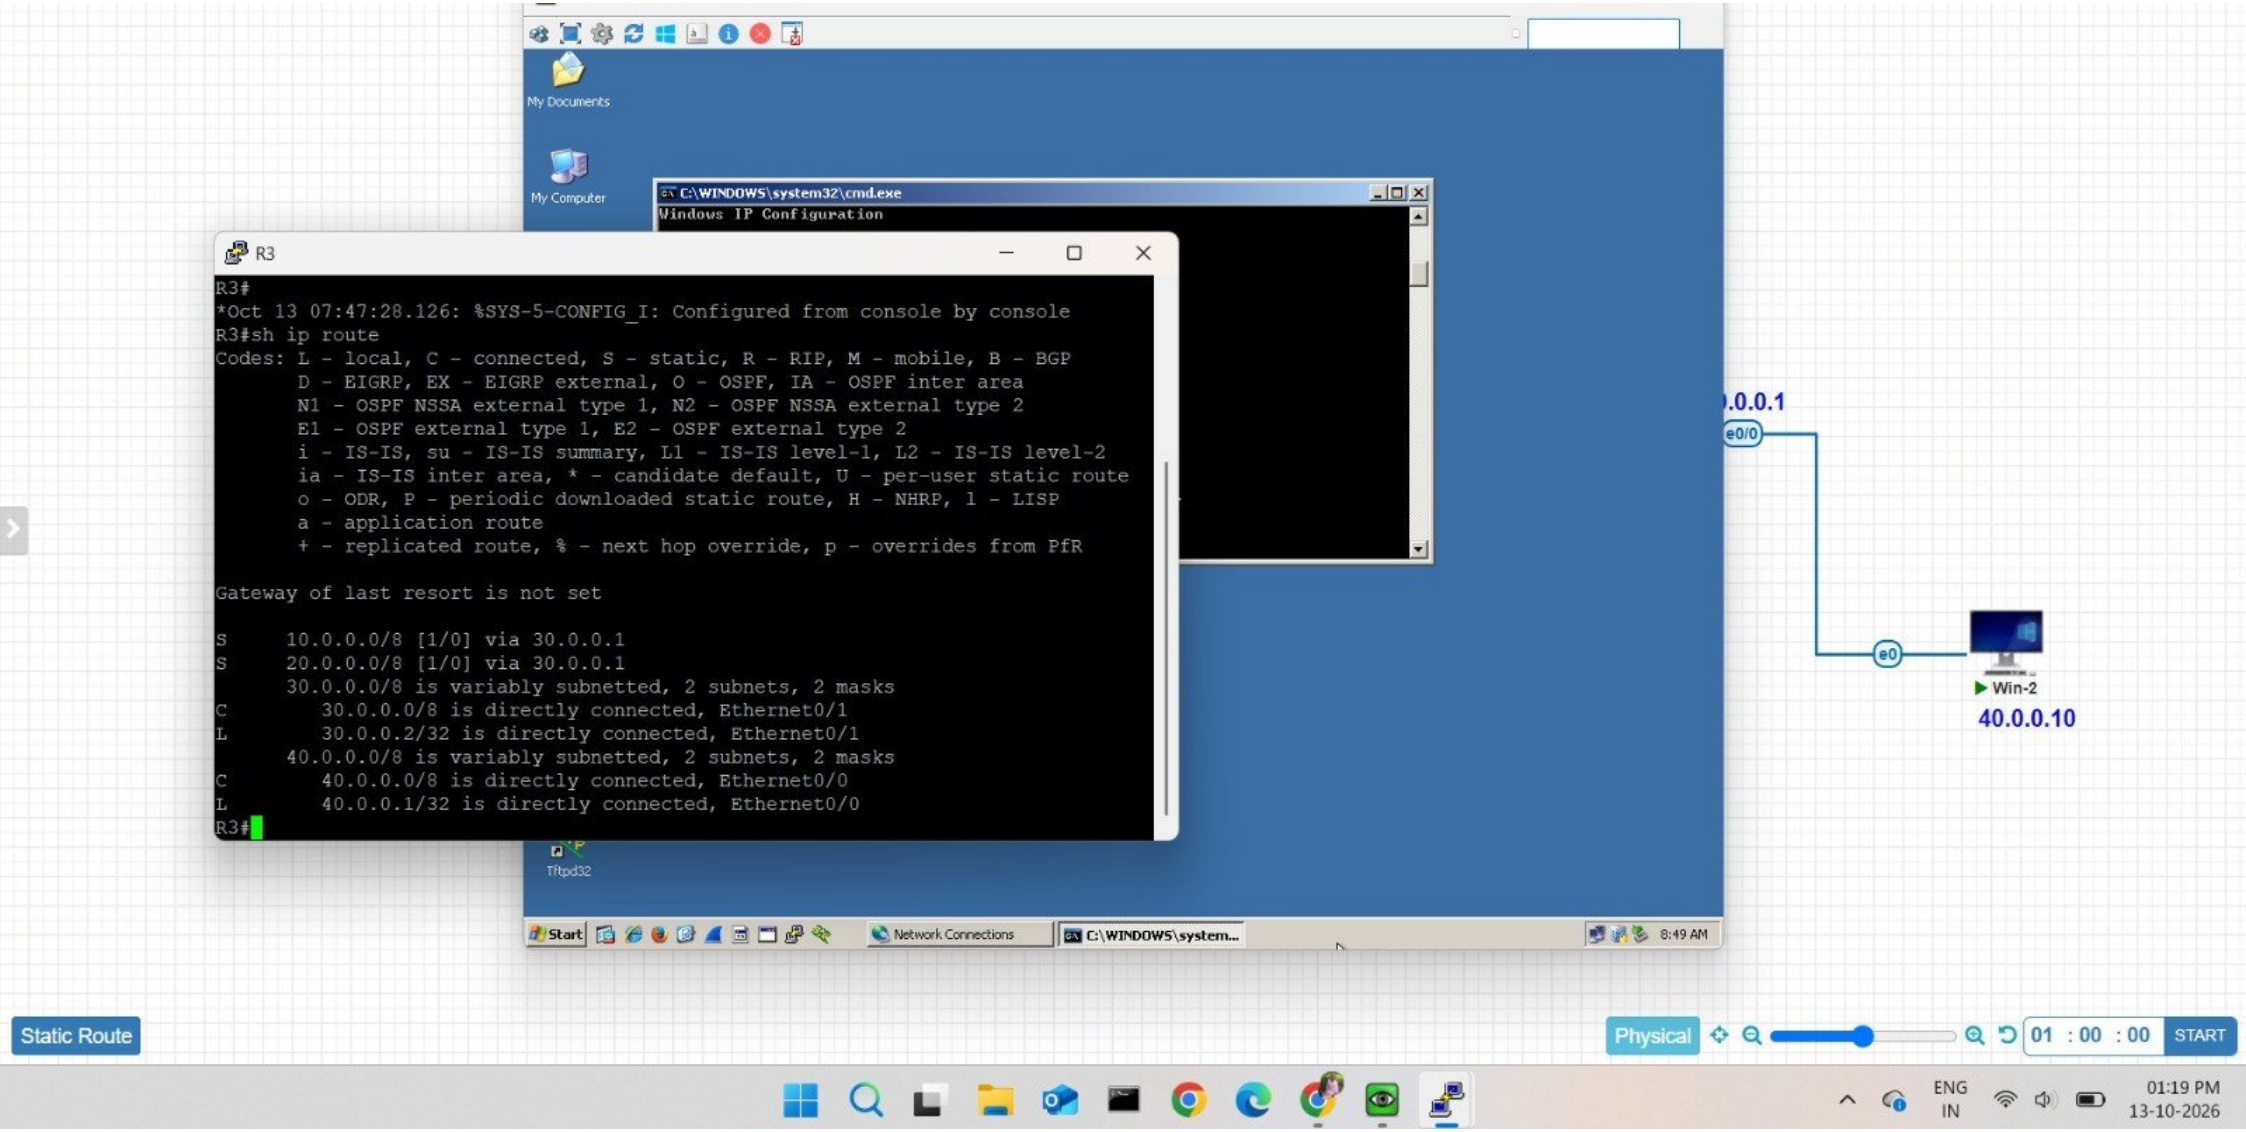
01 : 00 : 00

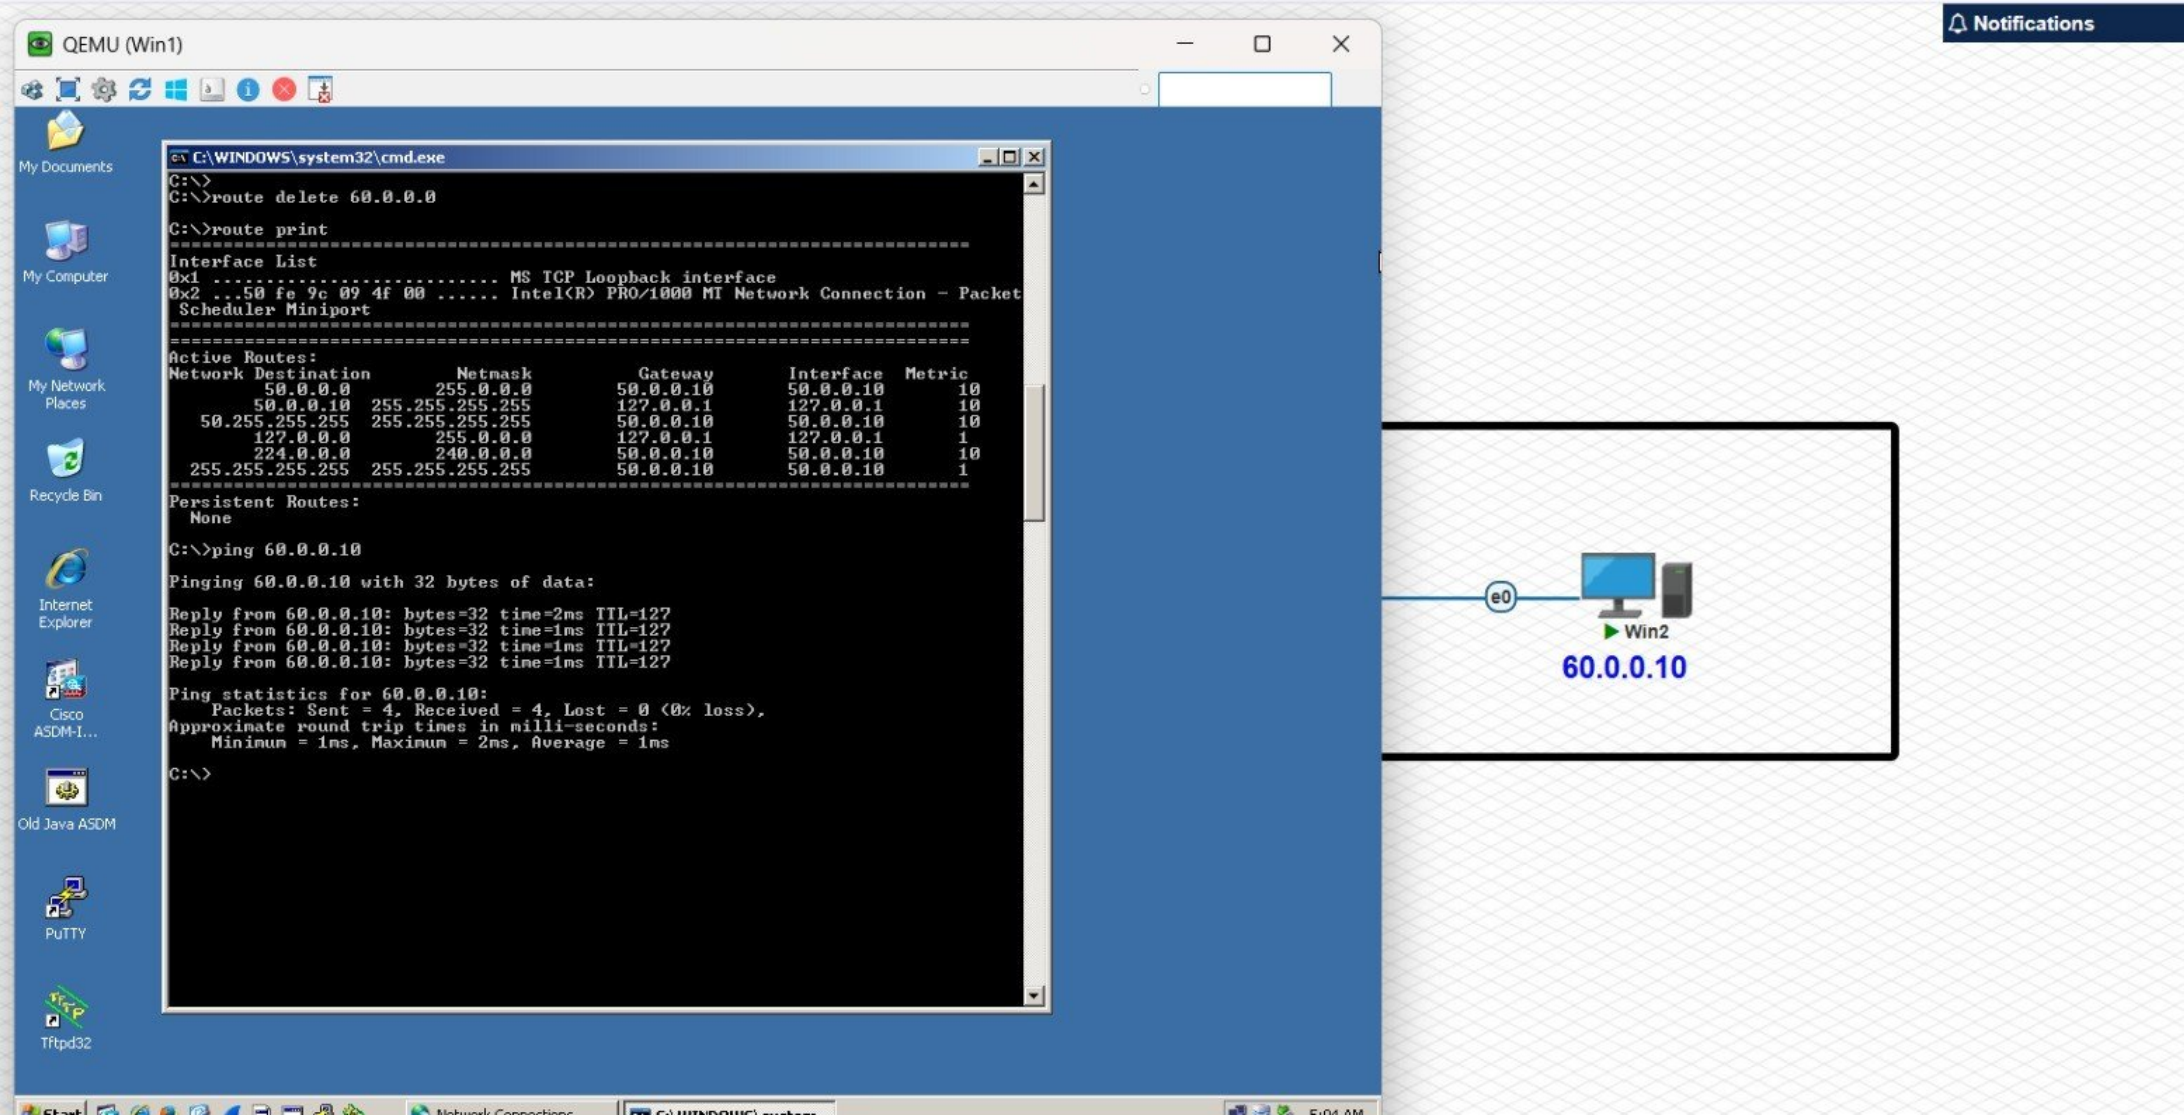
START

ENG
IN

01:21 PM
13-10-2026


My Documents
R2
*Oct 13 07:45:22.901: %SYS-5-CONFIG_I: Configured from console by console
R2#
R2#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR
Gateway of last resort is not set
S 10.0.0.0/8 [1/0] via 20.0.0.1
20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 20.0.0.0/8 is directly connected, Ethernet0/0
L 20.0.0.2/32 is directly connected, Ethernet0/0
30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 30.0.0.0/8 is directly connected, Ethernet0/1
L 30.0.0.1/32 is directly connected, Ethernet0/1
S 40.0.0.0/8 [1/0] via 30.0.0.2
R2#
PuTTY
Tftpd32
Start
Network Connections
C:\WINDOWS\system...
8:50 AM
.0.0.1
e0/0
e0
Win-2
40.0.0.10
Static Route
Physical
01 : 00 : 00
START
ENG
IN
01:20 PM
13-10-2026


My Documents
My Computer
C:\WINDOWS\system32\cmd.exe
Windows IP Configuration
R3
R3#
*Oct 13 07:47:28.126: %SYS-5-CONFIG_I: Configured from console by console
R3#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR
Gateway of last resort is not set
S 10.0.0.0/8 [1/0] via 30.0.0.1
S 20.0.0.0/8 [1/0] via 30.0.0.1
30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 30.0.0.0/8 is directly connected, Ethernet0/1
L 30.0.0.2/32 is directly connected, Ethernet0/1
40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 40.0.0.0/8 is directly connected, Ethernet0/0
L 40.0.0.1/32 is directly connected, Ethernet0/0
R3#
Tftpd32
Start
Network Connections
C:\WINDOWS\system...
8:49 AM
.0.0.1
e0/0
e0
Win-2
40.0.0.10
Static Route
Physical
01 : 00 : 00
START
ENG
IN
01:19 PM
13-10-2026


QEMU (Win1)
My Documents
My Computer
My Network Places
Recycle Bin
Internet Explorer
Cisco ASDM-I...
Old Java ASDM
PuTTY
Tftpd32
C:\WINDOWS\system32\cmd.exe
C:\>
C:\>route delete 60.0.0.0
C:\>route print
Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 fe 9c 09 4f 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet Scheduler Miniport
Active Routes:
Network Destination Netmask Gateway Interface Metric
50.0.0.0 255.0.0.0 50.0.0.10 50.0.0.10 10
50.0.0.10 255.255.255.255 127.0.0.1 127.0.0.1 10
50.255.255.255 255.255.255.255 50.0.0.10 50.0.0.10 10
127.0.0.0 255.0.0.0 127.0.0.1 127.0.0.1 1
224.0.0.0 240.0.0.0 50.0.0.10 50.0.0.10 10
255.255.255.255 255.255.255.255 50.0.0.10 50.0.0.10 1
Persistent Routes:
None
C:\>ping 60.0.0.10
Pinging 60.0.0.10 with 32 bytes of data:
Reply from 60.0.0.10: bytes=32 time=2ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127
Ping statistics for 60.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 2ms, Average = 1ms
C:\>
Notifications
e0
Win2
60.0.0.10