Hikvision HD Cameras

SL No	Model Number	Shape	PIXEL	24-11-2025	Product Specifications
	HD ECO Cameras				
1	DS-2CE5AD0T-ITP\ECO	Dome	2MP	670	1080P Resolution, CMOS Image Sensor, Up to 20m IR Distance, 2.8 mm/3.6 mm
2	DS-2CE1AD0T-ITP\ECO	Bullet	2MP	730	1080P Resolution, CMOS Image Sensor, Up to 20m IR Distance, 2.8 mm/3.6 mm
	HD Standard Cameras 1MP & 2MP				
1	DS-2CE76D0T-ITPFS	Dome	2MP	800	1080P, Built-in-Mic, Up to 20m IR Distance, Switchable to TVI/AHD/CVI/CVBS
2	DS-2CE16D0T-ITPFS	Bullet	2MP	890	1080P, Built-in-Mic, Up to 20m IR Distance, Switchable to TVI/AHD/CVI/CVBS
3	DS-2CE1AD0T-IT1F	Bullet	2MP	1540	1080P, CMOS Sensor, Up to 20m IR Distance, Switchable to TVI/AHD/CVI/CVBS, 6mm
4	DS-2CE1AD0T-IT3F	Bullet	2MP	1740	1080P, CMOS Sensor, Up to 40m IR Distance, Switchable to TVI/AHD/CVI/CVBS, 8mm
5	DS-2CE1AD0T-IT5F	Bullet	2MP	1940	1080P, CMOS Sensor, Up to 80m IR Distance, Switchable to TVI/AHD/CVI/CVBS, 12mm
6	DS-2CE76D3T-ITPF	Dome	2MP	1390	1080P, CMOS Sensor, Up to 20m IR Distance, Switchable, True WDR 120dB
7	DS-2CE16D3T-ITPF	Bullet	2MP	1420	1080P, CMOS Sensor, Up to 20m IR Distance, Switchable, True WDR 120dB
8	DS-2CE79D3T-IT3ZF	VF Dome	2MP	3430	1080P, CMOS Sensor, Up to 40m IR Distance, WDR, Switchable, Motorized Verifocal
9	DS-2CE19D3T-AIT3ZF	VF Bullet	2MP	3430	1080P, CMOS Sensor, Up to 40m IR Distance, WDR, Switchable, Motorized Verifocal
	HD Standard Cameras 5MP & 8MP				
1	DS-2CE76H0T-ITPFS	Dome	5MP	1240	2560 × 1944 Resolution, Built-in-Mic, Up to 20m IR Distance, Switchable 4-in-
2	DS-2CE16H0T-ITPFS	Bullet	5MP	1310	2560 × 1944 Resolution, Built-in-Mic, Up to 20m IR Distance, Switchable 4-in-
3	DS-2CE1AH0T-IT1F	Bullet	5MP	1840	2560 × 1944 Resolution, Up to 20m IR Distance, Switchable 4-in-1, 6mm
4	DS-2CE1AH0T-IT3F	Bullet	5MP	2040	2560 × 1944 Resolution, Up to 40m IR Distance, Switchable 4-in-1, 8mm
5	DS-2CE76U0T-ITPF	Dome	8MP	1930	3840 × 2160 Resolution, CMOS Sensor, Up to 30m IR Distance, Switchable 4-in-1
6	DS-2CE16U0T-ITPF	Bullet	8MP	1930	3840 × 2160 Resolution, CMOS Sensor, Up to 30m IR Distance, Switchable 4-in-1
	ColourVu HD Cameras 2MP, 2K, 5MP & 6MP				
1	DS-2CE70DF0T-PFS	Dome	2 MP	1640	1080P, CMOS Sensor, Up to 20m IR, Switchable, D-WDR, Warm Light, ColourVu with Audio
2	DS-2CE10DF0T-PFS	Bullet	2 MP	1700	1080P, CMOS Sensor, Up to 20m IR, Switchable, D-WDR, Warm Light, ColourVu with Audio
3	DS-2CE17D0T-LFS	Bullet	2 MP	1800	1080P, Built-in-Mic, Up to 40m IR, Switchable, D- WDR, Warm Light, ColourVu, IP 67
4	DS-2CE70DF3T-MFS	Dome	2 MP	2080	1080P, Built-in-Mic, Up to 20m IR, Switchable, True WDR, Warm Light, ColourVu
5	DS-2CE10DF3T-FS	Bullet	2 MP	2080	1080P, Built-in-Mic, Up to 20m IR, Switchable, True WDR, Warm Light, ColourVu
6	DS-2CE70KF0T-PFS	Dome	6 MP	2190	2960 × 1665 Resolution, Built-in-Mic, Switchable, D-WDR, Warm Light, ColourVu
7	DS-2CE10KF0T-PFS	Bullet	6 MP	2250	2960 × 1665 Resolution, Built-in-Mic, Switchable, D-WDR, Warm Light, ColourVu
8	DS-2CE12KF0T-FS	Bullet	6 MP	3280	2960 × 1665 Resolution, Built-in-Mic, Switchable, D-WDR, Warm Light, ColourVu
9	DS-2CE10DF3T-LPTS	Bullet	2 MP	2150	1920 × 1080 Resolution, TWO WAY TALK, Switchable, True WDR, Warm Light, ColourVu, IP 67
10	DS-2CE16D0T-LPTS	Bullet	2 MP	1520	1920 × 1080 Resolution, TWO WAY TALK, Switchable, D- WDR, Warm Light, ColourVu, IP 67
11	DS-2CE70D0T-PTLTS	Pan-Tilt	2 MP	1620	1920 × 1080 Resolution, TWO WAY TALK, Switchable, D-WDR, Warm Light, ColourVu
12	DS-2CE16K0T-LPTS	Bullet	3K	1820	2960 × 1665 Resolution, TWO WAY TALK, Switchable, D- WDR, Warm Light, ColourVu
13	DS-2CE78K0T-LTS	Dome	3K	1820	2960 × 1665 Resolution, TWO WAY TALK, Switchable, D- WDR, Warm Light, ColourVu, 40m IR
14	DS-2CE70DF3T-PTS	Pan-Tilt	6 MP	1940	2960 × 1665 Resolution, Built-in-Mic, Switchable, True WDR, Warm Light, ColourVu
15	DS-2CE76D0T-LPFS	Dome	2 MP	1120	1080P, Built-in-Mic, Up to 20m White light, Switchable, D-WDR, Smart Dual Light, IP67
16	DS-2CE16D0T-LPFS	Bullet	2 MP	1180	1080P, Built-in-Mic, Up to 20m White light, Switchable, D-WDR, Smart Dual Light, IP67
17	DS-2CE76G0T-LPFS	Dome	2K	1300	2K, Built-in-Mic, Up to 20m White light, Switchable, D-WDR, Smart Dual Light, IP67
18	DS-2CE16G0T-LPFS	Bullet	2K	1380	2K, Built-in-Mic, Up to 20m White light, Switchable, D-WDR, Smart Dual Light, IP67
19	DS-2CE76K0T-LPFS	Dome	3K	1510	3K , Built-in-Mic, Up to 20m White light, Dome, Switchable, D-WDR, Smart Dual Light, IP67
20	DS-2CE16K0T-LPFS	Bullet	3K	1580	3K , Built-in-Mic, Up to 20m White light, Bullet, Switchable, D-WDR, Smart Dual Light, IP67

Hikvision DVRs

SL No	Model Number	Input	Pixel		Product Specifications	
					e-DVR (e-SSD In-Built)	
1	DS-E04HGHI-B	4 CH	2 MP		2 MP Lite@15 fps, Up to 5MP IP 1-ch, 300 GB available, Appx. 10days Recording	
2	DS-E08HGHI-B	8 CH	2 MP		2 MP Lite@15 fps, Up to 5MP IP 2-ch, 480 GB available, Appx. 10days Recording	
3	DS-E04HQHI-B	4 CH	4 MP		4 MP Lite@15 fps, Up to 6 MP IP 1-ch, 480 GB available, Appx. 10days Recording	

SL No	Model Number	Input	Pixel		Product Specifications	
					ECO DVR 2MP	
1	DS-7104HGHI-M1/T	4 CH	2 MP	2150	TWO WAY TALK ENABLE, BNC interface, 1080p@15 fps, IP Cam up to 2MP 1-ch, H.265+, Input	
2	DS-7108HGHI-M1/T	8 CH	2 MP	3140	TWO WAY TALK ENABLE, BNC interface, 1080p@15 fps, IP Cam up to 2MP 2-ch, H.265+, Input	
3	DS-7116HGHI-M1/T	16 CH	2 MP	5320	TWO WAY TALK ENABLE, BNC interface, 1080p@15 fps, IP Cam up to 5MP 2-ch, H.265+, Input	
					Standard DVR 4MP	
1	iDS-7104HQHI-M1/S	4 CH	4 MP	3440	4mp@15fps & 1080p@25fps, IP Cam up to 6MP 2-ch, H.265+, 5-in-1 Video Input, Ac	
2	iDS-7108HQHI-M1/S	8 CH	4 MP	4930	4mp@15fps & 1080p@25fps, IP Cam up to 6MP 4-ch, H.265+, 5-in-1 Video Input, Ac	
3	iDS-7208HQHI-M2/FA	8 CH	4 MP	9130	4mp@15fps & 1080p@25fps, IP Cam up to 6MP 4-ch, H.265+, 5-in-1 Video Input,1 Ch Fac	
4	iDS-7116HQHI-M1/S	16 CH	4 MP	8510	4mp @15fps, IP Cam up to 6MP 8-ch, H.265+, 5-in-1, 16-ch Audio Cam Sup, AcuSe	
5	iDS-7104HQHI-M1/T	4 CH	4 MP	3440	Plastic Body, TWO WAY TALK ENABLE, IP Cam up to 6MP 2-ch, H.265+, 5-in-1, 4-ch Audio C Face, AcuSense	
6	iDS-7108HQHI-M1/T	8 CH	4 MP	4930	Plastic Body, TWO WAY TALK ENABLE, IP Cam up to 6MP 4-ch, H.265+, 5-in-1, 8-ch Audio Ch Face, AcuSense	
7	iDS-7116HQHI-M1/T	16 CH	4 MP	8510	Plastic Body, TWO WAY TALK ENABLE, IP Cam up to 6MP 8-ch, H.265+, 5-in-1, 16-ch Two Way Audio Su ,AcuSense	
8	iDS-7204HQHI-M1/XT	4 CH	4 MP	4030	Metal Body, IP Cam up to 6MP 2-ch, H.265+, 5-in-1, 4-ch Audio Cam Sup,1 Ch Face, A	
9	iDS-7208HQHI-M1/XT	8 CH	4 MP	5840	Metal Body, IP Cam up to 6MP 4-ch, H.265+, 5-in-1, 8-ch Audio Cam Sup, 2 Ch Face, A	
10	iDS-7216HQHI-M1/XT	16 CH	4 MP	10110	Metal Body, IP Cam up to 6MP 8-ch, H.265+, 5-in-1, 16-ch Two Way Audio Support, 4 Ch ,AcuSense	
11	iDS-7216HQHI-M2/XT	16 CH	4 MP	13430	Metal Body, IP Cam up to 6MP 8-ch, H.265+, 5-in-1, 16-ch Two Way Audio Support, 4 Ch ,AcuSense	
12	DS-7232HGHI-M2	32 CH	2 MP	18000	Metal Body, 720P/1080P Lite@15 fps, IP Cam upto 5MP 2 Ch, H.265+, 32ch Audio Via Acusense	
13	iDS-7232HQHI-M2/XT	32 CH	4 MP	22000	Metal Body, IP Cam up to 6MP 8-ch, H.265+, 5-in-1, 16-ch Audio Cam Sup, AcuSe	
					Standard DVR 8MP	
1	iDS-7204HUHI-M1/X	4 CH	8 MP	5040	Metal Body, IP Cam up to 8MP 2-ch, 8 MP@15 fps, 5 MP@20 fps, 4-ch Audio, Acu	
2	iDS-7208HUHI-M1/X	8 CH	8 MP	8120	Metal Body, IP Cam up to 8MP 4-ch, 8 MP@15 fps, 5 MP@20 fps, 8-ch Audio, Acu	
3	iDS-7208HUHI-M1/T	8 CH	8 MP	6850	Metal Body, TWO WAY TALK ENABLE, IP Cam up to 8MP 4-ch, 8 MP@15 fps, 5 MP@20 fp AcuSense	
4	iDS-7208HUHI-M2/X	8 CH	8 MP	11260	Metal Body, IP Cam up to 8MP 4-ch, 8 MP@15 fps, 5 MP@20 fps, 8-ch Audio, Acu	
5	iDS-7216HUHI-M2/X	16 CH	8 MP	14500	Metal Body, IP Cam up to 8MP 8-ch, 8 MP@15 fps, 5 MP@20 fps, 16-ch Audio Two w AcuSense	

Hikvision SMPS & 3+1 Cables

SL No	Model Number	Output	Housing		Product Specifications
1	DS-2FA1205-DW-IN	5 Amp	Metal	450	Output Screw - 2 (One +V and One -V) , Wall Mountable, 12VDC
2	DS-2FA120A-DW-IN	10 Amp	Metal	620	Output Screw - 4 (Two +V and Two -V) , Wall Mountable, 12VDC
3	DS-2FA120K-DW-IN	20 Amp	Metal	990	Output Screw - 4 (Two +V and Two -V) , Wall Mountable, 12VDC

SL No	Model Number	Length	Metal		Product Specifications
1	DS-1LH1SCA3C-090B	90 mtr	Copper	1840	Jacket - Flat, Material - PVC, Impedance - 75ohms, Braiding Density ≥80%, 99% Co
2	DS-1LH1SCAM593C	180 mtr	Copper	3600	Jacket - Flat, Material - PVC, Impedance - 75ohms, Braiding Density ≥80%, 99% Co
3	PT-CMR59P-090/B	90 mtr	Copper		Brand - PRAMA, Jacket - White, Round, Material -PVC, Colour Code - Red, Yellow &
4	PT-CMR59P-180/B	180 mtr	Copper		Brand - PRAMA, Jacket - White, Round, Material -PVC, Colour Code - Red, Yellow &
5	PT-CLN6-P/G	305 mtr	Copper		Material - PVC, Colour Code- Grey, 24.50 AWG, 99% Copper, CAT 6
6	DS-1LN6UZC0	305 mtr	Copper	7200	Material - PVC, Colour Code- Grey, 23 AWG, 99% Copper, CAT 6

Hikvision NVRs

SL No	Model Number	Input	Mbps		Product Specifications
					Q-Series NVR
1	DS-7104NI-Q1/M	4 CH	40 Mbps	3450	H.265+, Up to 2MP Support, 60Mbps Outgoing Bandwidth, 1-ch 10/100 RJ45
2	DS-7108NI-Q1/M	8 CH	60 Mbps	4100	H.265+, Up to 2MP Support, 60Mbps Outgoing Bandwidth, 1-ch 10/100 RJ45
3	DS-7116NI-Q1/M	16 CH	160 Mbps	5600	H.265+, Up to 4MP Support(3CH), 4K Enabled, 80Mbps Outgoing Bandwidth, 1-ch G
4	DS-7604NI-Q1	4 CH	40 Mbps	5000	H.265+, Up to 4MP Support, 4K Enabled, 80Mbps Outgoing Bandwidth, 1-ch 10/10
5	DS-7608NI-Q1	8 CH	80 Mbps	5550	H.265+, Up to 4MP Support, 4K Enabled, 80Mbps Outgoing Bandwidth, 1-ch 10/10
6	DS-7616NI-Q1	16 CH	160 Mbps	6200	H.265+, Up to 4MP Support, 4K Enabled, 80Mbps Outgoing Bandwidth, 1-ch Giga
7	DS-7608NI-Q2	8 CH	80 Mbps	6700	H.265+, Up to 4MP Support, 4K Enabled, 80Mbps Outgoing Bandwidth, 1-ch 10/10
8	DS-7616NI-Q2	16 CH	160 Mbps	8000	H.265+, Up to 4MP Support, 4K Enabled, 80Mbps Outgoing Bandwidth, 1-ch Giga
9	DS-7716NI-Q4	16 CH	160 Mbps	16250	H.265+, Up to 4MP Support, 4K Enabled, 80Mbps Outgoing Bandwidth, 1-ch Giga
					K-Series NVR
1	DS-7604NXI-K1	4 CH	40 Mbps	6350	AcuSense, H.265+, Up to 8MP Support, 4K Enabled, 40Mbps Branding, 1-ch Giga

2	DS-7608NXI-K1	8 CH	80 Mbps	6950	AcuSense, H.265+, Up to 8MP Support, 4K Enabled, 80Mbps Banding, 1-ch Giga
3	DS-7616NXI-K1	16 CH	160 Mbps	8350	AcuSense, H.265+, Up to 8MP Support, 4K Enabled, 160Mbps Banding, 1-ch Giga
4	DS-7608NXI-K2	8 CH	80 Mbps	9000	AcuSense, H.265+, Up to 8MP Support, 4K Enabled, 80Mbps Bandwidth, 1-ch Giga
5	DS-7616NXI-K2	16 CH	160 Mbps	9950	AcuSense, H.265+, Up to 8MP Support, 4K Enabled, 160Mbps Bandwidth, 1-ch Giga
6	DS-7632NXI-K2	32 CH	256 Mbps	12000	AcuSense, H.265+, Up to 8MP Support, 4K Enabled, 256Mbps Bandwidth, 1-ch Giga
7	DS-7716NXI-K4	16 CH	160 Mbps	19500	Acusense,H.265+, Up to 8MP Support, 4K Enabled, 160Mbps Bandwidth, 1-ch Giga
8	DS-7732NXI-K4	32 CH	256 Mbps	24500	Acusense,H.265+, Up to 8MP Support, 4K Enabled, 256Mbps Bandwidth, 1-ch Giga
9	DS-8632NXI-K8	32 CH	256 Mbps	41500	Acusense,H.265+, Up to 8MP Support, 4K Enabled, 256 Mbps Bandwidth, 1-ch Giga
10	DS-7764NI-M4	64 CH	400 Mbps	33500	Acusense,H.265+, Up to 8MP Support, 4K Enabled, 400Mbps Bandwidth, 2-ch Giga

Hikvision Video Door Phone(VDP)

SL No	Model Number	Shape	Screen Size		Product Specifications
				Analog VDP	
1	DS-KIS202T	Kit	7 inch	4060	Kit including Outdoor - DS-KB2411T-IM and Indoor - DS-KH2220, 1 relay outpu
2	DS-KIS204T	Kit	7 inch	4350	Kit including DS-KB2411T-IM & DS-KH2220-S, 1 relay output, 200 pic Library
3	DS-KH2220-S	Screen	7 inch	2900	7-Inch Colorful TFT LCD, Physical Button, Microphone, Loudspeaker, 200 Image St
				Network VDP	
1	DS-KIS602	Kit	7 inch	14990	Kit Including DS-KD8003-IME1 & DS-KH6320-WTE1, 2 Relay output, TF Card Slo
2	DS-KIS603-P	Kit	7 inch	11850	Wi-Fi & LAN, 1 Relay output, TF Card Slot, 7-inch Colorful Touch Screen
3	DS-KH6320-WTE1	Screen	7 inch	5500	7-inch Colorful Touch Screen with Resolution 1024 × 600, TF Card Slot, 2 Relay ou
4	DS-KV8413-WME1	Outdoor	---	8900	4 Button Villa Door Station, IP65, IK08, Low illumination IR 3 mtr, WDR, 2.4G W

Hikvision Access Control & Biometrics

| SL No	Model Number	Face	Finger		Product Specifications
				Without Access Control (Attendance Only)	
1	DS-K1A8503EF	---	1000		Finger Print only, Event Logs - 100000, 2.4-inch TFT, LAN
2	DS-K1A8503EF-B	---	1000		Finger Print only, Event Logs - 100000, 2.4-inch TFT, LAN, With Battery
3	DS-K1A340WX	1500	---		Only Face, 4.3-inch Touchscreen, Recog. Distance -0.3m to 1.5m, Event Logs - 3Lakl
4	DS-K1A340FWX	1500	3000		Face & Finger, 4.3-inch Touch, Recog. Distance -0.3m to 1.5m, Event Logs - 3Lakh,
				With Access Control	
1	DS-K1T8003MF	---	1000		Finger Print only, Event Logs - 100000, 2.4-inch TFT, LAN
2	DS-K1T320EWX	500	---		2.4-inch Display, Recog. Distance -0.3m to 1.5m, Event Logs - 1 Lakh, LAN & Wi
3	DS-K1T320EFWX	500	1000	4350	2.4-inch Display, Recog. Distance -0.3m to 1.5m, Event Logs - 1 Lakh, LAN & Wi
4	DS-K1T320EFWX-B	500	1000	5400	2.4-inch Display, Recog. Distance -0.3m to 1.5m, Event Logs - 1 Lakh, LAN & WiFi, with
5	DS-K1T331W (Metal)	1000	---		3.97-inch Touchscreen, Recog. Distance -0.3m to 1.5m, Event Logs - 1 Lakh, LAN &
6	DS-K1T343EWX	1500	---		4.3-inch Touchscreen, Recog. Distance -0.3m to 1.5m, Event Logs - 1.5 Lakh, LAN &
7	DS-K1T343EFWX	1500	3000		4.3-inch Touchscreen, Recog. Distance -0.3m to 1.5m, Event Logs - 1.5 Lakh, LAN &
8	DS-K1T342EFWX	1500	3000		4.3-inch Touchscreen, Distance -0.3m to 1.5m, Event Logs - 1.5 Lakh, LAN & WiFi,
9	DS-K1T342MFWX	1500	3000		4.3-inch Touchscreen, Distance -0.3m to 1.5m, Event Logs - 1.5 Lakh, LAN & WiFi,
10	DS-K1T341CMF (Metal)	3000	3000		4.3-inch Touchscreen, Recog. Distance -0.3m to 1.5m, Event Logs - 1.5 Lakh, LAN,

Hikvision Monitors

SL No	Model Number	Screen Size		Product Specifications
1	DS-D5022QE-D	22 Inch	4250	21.5", 1080P, HDMI/VGA Input, view angle 178°,Base Bracket Inclued, VESA, 12V DC, W
2	DS-D5032QE	32 Inch	10900	31.5", 1080P, HDMI/VGA Input, view angle 178°,Base Bracket Included, VESA, 12V DC, 10 24*7 Working hour
3	DS-D5043QE	43 Inch	19000	43", 1080P, HDMI/VGA Input, view angle 178°,Base Bracket Included, VESA, 12V DC, 10 24*7 Working hour

For Any **Queries** please Contact Subhankar Das 8250999521 Anita pradhan 8250999523 Sandip Sasmal 8250999522 Dipak Shaw 8250999511 MANIKA ORDER SUPPLIER
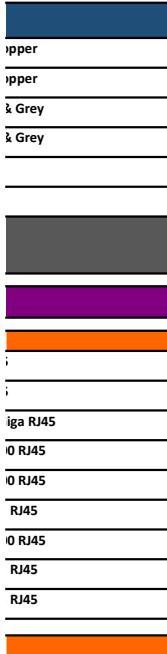
| |
| --- |
| 5-in-1 Video |
| 5-in-1 Video |
| 5-in-1 Video |

:usense
:usense
:e, Acusense
ense
Cam Sup,1 Ch
o Cam Sup, 2
upport, 4 Ch Face Capture
AcuSense
AcuSense
Face Capture
Face Capture
n Coaxial,
ense

Sense
Sense
s, 8-ch Audio,
Sense
ay Audio,

opper

opper

& Grey

& Grey

;

;

iga RJ45

0 RJ45

0 RJ45

RJ45

0 RJ45

RJ45

RJ45

RJ45

RJ45

RJ45

RJ45

a RJ45

a RJ45

a RJ45

a RJ45

a RJ45

a RJ45

ut

orage

ot

tput

i-Fi

h, WiFi

WiFi

iFi

iFi

Battery.

WiFi

WiFi

WiFi

IP65

IP65

IP65

orking hour

W Speaker,

W Speaker,