

2500/3000/3500kg Forklift Truck

CPC(Q)D25/30/35T


1 Robust performance for various industrial applications

The IC truck CPC(Q)D25/30/35T is powerful, easy to operate and dependable. The forklift for loads between 3,000 and 3,500kg is particularly well suited for high loads in multi-shift operation and assignments in the harshest outdoor conditions.



2 Durable components for long-term usage

The CPC(Q)D25/30/35T is equipped with pneumatic tyres as standard and mature components for long-term operation and big loads under heavy and harsh conditions.

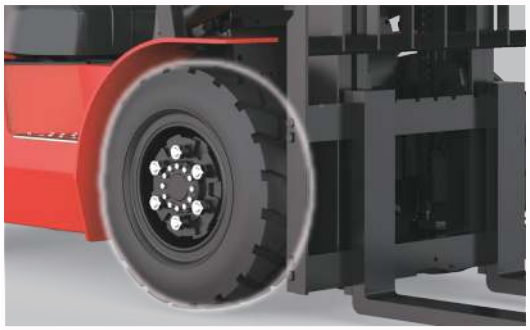

3 Safety assurance

The CPC(Q)D25/30/35T offers outstanding visibility of the load and the surroundings. Its high ground clearance is ideal for uneven surfaces and other outdoor environments.





PARAMETERS

General	1	Manufacturer				H2H	H2H	H2H	H2H	H2H	H2H	H2H	H2H	H2H
	2	Model				CPCD25T	CPCD25T	CPCD25T	CPQD25T	CPCD30T	CPCD30T	CPCD30T	CPCD30T	CPQD30T
	3	Power type				Diesel	Diesel	Diesel	Gasoline	Diesel	Diesel	Diesel	Diesel	Gasoline
	4	Rated capacity			Kg	2500	2500	2500	2500	3000	3000	3000	3000	3000
	5	Load center			mm	500	500	500	500	500	500	500	500	500
Dimensions	6	Lift height		B	mm	3000	3000	3000	3000	3000	3000	3000	3000	3000
	7	Free lift height		E	mm	120	120	120	120	140	140	140	140	140
	8	Fork size	L x W x T	J/W/T	mm	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×125×45	1070×125×45	1070×125×45	1070×125×45	1070×125×45
	9	Mast tilt range	F/R	F/K (°)	deg	6/10	6/10	6/10	6/10	6/10	6/10	6/10	6/6	6/10
	10	Front overhang (wheel center to fork face)		K	mm	475	475	475	475	481	481	481	481	481
	11	Rear overhang		M	mm	495	495	495	495	561	561	561	561	561
		Overall dimensions	Length to face of forks	Y	mm	2620	2620	2620	2620	2792	2792	2792	2792	2792
	13		Overall width	Q	mm	1150	1150	1150	1150	1225	1225	1225	1225	1225
			Mast lowered height	C	mm	2050	2050	2050	2050	2070	2070	2070	2070	2070
	15		Mast extended height	A	mm	4000	4000	4000	4000	4120	4120	4120	4120	4120
			Overhead guard height	P	mm	2170	2170	2170	2170	2190	2190	2190	2190	2190
	17	Turning radius		R	mm	2270	2270	2270	2270	2400	2400	2400	2400	2400
Performance		Speed	Travel speed(laden/unladen)		Km/h	18/18	18/18	18/18	18/18	18/19	18/19	18/19	18/19	18/19
	19		Lifting speed(laden/unladen)		mm/sec	450/500	450/500	450/500	450/500	440/470	440/470	440/470	440/470	440/470
			Lowering speed(laden/unladen)		mm/sec	450/500	450/500	450/500	450/500	410/450	410/450	410/450	410/450	410/450
	21	Max drawbar pull (laden)			N	20000	20000	20000	20000	19000	19000	19000	19000	19000
	22	Max gradeability			%	20	20	20	20	20	20	20	20	20
Chassis	23	Tyres	Front		mm	700–12–12PR	700–12–12PR	700–12–12PR	700–12–12PR	28×9–15–14PR	28×9–15–14PR	28×9–15–14PR	28×9–15–14PR	28×9–15–14PR
			Rear		mm	600–9–10PR	600–9–10PR	600–9–10PR	600–9–10PR	6.50–10–10PR	6.50–10–10PR	6.50–10–10PR	6.50–10–10PR	6.50–10–10PR
	25	Tread	Front	U	mm	970	970	970	970	1010	1010	1010	1010	1010
			Rear	V	mm	970	970	970	970	980	980	980	980	980
	27	Wheelbase		L	mm	1650	1650	1650	1650	1750	1750	1750	1750	1750
		Ground clearance	Mast lowest position		mm	135/110	135/110	135/110	135/110	150/120	150/120	150/120	150/120	150/120
	29		Wheelbase center		mm	160/145	160/145	160/145	160/145	170/150	170/150	170/150	170/150	170/150
Weight	30	Service weight			Kg	3650	3650	3650	3650	4200	4200	4200	4200	4200
	31	Weight distribution	Laden / Front		Kg	5440	5440	5440	5440	6390	6390	6390	6390	6390
			Laden / Rear		Kg	710	710	710	710	810	810	810	810	810
	33		Unladen / Front		Kg	1470	1470	1470	1470	1710	1710	1710	1710	1710
			Unladen / Rear		Kg	2180	2180	2180	2180	2490	2490	2490	2490	2490
Power & transmission	35	Battery	Voltage / Capacity		V/Ah	12/80	12/80	12/80	12/80	12/80	12/80	12/80	12/80	12/80
		Engine	Model			S4S-DPEU2	C490BPG-25	C240	GK25	S4S-DPEU2	C490BPG-25	C240	3E22YG51	GK25
	37		Manufacturer			Mitsubishi	CHINA	ISUZU	GCT	Mitsubishi	CHINA	ISUZU	XINCHAI	GCT
			Rated output/t.p.m		kw	35.3/2250	36.8/2650	34.5/2500	37.4/2300	35.3/2250	36.8/2650	34.5/2500	44.8/2400	37.4/2300
	39		Rated torque/t.p.m		N.m	177/1700	156/1700–1900	139/1800	176.5/1600	177/1700	156/1700–1900	139/1800	210/1600–1800	176.5/1600
			No. of cylinders			4	4	4	4	4	4	4	3	4
	41		Bore x Stroke		mm	94×120	90×105	86×102	89×100	94×120	90×105	86×102	94×107	89×100
			Emission		cc	3331	2670	2369	2488	3331	2670	2369	2230	2488
	43		Fuel tack capacity		L	60	60	60	60	60	60	60	Euro V	60
		Transmission	Manufacturer											
	45		Type			Hydraulic powershift	Hydraulic powershift	Hydraulic powershift	Hydraulic powershift	Hydraulic powershift	Hydraulic powershift	Hydraulic powershift	Hydraulic powershift	Hydraulic powershift
			Stage	FWD/RVS										
	47	Operation pressure			Mpa	16	16	16	16	17.5	17.5	17.5	17.5	17.5


PARAMETERS

CPC(Q)D25/30/35T

General	1	Manufacturer				H2H	H2H	H2H	H2H	H2H
	2	Model				CPCD35T	CPCD35T	CPCD35T	CPCD35T	CPQD35T
	3	Power type				Diesel	Diesel	Diesel	Diesel	Gasoline
	4	Rated capacity			Kg	3500	3500	3500	3500	3500
	5	Load center			mm	500	500	500	500	500
Dimensions	6	Lift height		B	mm	3000	3000	3000	3000	3000
	7	Free lift height		E	mm	145	145	145	145	145
	8	Fork size	L x W x T	J/W/T	mm	1070×125×45	1070×125×45	1070×125×45	1070×125×45	1070×125×45
	9	Mast tilt range	F/R	F/K (°)	deg	6/10	6/10	6/10	6/10	6/10
	10	Front overhang (wheel center to fork face)		K	mm	486	486	486	486	486
	11	Rear overhang		M	mm	561	561	561	561	561
		Overall dimensions	Length to face of forks	Y	mm	2797	2797	2797	2797	2797
	13		Overall width	Q	mm	1225	1225	1225	1225	1225
			Mast lowered height	C	mm	2070	2070	2070	2070	2070
	15		Mast extended height	A	mm	4120	4120	4120	4120	4120
			Overhead guard height	P	mm	2190	2190	2190	2190	2190
	17	Turning radius		R	mm	2400	2400	2400	2400	2400
Performance		Speed	Travel speed(laden/unladen)		Km/h	18/19	18/19	18/19	18/19	18/19
	19		Lifting speed(laden/unladen)		mm/sec	400/470	400/470	400/470	440/470	400/470
			Lowering speed(laden/unladen)		mm/sec	410/450	410/450	410/450	410/450	410/450
	21	Max drawbar pull (laden)			N	19000	19000	19000	19000	19000
	22	Max gradeability			%	20	20	20	20	20
Chassis	23	Tyres	Front		mm	28×9–15–14PR	28×9–15–14PR	28×9–15–14PR	28×9–15–14PR	28×9–15–14PR
			Rear		mm	6.50–10–10PR	6.50–10–10PR	6.50–10–10PR	6.50–10–10PR	6.50–10–10PR
	25	Tread	Front	U	mm	1010	1010	1010	1010	1010
			Rear	V	mm	980	980	980	980	960
	27	Wheelbase		L	mm	1750	1750	1750	1750	1750
		Ground clearance	Mast lowest position		mm	150/120	150/120	150/120	150/120	150/120
	29		Wheelbase center		mm	170/150	170/150	170/150	170/150	170/150
Weight	30	Service weight			Kg	4200	4200	4200	4200	4200
	31	Weight distribution	Laden / Front		Kg	6390	6390	6390	6390	6390
			Laden / Rear		Kg	810	810	810	810	810
	33		Unladen / Front		Kg	1710	1710	1710	1710	1710
			Unladen / Rear		Kg	2490	2490	2490	2490	2490
Power & transmission	35	Battery	Voltage / Capacity		V/Ah	12/80	12/80	12/80	12/80	12/80
		Engine	Model			S4S-DPEU2	A498BT1-39	4JG2	3E22YG51	GK25
	37		Manufacturer			Mitsubishi	CHINA	ISUZU	XINCHAI	GCT
			Rated output/t.p.m		kw	35.3/2250	36.8/2400	44.9/2450	44.8/2400	37.4/2300
	39		Rated torque/t.p.m		N.m	177/1700	186/1600–1800	184.7/1700	210/1600–1800	176.5/1600
			No. of cylinders			4	4	4	3	4
	41		Bore x Stroke		mm	94×120	98×105	95.4X107	94×107	89×100
			Emission		cc	3331	3168	3059	2230	2488
	43		Fuel tack capacity		L	60	60	60	Euro V	60
		Transmission	Manufacturer							
	45		Type			Hydraulic powershift	Hydraulic powershift	Hydraulic powershift	Hydraulic powershift	Hydraulic powershift
			Stage / FWD/RVS							
	47	Operation pressure			Mpa	17.5	17.5	17.5	17.5	17.5


LINE GRAPH


CPC(Q)D25/30/35T

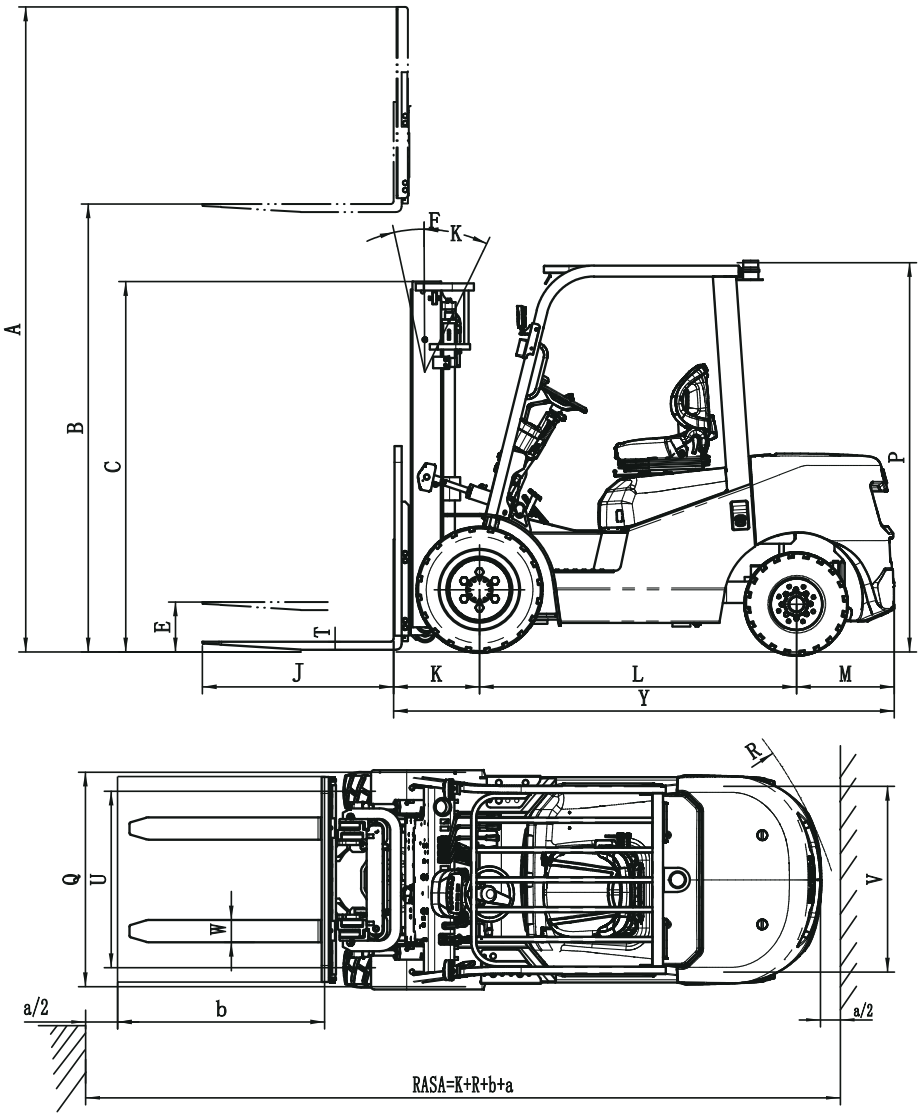

LINE GRAPH

CPC(Q)D25/30/35T

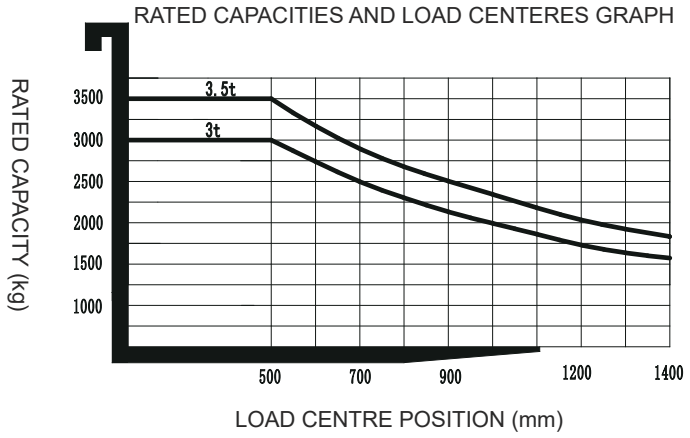

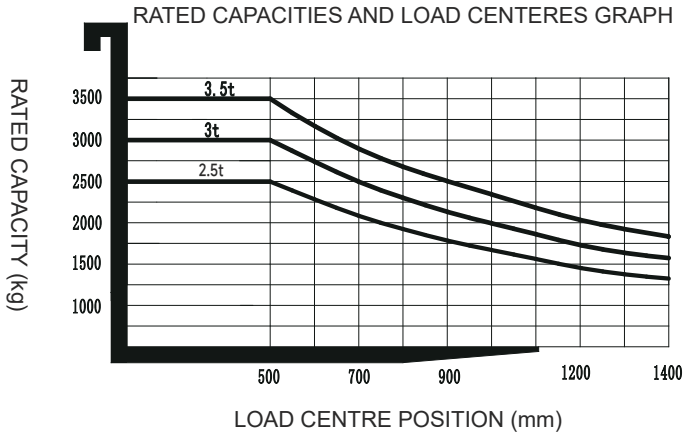

MAST OPTION

	Type	Lift height h3	Height, mast			Height,Free lift(h2)		Load distance centre of drive axle to fork X			Tilt of mast/fork carriageforward/ backward		Load capacity 500mm Load center distance					
			Height, mast lowered(h1)	Height, mast extended(h4)		No backrest	With backrest	2.5t	3.0t	3.5t	α	β	Single front tyre	Double front tyre	Single front tyre	Double front tyre	Single front tyre	Double front tyre
				No backrest	With backrest								2.5t	2.5t	3.0t	3.0t	3.5t	3.5t
		mm	mm	mm	mm	mm	mm	mm	mm	mm	Deg	Deg	kg	kg	kg	kg	kg	kg
Wide-view mast	2W200	2000	1570	2570	3260	140	140	476	481	486	6	10	2500	2500	3000	3000	3500	3500
	2W250	2500	1920	3070	3760	140	140	476	481	486	6	10	2500	2500	3000	3000	3500	3500
	2W270	2700	1920	3270	3960	140	140	476	481	486	6	10	2500	2500	3000	3000	3500	3500
	2W300	3000	2070	3570	4260	140	140	476	481	486	6	10	2500	2500	3000	3000	3500	3500
	2W330	3300	2220	3690	4420	140	140	476	481	486	6	10	2500	2500	3000	3000	3500	3500
	2W350	3500	2320	3890	4620	140	140	476	481	486	6	10	2500	2500	3000	3000	3500	3500
	2W360	3600	2370	3990	4720	140	140	476	481	486	6	10	2500	2500	3000	3000	3500	3500
	2W400	4000	2570	4340	5120	140	140	476	481	486	6	6	2100	2450	2700	2900	3000	3400
	2W430	4300	2770	4340	5420	140	140	476	481	486	6	6	2100	2450	2700	2900	3000	3400
	2W450	4500	2870	4540	5620	140	140	476	481	486	6	6	2100	2450	2700	2900	3000	3400
2-free mast	2F250	2500	1805	2220	2900	1210	560	476	481	486	6	10	2500	2500	3000	3000	3500	3500
	2F270	2700	1905	2420	3100	1360	660	476	481	486	6	10	2500	2500	3000	3000	3500	3500
	2F300	3000	2055	2620	3300	1460	810	476	481	486	6	10	2500	2500	3000	3000	3500	3500
	2F330	3300	2205	2820	3500	1610	960	476	481	486	6	10	2500	2500	3000	3000	3500	3500
	2F360	3600	2355	4020	4710	1760	1110	476	481	486	6	10	2500	2500	3000	3000	3500	3500
	2F400	4000	2555	4420	5110	1960	1310	476	481	486	6	10	2500	2500	3000	3000	3500	3500
3-free mast	3F430	4300	2095	4910	5570	1360	730	490	495	500	6	6	2000	2400	2550	2850	2850	3350
	3F450	4500	2195	5110	5770	1510	880	490	495	500	6	6	2000	2400	2550	2850	2850	3350
	3F480	4800	2280	5375	6050	1565	915	490	495	500	6	6	1700	2100	2250	2550	2450	2950
	3F500	5000	2380	5575	6250	1715	1065	490	495	500	6	6	1700	2100	2250	2550	2450	2950
	3F550	5500	2615	6150	6830	1770	1120	490	495	500	3	6	1200	1800	1650	2250	1800	2550
	3F600	6000	2815	6650	7330	2120	1470	490	495	500	3	6	1200	1800	1650	2250	1800	2550

No.	Optional items	CPC(Q)D25/30/35T
1.1	Fork dimensions	●122*45*1070○122*45*1150○122*45*1220○122*45*1370○122*45*1520 ○122*45*1600○122*45*1700○122*45*1820○122*45*2000○122*45*2200○122*45*2400
1.4	Fork carriage width	●1100mm○Yes and can be customized
1.5	Fork carriage height	●1095mm○Yes and can be customized
2.5	Front tyre	●Pneumatic○Solid○Non-marking solid
2.6	Rear tyre	●Pneumatic○Solid○Non-marking solid
2.7	Seat	●Regular○Premium○Suspension○Suspension + seatbelt logic switch
2.8	Attachment	●No○Built-in sideshift○External sideshift○Fork positioner
2.10	Traction pin	●Yes
3.4	Front light	●LED
3.5	Rear light	●No○LED
3.6	Warning light	●Yes
3.7	Steering light	●Yes
3.8	Blue spot	●No○2 front○1 rear○2 front + 1 rear
3.9	Area warning light	●No○Red lights on both sides
3.10	Rearview mirror	●1 rearview mirror○Add 2 on both sides
3.11	Buzzer	●Yes
3.16	OPS	●No○Yes and not customized
3.20	Remote monitoring	●No○Yes and not customized
4.1	Cabin	●No○Basic half cabin○Upgrade half cabin○Full cabin

Note: ●Standard ○Optional