EFL252X2

Li-ion Counterbalance Forklift Truck 2500kg

Let's grow together



- The most entry-level and budget-friendly alternative to IC trucks and second-hand trucks
- Maintenance free battery and single phase onboard charger with plug for maximum ease of use
- Proportional lifting system for precise operation
- Lithium technology battery and PMSM technology for better energy efficiency and extended runtime
- Waterproof design, high ground clearance and big tyres for both indoor and outdoor applications

Manufacturer			EP
Model designation			EFL252X2
Drive			Electric
Load capacity	Q	kg	2500
Load center distance	c	mm	500
Service weight		kg	4116
Retracted mast height	h1	mm	2090
Lift height	h3	mm	3000
Height, mast extended	h4	mm	4025
Length to face of forks	l2	mm	2528
Overall width	b1/b2	mm	1154
Fork dimensions	s/e/l	mm	40×122×1070
Turning radius	Wa	mm	2258
Travel speed, laden/unladen		km/h	11/12
Lifting speed, laden/unladen		m/s	0.29/0.36
Lowering speed, laden/unladen		m/s	0.4/0.43
Max. gradeability, laden/unladen		%	15/15
Drive motor rating S2 60 min		kW	8
Battery voltage/nominal capacity		V/Ah	80V100AH

EP EQUIPMENT CO.,LTD
www.ep-equipment.com

V2406.03

FEATURE

PMSM Technology on traction and lifting motor

Stable power output

10% runtime extended

10-15% energy saving




80V/100Ah Li-ion battery with 35A onboard charger

- Easy opportunity charging thanks to the onboard charger with plug
- Zero maintenance and no gas emission allow to recharge everywhere
- Covering the majority of the applications: from light to medium duty and occasional heavy duties



Easy operation experience

- Proportional lifting system for gentle and precise stacking
- Adjustable steering wheel, comfortable legroom and suspended seat
- Easy access to main components

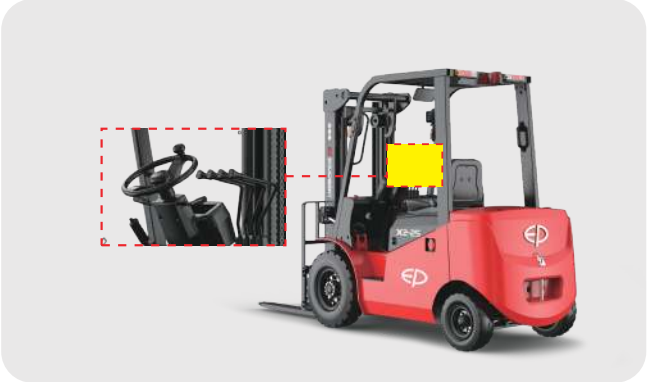

Both indoor and outdoor applications available

- Waterproof design
- Big tyres and high ground clearance



Key highlights

Perfect for online sales and rental

The EFL252X2 is designed around simplicity and cost-effectiveness, perfect for online channels, with zero maintenance and low initial costs needed.





Ideal alternative to IC trucks and second-hand trucks

The EFL252X2 is positioned as the most entry-level and budget-friendly Li-ion forklift. It can meet both indoor and outdoor demands thanks to its waterproof design and high ground clearance. To deal with strict environmental regulations, the lithium core produces zero carbon emission and complies with sustainability.







Li-ion Counterbalance Forklift Truck 2500kg

EFL252X2


Distinguishing mark	1.1	Manufacturer			EP
	1.2	Model designation			EFL252X2
	1.3	Drive			Electric
	1.4	Operator type			Seated
	1.5	Load capacity	Q	kg	2500
	1.6	Load center distance	c	mm	500
	1.8	Load distance，centre of drive axle to fork	x	mm	495
	1.9	Wheelbase	y	mm	1650
Service weight	2.1	Service weight		kg	4116
	2.2	Axle loading, laden front/rear		kg	5813/803
	2.3	Axle loading, unladen front/rear		kg	1805/2311
Tyres/chassis	3.1	Tyre type			Pneumatic
	3.2	Tyre size, front			7.00-12-16PR
	3.3	Tyre size, rear			18X7-8-14PR
	3.5	Wheels, number front/rear (x=drive wheels)		mm	2x/ 2
	3.6	Tread width, front	b_{10}	mm	975
	3.7	Tread width, rear	b_{11}	mm	955
Dimensions	4.1	Tilt of mast/fork carriage forward/backward	α/β	°	6/ 10
	4.2	Retracted mast height	h_1	mm	2090
	4.3	Free lift	h_2	mm	135
	4.4	Lift height	h_3	mm	3000
	4.5	Height, mast extended	h_4	mm	4025
	4.7	Height of overhead guard (cabin)	h_6	mm	2170
	4.8	Seat height/standing height	h_7	mm	1110
	4.12	Tow coupling height	h_{10}	mm	295
	4.19	Overall length	l_1	mm	3598
	4.20	Length to face of forks	l_2	mm	2528
	4.21	Overall width	b_1/b_2	mm	1154
	4.22	Fork dimensions	s×e×l	mm	40×122×1070
	4.23	A,B Fork carriage class/type A, B			2A
	4.24	Fork carriage width	b_3	mm	1040
	4.31	Ground clearance, laden, below mast	m_1	mm	120
	4.32	Ground clearance, center of wheelbase	m_2	mm	150
	4.34.1	Aisle width for pallets 1000×1200 crossways	Ast	mm	3953
	4.34.2	Aisle width for pallets 800×1200 lengthways	Ast	mm	4153
	4.35	Turning radius	Wa	mm	2258
Performance data	5.1	Travel speed, laden/unladen		km/h	11/12
	5.2	Lifting speed, laden/unladen		m/s	0.29/0.36
	5.3	Lowering speed, laden/unladen		m/s	0.4/0.43
	5.8	Max. gradeability, laden/unladen		%	15/15
	5.10	Service brake			Hydraulic
	5.11	Parking brake			Mechanical
Electric-engine	6.1	Drive motor rating S2 60 min		kW	8
	6.2	Lift motor rating at S3 15%		kW	16
	6.4	Battery voltage/nominal capacity		V/Ah	80V100AH
Addition data	8.1	Type of drive control			PSMS
	10.5	Steering design			Hydraulic
	10.7	Sound pressure level at the driver's ear		dB(A)	< 74

If there are improvements of technical parameters or configurations, no further notice will be given.
The diagram shown may contain non-standard configurations.

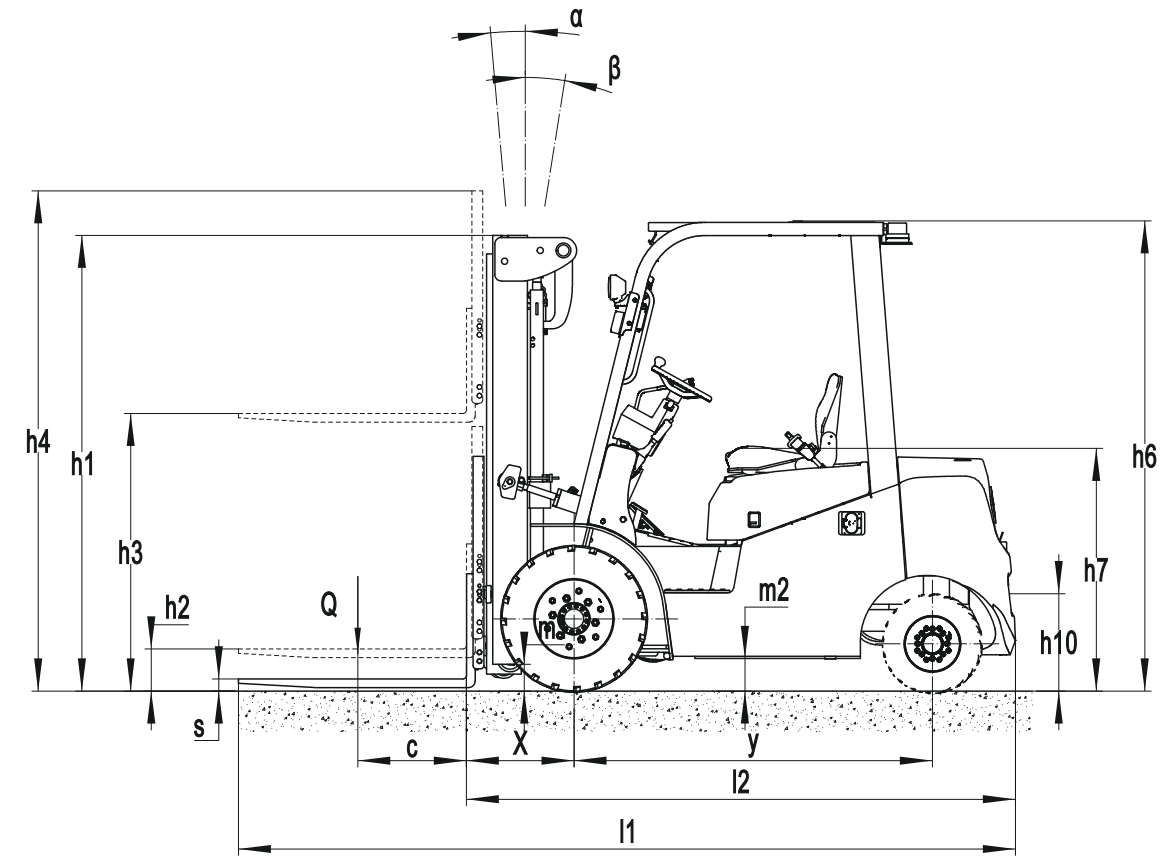
α
β
h4
h1
h3
h2
s
Q
m
m2
h6
h7
h10
c
X
y
l2
l1

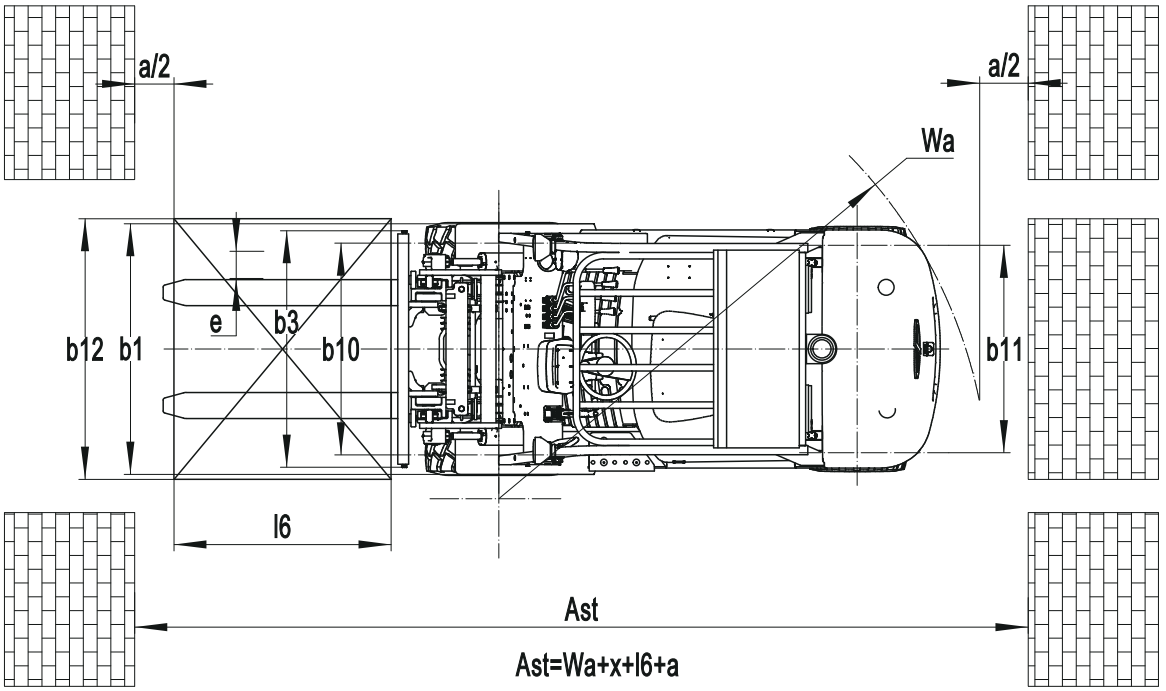
a/2
a/2
Wa
b12
b1
e
b3
b10
b11
l6
Ast
Ast=Wa+x+l6+a

RATED CAPACITIES AND LOAD CENTERES GRAPH

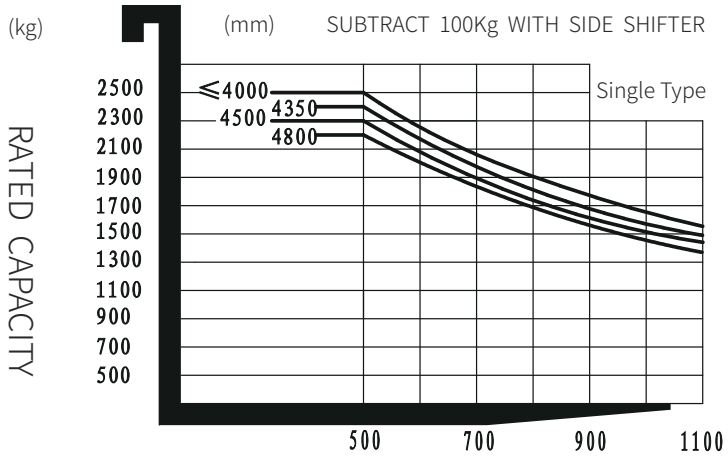

Mast Option

Mast types	Lift height (h3)	Height, Mast			Height,Free lift(h2)	
		Height, mast lowered(h1)	Height, mast extended(h4)		No shelving	With shelving
			No shelving	With shelving		
	mm	mm	mm	mm	mm	mm
2-Standard Mast	3000	2090	3565	4025	120	120
	3300	2240	3865	4325	120	120
3-Free Mast	4500	2115	5065	5525	1550	1090
	4800	2220	5365	5825	1655	1195



Option

Optional items	EFL252X2
Fork dimension	●122*45*1070○122*45*1150○122*45*1220○122*45*1370 ○122*45*1520○122*45*1600○122*45*1700○122*45*1820 ○122*45*2000○122*45*2200○122*45*2400
Fork carriage width	●1040mm
backrest height	●1095mm
Front wheel material	●Pneumatic○Normal solid○Traceless solid
Rear wheel material	●Pneumatic○Normal solid○Traceless solid
Battery capacity	●80V100AH○80V150AH○80V230AH○80V280AH
Charger	○80V65A（External）●80V35A (Internal）○80V60A (internal） ○80V100A（External,only for 80V230AH battery）
Battery indicator	●With time
Seat type	●ordinary○Suspension + safety belt logic switch ○comfortable + safety belt logic switch
Attachments	●No○Built-in sideshifter○External shifter
Traction pin	●Yes and not customized
Anti-static chain	●Yes and not customized
Front lamp	●LED
Rear lamp	●No○LED
Warning lamp	●Yes and not customized
Turn signal light	●LED
Blue lamp	●None○The first one+ the last one○The latter one ○The first two + the last one
Area warning lamp	●None○Red, one on each side ○One on each side + one on the back
Rearview mirror	●A rearview mirror○Double rearview mirror
Buzzer	●Yes and not customized
OPS system	●Yes and not customized○No
USB interface	●Yes and not customized
Telematics	●Yes and not customized○No
Fan heater	●No○Yes and not customized
Speed reduction for elevated mast- Australian standard	●No○Yes and customized
Cabin	●None○Semi-enclosed cockpit ○Fully enclosed cockpit with electric fan, heater, front wipers, rear wipers
Proportional lift system	●Yes and not customized
Overhead guard	●Standard overhead guard○Yes and customizable
Note： ●Standard ○ Optional - Inconformity	