



# XT30U(2+2) Product Specification

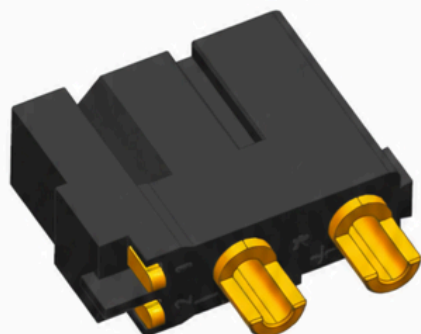

## XT30U(2+2)-F Product

1. This series of products is 180° right-angle surface-mount 2+2PIN connectors, which are currently the standard power connectors for lithium battery power plugs, and can be mated with XT30(2+2)PB-M, panel-mount XT30(2+2)PW-M.
2. Can be used for connection scenarios such as lithium batteries and controller power leads to the board.

## XT30U (2+2) -F.G.B

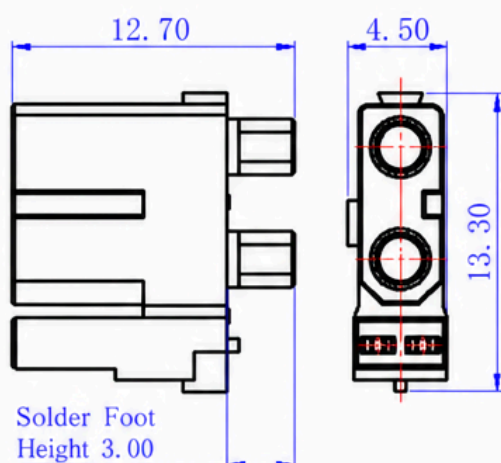

| Electrical Characteristics                                      |                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated Current                                                   | 20A MAX (16AWG/ $\Delta < 85^{\circ}\text{C}$ );<br>Signal Pin: 1A                                                                                                                                                                                                                                                                                                                                              |
| Rated Voltage                                                   | 600V DC                                                                                                                                                                                                                                                                                                                                                                                                         |
| Insulation Resistance                                           | $\geq 2000\text{M}\Omega$                                                                                                                                                                                                                                                                                                                                                                                       |
| Contact Resistance                                              | $\leq 1.2\text{m}\Omega$                                                                                                                                                                                                                                                                                                                                                                                        |
| Mechanical Characteristics                                      |                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Durability                                                      | $\geq 100$ Cycles                                                                                                                                                                                                                                                                                                                                                                                               |
| Salt Spray                                                      | 48h                                                                                                                                                                                                                                                                                                                                                                                                             |
| Pull-out Force                                                  | $\geq 1.2$                                                                                                                                                                                                                                                                                                                                                                                                      |
| Environmental Characteristics                                   |                                                                                                                                                                                                                                                                                                                                                                                                                 |
| IP Rating                                                       | IP40                                                                                                                                                                                                                                                                                                                                                                                                            |
| Operating Temperature                                           | $-20^{\circ}\text{C}$ to $120^{\circ}\text{C}$                                                                                                                                                                                                                                                                                                                                                                  |
| Flammability Rating                                             | UL94 V-0 (Wall Thickness 0.8mm)                                                                                                                                                                                                                                                                                                                                                                                 |
| Materials                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Housing                                                         | PA, Color: Black                                                                                                                                                                                                                                                                                                                                                                                                |
| Contact                                                         | Copper Alloy, Plated: Gold                                                                                                                                                                                                                                                                                                                                                                                      |
| <br>In use, do not exceed the specified current and voltage.    | <ul style="list-style-type: none"> <li>● Overcurrent and overvoltage may cause malfunction or accidents.</li> <li>● In the event of a short circuit, the connector may generate high heat, leading to malfunction or accidents. Therefore, do not insert or remove connectors when the circuit is live.</li> </ul>                                                                                              |
| <br>Do not use if the connector is subjected to external force. | <ul style="list-style-type: none"> <li>● Do not use the connector if an external force beyond the permissible limit is applied to the connector or lead. Doing so may cause damage resulting in malfunction or accidents.</li> <li>● Connectors are designed for connection in accordance with electrical connection principles. Therefore, do not use them as structural components of the housing.</li> </ul> |
| <br>Do not use in harsh environments.                           | <ul style="list-style-type: none"> <li>● Do not use in harsh environments such as corrosive gases, high temperatures, or high humidity.</li> <li>● Do not use outdoors or in environments not specified in the specification, as this may cause malfunction. Please use within the specified environmental conditions.</li> </ul>                                                                               |
| <br>Handle with care.                                           | <ul style="list-style-type: none"> <li>● Connectors are precision components, please handle with care.</li> <li>● When unpacking, be careful not to drop or apply strong impact to the packaged product. Dropping or applying strong impact may cause terminal deformation, bending, detachment, and other abnormalities.</li> </ul>                                                                            |