

# VELVET Light 1 IP54

Ref.: VL1IP54

Datasheet: November 2021 / Page 1



## 1x1 foot bicolor weatherproof soft light LED panels

[Click here for more product information](#)

1. XLR-3 DC IN
2. Power switch
3.  $\pm$  Adjustment buttons
4. 3200K/ 5600K Quick access button
5. Mode selection button (Dimmer/ Colour Temp)
6. Digital display
7. XLR-5 DMX In&Out



# VELVET Light 1 IP54

Ref.: VL1IP54


Datasheet: November 2021 / Page 2




## SPECIFICATIONS

COLOUR TEMPERATURE	Adjustable from 2700K a 6500K (100K increments)
LIGHT INTENSITY	Dimmable 0 to 100 (smooth and flicker-free)
LOCAL CONTROL	Shock proof buttons and display
WIRE CONTROL	DMX DMX-RDM with XLR-5 IN connector
TLCI INDEX	98 at 3200K and 97 at 5600K
PHOTOMETRICS	2000 lux / 185 fc at 1m / 3 feet 250 lux / 23 fc at 3m / 10 feet
BEAM ANGLE	100°
DIMENSIONS	370x308x68mm / 14.5"x12"x2.7" (panel) 485x395x68mm / 19.1"x15.5"x2.7" (panel + yoke)
WEIGHT	3.5 kg / 7.7 lbs (panel) 4 kg / 8.8 lbs (panel + yoke)
POWER DRAW	75W
POWER SUPPLY	12-35V DC V-Lock or Gold mount battery plate 90-264V AC 50/60Hz
LED RATED LIFE	More than 50.000 hours L70 More than 35.000 hours L80
POWER CONNECTION	Neutrik XLR-3 DC In connector
OUTPUT FREQUENCY	2000 fps
OPERATION TEMPERATURE	From -20°C to +40°C
COOLING	No-noise, fan-free passive cooling
PROTECTION	IP54 rainproof, indoor or outdoor use
VELVET LED TECHNOLOGY	Selected BIN LED + optic diffuser + CPU software control
RIGGING OPTIONS	Aluminum yoke with 16 female combined with 28 pin, quick link swivel ball head, pole operated yoke, multipanels yokes
QUICK MOUNTING ACCESSORIES	AC power supply, Vlock or Gold adapter, DMX 512 splitter cable in&out, foldable Snapgrid, removable barn doors, cordura case, hard case
CONSTRUCTION & FINISH	Black anodized extruded aluminum and black powder coated sheet aluminum

### VELVET Light 1 IP54 + M0 Yoke

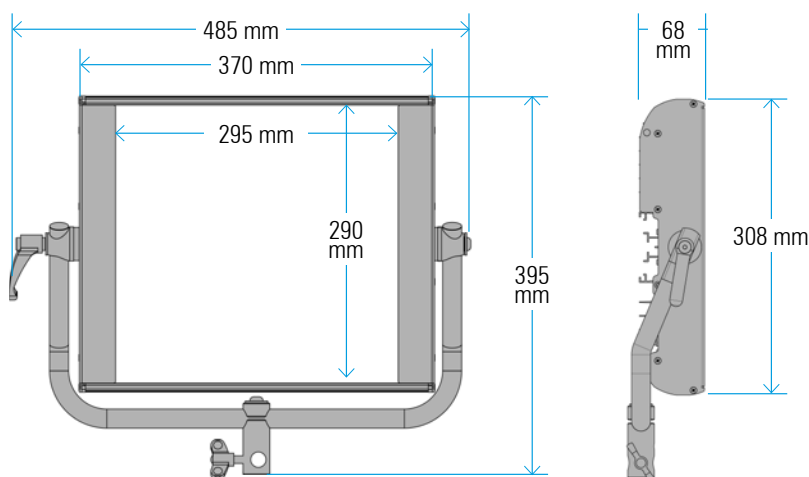

### VELVET Light 1 IP54 + PO Yoke

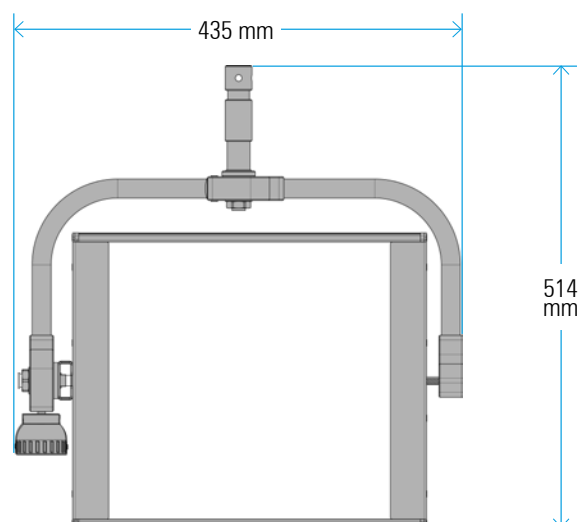




# VELVET Light 1 IP54

Ref.: VL1IP54


Datasheet: November 2021 / Page 3



## PHOTOMETRICS

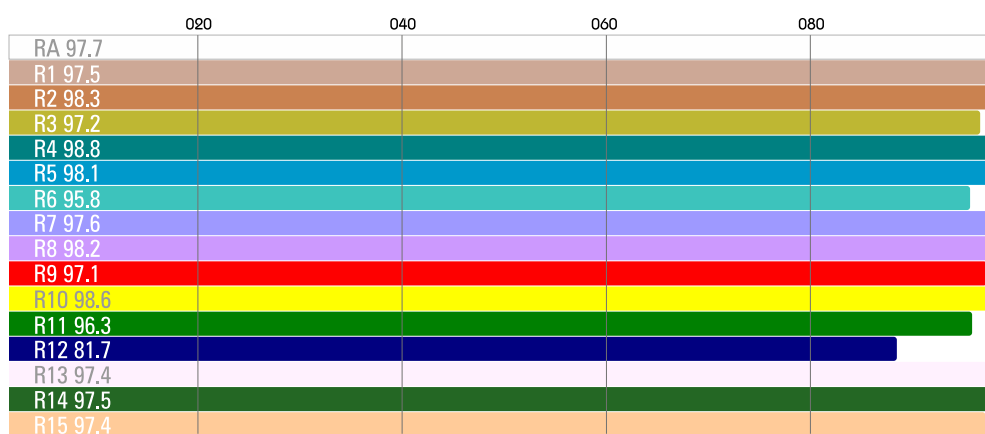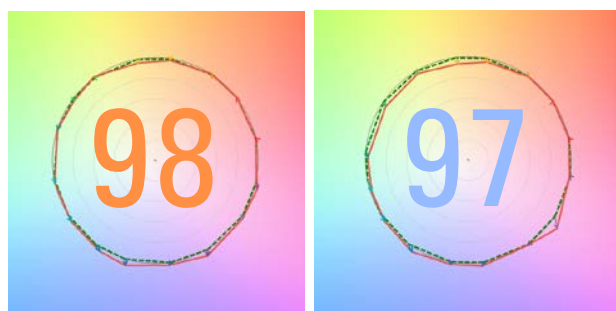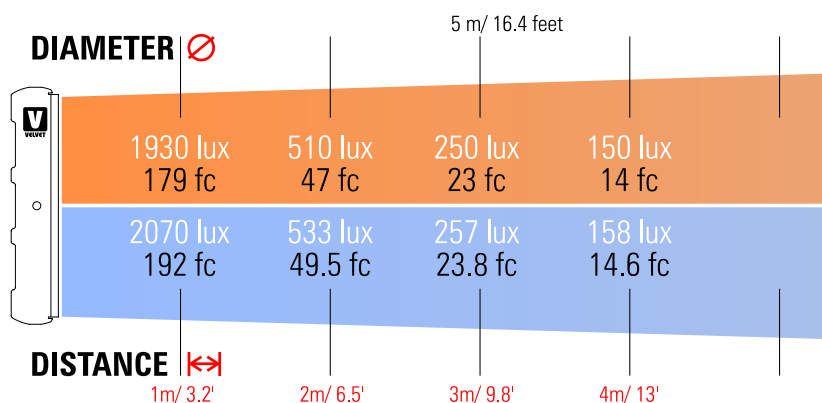

## CCT 3270K

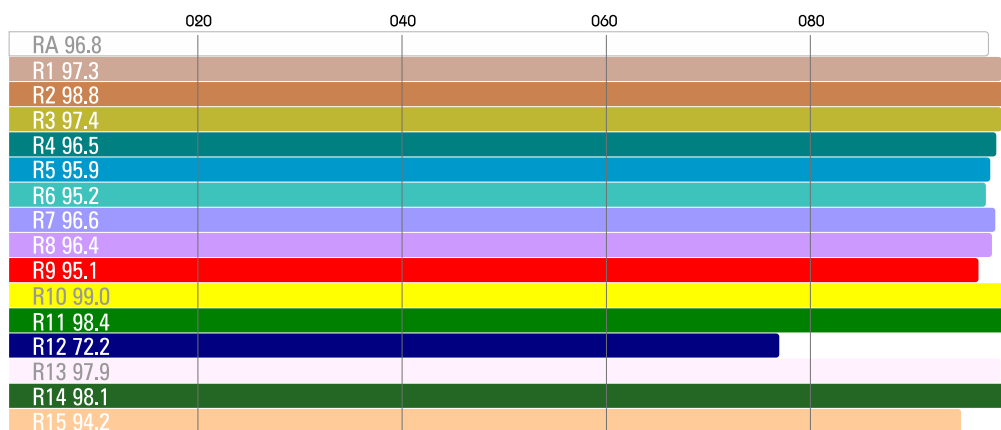

## CCT 5740K

# VELVET Light 1 IP54

Ref.: VL1IP54

Datasheet: November 2021 / Page 4



## ACCESSORIES

### POWER SUPPLY



VL-PSU120W



VLIP54-PSU120W



VL1-VLOCK



VL1-GOLD

### BEAM CONTROL



VL1-RB



VL1-SG



VL1-SB



VL1-SGXSB

### TRANSPORT



VL1-BAG



VL1-DBAG



VL1-TBAG



VL1-CASE

### REMOTE CONTROL



VL-RC