Ref.: VL2IP54

Datasheet: November 2021 / Page 1



2x1 feet bicolor weatherproof, IP54 soft light LED panel

Click here for more product information



Ref.: VL2IP54


Datasheet: November 2021 / Page 2



SPECIFICATIONS	
COLOUR TEMPERATURE	Adjustable from 2700K to 6500K (100K increments)
LIGHT INTENSITY	Dimmable 0 to 100 (smooth and flicker-free)
LOCAL CONTROL	Shock proof buttons and display
WIRE CONTROL	DMX-RDM with XLR-5 In & Out connectors
TLCI INDEX	96 at 3200K and 96 at 5600K
PHOTOMETRICS	4000 lux / 370 fc at 1m / 3 feet 580 lux / 53 fc at 3m / 10 feet
BEAM ANGLE	100°
DIMENSIONS	670x308x68mm / 26.4"x12"x2.7" (panel) 770x435x68mm / 30.3"x17.1"x2.7" (panel + yoke)
WEIGHT	5.9 kg / 13 lbs (panel) 6.5 kg / 14.3 lbs (panel + yoke)
POWER DRAW	150W
POWER SUPPLY	24-35V DC V-Lock or Gold mount battery plate 90-264V AC 50/60Hz
LED RATED LIFE	More than 50.000 hours L70 More than 35.000 hours L80
POWER CONNECTION	Neutrik XLR-3 DC In connector
OUTPUT FREQUENCY	2000 fps
OPERATION TEMPERATURE	From -20°C to +40°C
COOLING	No-noise, fan-free passive cooling
PROTECTION	IP54 rainproof, indoor or outdoor use
VELVET LED TECHNOLOGY	Selected BIN LED + optic diffuser + CPU software control
RIGGING OPTIONS	Aluminum yoke with 16 female combined with 28 pin, quick link swivel ball head, pole operated yoke, multipanels yokes
QUICK MOUNTING ACCESSORIES	AC power supply, Vlock or Gold adapter, DMX 512 splitter cable infout, foldable Snapgrid, removable barn doors, cordura case, hard case
CONSTRUCTION & FINISH	Black anodized extruded aluminum and black powder coated sheet aluminum

VELVET Light 2 IP54+M0 Yoke


VELVET Light 2 IP54 +P0 Yoke

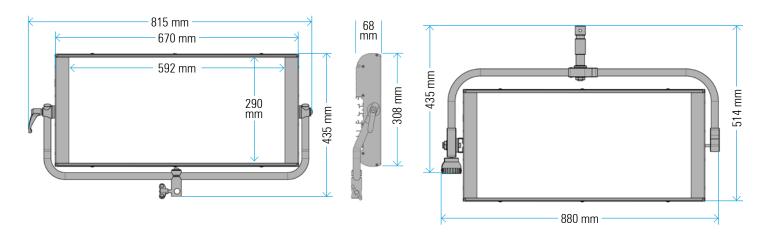

Ref.: VL2IP54

Datasheet: November 2021 / Page 3



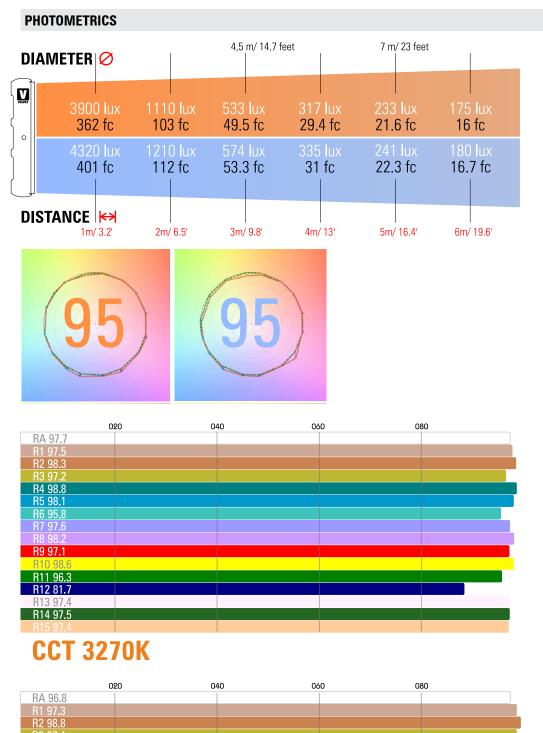



CCT 5740K

Ref.: VL2IP54

Datasheet: November 2021 / Page 4



VL2-SGXSB

ACCESSORIES

VL2-SG60

POWER SUPPLY BATTERY ADAPTERS VL2-GOLD VL-PSU180W VL2-VLOCK VLIP54-PSU180W **BEAM CONTROL**



VL2-SB **TRANSPORT RIGGING REMOTE CONTROL**

