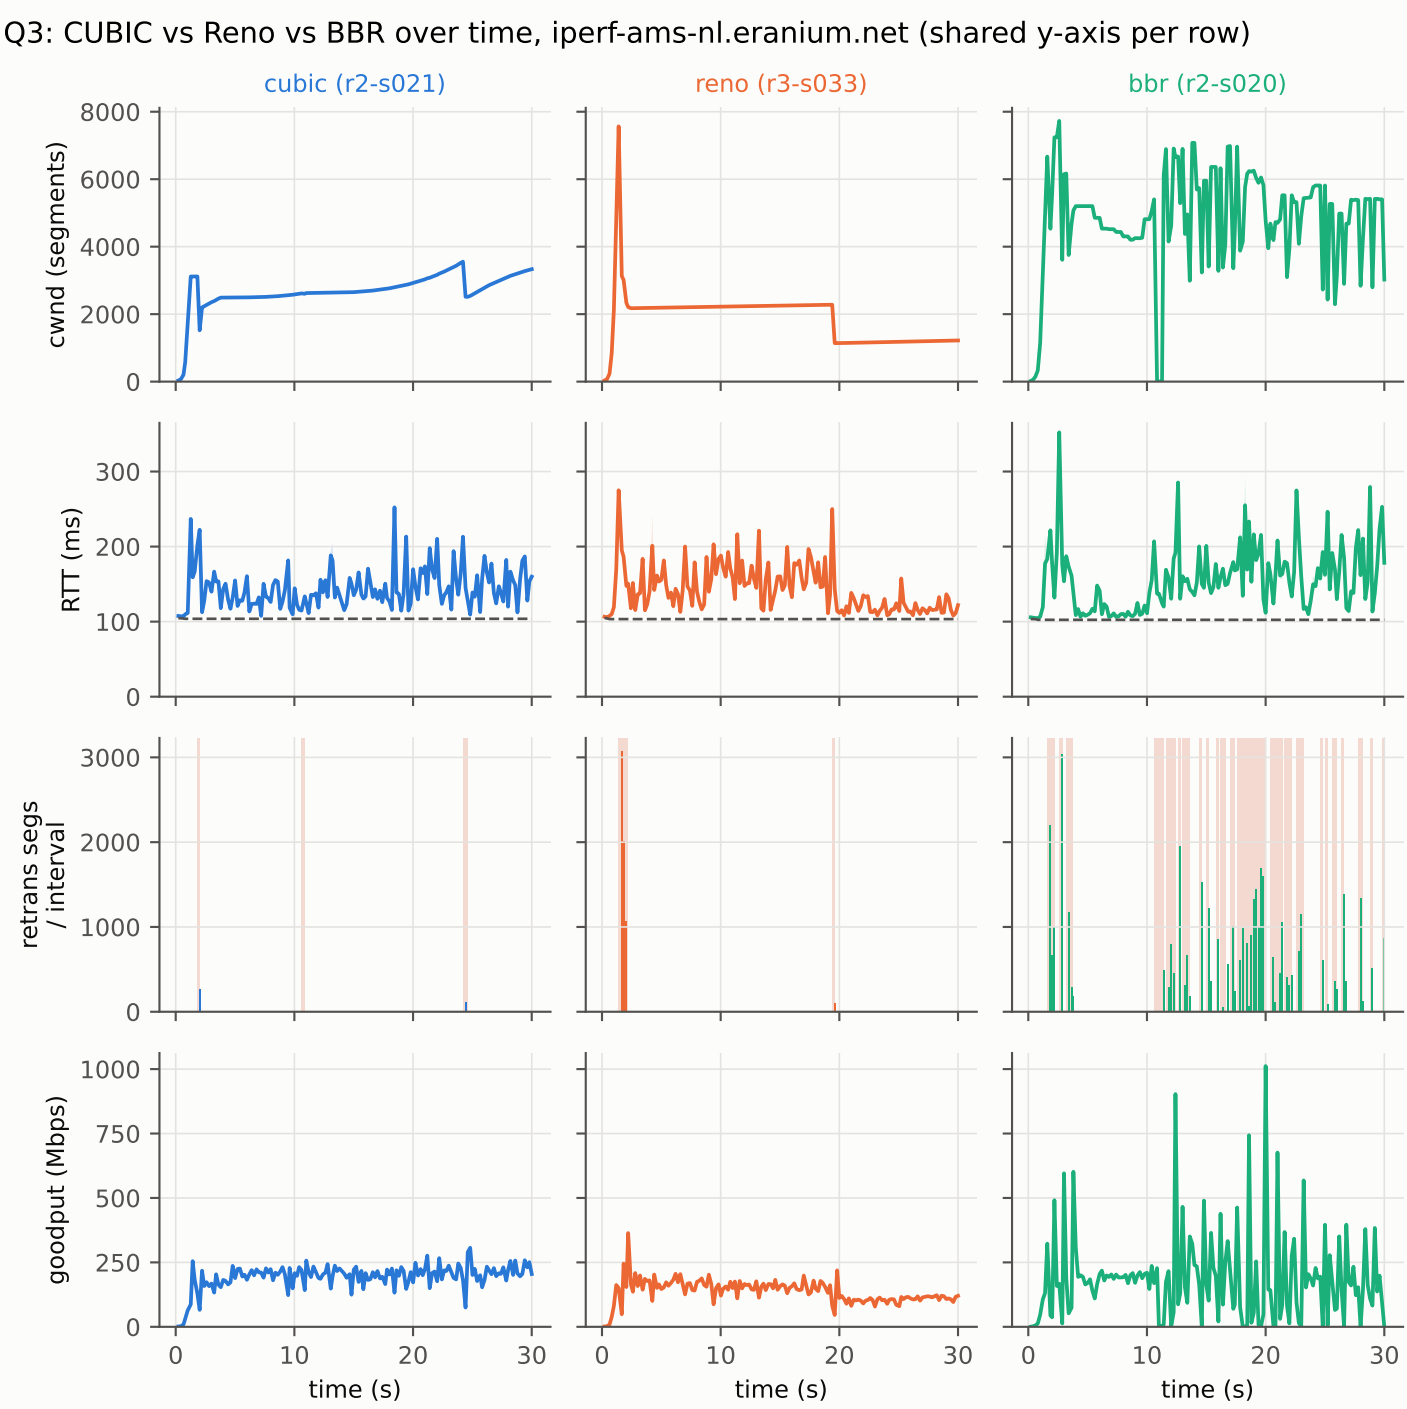
Q3: CUBIC vs Reno vs BBR over time, iperf-ams-nl.eranium.net (shared y-axis per row)
cubic (r2-s021)
reno (r3-s033)
bbr (r2-s020)
cwnd (segments)
RTT (ms)
retrans segs / interval
goodput (Mbps)
time (s)
time (s)
time (s)