Project: Worked examples
Title: Weld group (elastic line method)
Status: DRAFT · Author: TempestOS (2026-10-23) · Checker: — (—) · Issued: —

1. Scope and method

Calculates the force per unit length at every end of a fillet weld group, the throat stress and the leg size required. It covers one leg size, with in-plane forces and torque, an out-of-plane force and moments.

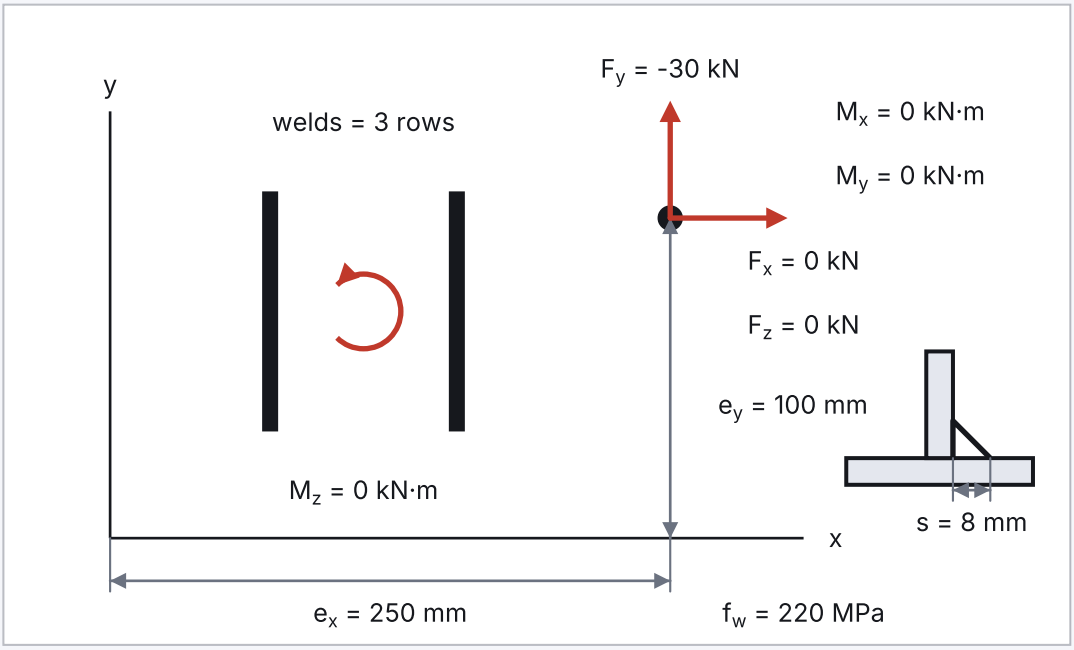


Figure 1 — A fillet-weld group in plan (two lines drawn; the welds as listed), x and y from one origin, under forces and moments at (e_x, e_y), + as drawn; beside it, the weld section with leg s. Not to scale; the labels are the inputs as entered.

WHAT IT CALCULATES	RELATION
Welds as lines of unit throat	$L_w = \Sigma\, l$, centroid $x_c = \Sigma\, l{\cdot}x_m / L_w$
Unit second moments	$I_{ux} = \Sigma\,[I(y_m - y_c)^2 + I{\cdot}\Delta y^2/12]$, I_{uy} likewise, product $I_{uxy} = \Sigma\,[I(x_m - x_c)(y_m - y_c) + I{\cdot}\Delta x{\cdot}\Delta y/12]$, $J_u = I_{ux} + I_{uy}$
Torsion about the centroid	$T = F_y(e_x - x_c) - F_x(e_y - y_c) + M_z$
At each weld end	direct F/L_w, torsional $T{\cdot}r/J_u$ (perpendicular to r), out-of-plane $F_z/L_w + [(M_x{\cdot}I_{uy} - M_y{\cdot}I_{uxy}){\cdot}y' + (M_y{\cdot}I_{ux} - M_x{\cdot}I_{uxy}){\cdot}x']/(I_{ux}{\cdot}I_{uy} - I_{uxy}^2)$ with F_z's eccentricity added to M_x and M_y (this reduces to $M_x{\cdot}y'/I_{ux} + M_y{\cdot}x'/I_{uy}$ only for a group symmetric about a centroidal axis); vector sum f_r
Throat and weld stress	$a = 0.707{\cdot}s$, $\tau = f_{r,max}/a$; required leg $s_{req} = f_{r,max}/(0.707{\cdot}f_w)$

Basis: Welds treated as lines: torsional and bending properties[1](Ch. 9, Tables 9-1 and 9-2, 11th ed.); Treating the weld as a line[2](§7.4, 1st ed. (1966)); Simplified method for design resistance of fillet welds (resistance input)[3](cl. 4.5.3.3).

2. Inputs

SYMBOL	DESCRIPTION	VALUE	UNIT	SOURCE	VALID RANGE
welds	Weld lines	3 row(s)		drawing: BRK-010 rev A	any
s	Fillet leg	8	mm	drawing: BRK-010 rev A	3 … 20 mm
f_w	Design strength of the throat	220	MPa	assumption: S275, EN 1993-1-8 simplified method: 410/√3/(0.85 × 1.25) ≈ 223 MPa, rounded down.	50 … 600 MPa
F_x	In-plane force, x	0	kN	assumption: No horizontal load.	-10000 … 10000 kN
F_y	In-plane force, y	-30	kN	spec: Hoist rating with dynamic factor	-10000 … 10000 kN
F_z	Out-of-plane force (tension positive)	0	kN	assumption: No out-of-plane load.	-10000 … 10000 kN
e_x	Point of application, x	250	mm	drawing: BRK-010 rev A	-5000 … 5000 mm
e_y	Point of application, y	100	mm	drawing: BRK-010 rev A	-5000 … 5000 mm
M_x	Out-of-plane moment about x (tension on +y side)	0	kN·m	assumption: None.	-10000 … 10000 kN·m
M_y	Out-of-plane moment about y (tension on +x side)	0	kN·m	assumption: None.	-10000 … 10000 kN·m
M_z	Additional in-plane torque	0	kN·m	assumption: None.	-10000 … 10000 kN·m

TABLE ROW	VALUES
welds[1]	x1 = 0 mm; y1 = 0 mm; x2 = 80 mm; y2 = 0 mm
welds[2]	x1 = 0 mm; y1 = 0 mm; x2 = 0 mm; y2 = 200 mm
welds[3]	x1 = 0 mm; y1 = 200 mm; x2 = 80 mm; y2 = 200 mm

3. Assumptions

A1. The load is static, the weld is elastic and the connected parts are rigid. (Conservative against the instantaneous-centre method.)
A2. The weld stress varies linearly with distance from the centroid. (The elastic line method.)
A3. The welds are fillet welds of one leg size, and the throat is 0.707·s. (Equal-leg fillet.)
A4. The design strength of the throat comes from EN 1993-1-8 (simplified method) or a user allowable with its source. (No resistance table ships.)
A5. f_w (Design strength of the throat) is taken as 220 MPa. (S275, EN 1993-1-8 simplified method: 410/√3/(0.85 × 1.25) ≈ 223 MPa, rounded down.)
A6. F_x (In-plane force, x) is taken as 0 kN. (No horizontal load.)
A7. F_z (Out-of-plane force (tension positive)) is taken as 0 kN. (No out-of-plane load.)

A8. M_x (Out-of-plane moment about x (tension on +y side)) is taken as 0 kN·m. (None.)
A9. M_y (Out-of-plane moment about y (tension on +x side)) is taken as 0 kN·m. (None.)
A10. M_z (Additional in-plane torque) is taken as 0 kN·m. (None.)

4. Working

[11] $L_w = \Sigma\ l$
$= 80 + 200 + 80$
$= 360\ mm$
Total weld length

[12] $x_c = \Sigma\ l \cdot x_m\ /\ L_w$
$= 17.778\ mm$
$= 17.778\ mm$
Centroid x

[13] $y_c = \Sigma\ l \cdot y_m\ /\ L_w$
$= 100\ mm$
$= 100\ mm$
Centroid y

[14] $I_{ux} = \Sigma\ [l(y_m - y_c)^2 + l \cdot \Delta y^2/12]$ [1](Table 9-2)
$=$ about the centroid
$= 2266700\ mm^3$
Unit second moment about x

[15] $I_{uy} = \Sigma\ [l(x_m - x_c)^2 + l \cdot \Delta x^2/12]$ [1](Table 9-2)
$=$ about the centroid
$= 227560\ mm^3$
Unit second moment about y

[16] $I_{uxy} = \Sigma\ [l(x_m - x_c)(y_m - y_c) + l \cdot \Delta x \cdot \Delta y/12]$ [1](Table 9-2)
$=$ about the centroid
$= 0\ mm^3$
Unit product moment

[17] $J_u = I_{ux} + I_{uy}$ [1](Table 9-1)
$= 2266700 + 227560$
$= 2494200\ mm^3$
Unit polar moment

[18] $T = F_y(e_x - x_c) - F_x(e_y - y_c) + M_z$
$= -30 \times 232.22 - 0 \times 0 + 0e3$
$= -6.9667\ kN·m$
In-plane torque about the centroid

[19] $f_{r,max}$ = max over weld ends $\sqrt{(f_x^2 + f_y^2 + f_z^2)}$
$=$ at (80, 0) mm: (-279.31, -257.13, 0) N/mm
$= 379.64\ N/mm$
Maximum resultant force per unit length

[20] critical = critical point
$=$ (80, 0) mm
$=$ "(80, 0) mm"
Where f_r is greatest

[21] $a = 0.707 * s$
$= 0.707 \times 8\ mm$
$= 5.656\ mm$
Throat

[22] $\tau = f_{r,max}\ /\ a$
$= 379.64\ N/mm\ /\ 5.656\ mm$
$= 67.122\ MPa$
Maximum throat stress

[23] $s_{req} = f_{r,max} / (0.707 * f_w)$
= 379.64 N/mm / (0.707 × 220 MPa)
= 2.4408 mm
Leg size required
[24] $u = \tau / f_w$
= 67.122 MPa / 220 MPa
= 0.3051
Utilisation

5. Results

SYMBOL	VALUE	DESCRIPTION
$f_{r,max}$	379.6 N/mm	Maximum force per unit length
τ	67.12 MPa	Throat stress (governing)
s_{req}	2.441 mm	Leg required
L_w	360 mm	Weld length
x_c	17.78 mm	Centroid x
y_c	100 mm	Centroid y
I_{ux}	2266667 mm³	Unit second moment about x
I_{uy}	227556 mm³	Unit second moment about y
I_{uxy}	0 mm³	Unit product moment
J_u	2494222 mm³	Unit polar moment
T	-6.967 kN·m	Torque about the centroid
critical	"(80, 0) mm"	Critical point
a	5.656 mm	Throat
u	0.31	Utilisation

6. Checks (governing first)

RESULT	CHECK	DEMAND	CAPACITY	UTILISATION	REF
PASS	Throat stress against design strength	67.12 MPa	220 MPa	0.31	[3](cl. 4.5.3.3)

7. Applicability

None.

8. Verification

Template mech.weld-group@1.3.0 Content hash 06875b1ca05c2395 Engine calc-engine/1.0.0
Known-answer cases passed 4/4 Test run 2026-10-23 12:00 UTC TempestOS 0.26.0

9. References

1. Budynas RG, Nisbett JK. Shigley's Mechanical Engineering Design. 11th ed. McGraw-Hill Education; 2020.
2. Blodgett, Design of Welded Structures.
3. British Standards Institution. Eurocode 3: Design of Steel Structures—Part 1-8: Design of Joints. BS EN 1993-1-8:2005. BSI; 2005.