Project: Worked examples
Title: Shaft under combined bending and torsion
Status: DRAFT · Author: TempestOS (2026-10-23) · Checker: — (—) · Issued: —

1. Scope and method

Bending and torsional stresses in a solid round shaft with stress-concentration factors, the maximum shear (Tresca) and von Mises equivalent stresses, and the factors of safety against yield, against a required factor.

WHAT IT CALCULATES	RELATION
Bending stress, with its stress concentration	$\sigma = K_t \cdot 32M/(\pi d^3)$
Torsional shear stress, with its stress concentration	$\tau = K_{ts} \cdot 16T/(\pi d^3)$
Maximum shear stress (Tresca)	$\tau_{max} = \sqrt{((\sigma/2)^2 + \tau^2)}$
von Mises equivalent stress	$\sigma' = \sqrt{(\sigma^2 + 3\tau^2)}$
Factors of safety against yield, the lower governing	$n_T = (S_y/2)/\tau_{max}$; $n_{VM} = S_y/\sigma'$

Basis: Maximum-shear-stress and distortion-energy theories[1](§5-4, §5-5); Shaft design for stress[1](§7-4).

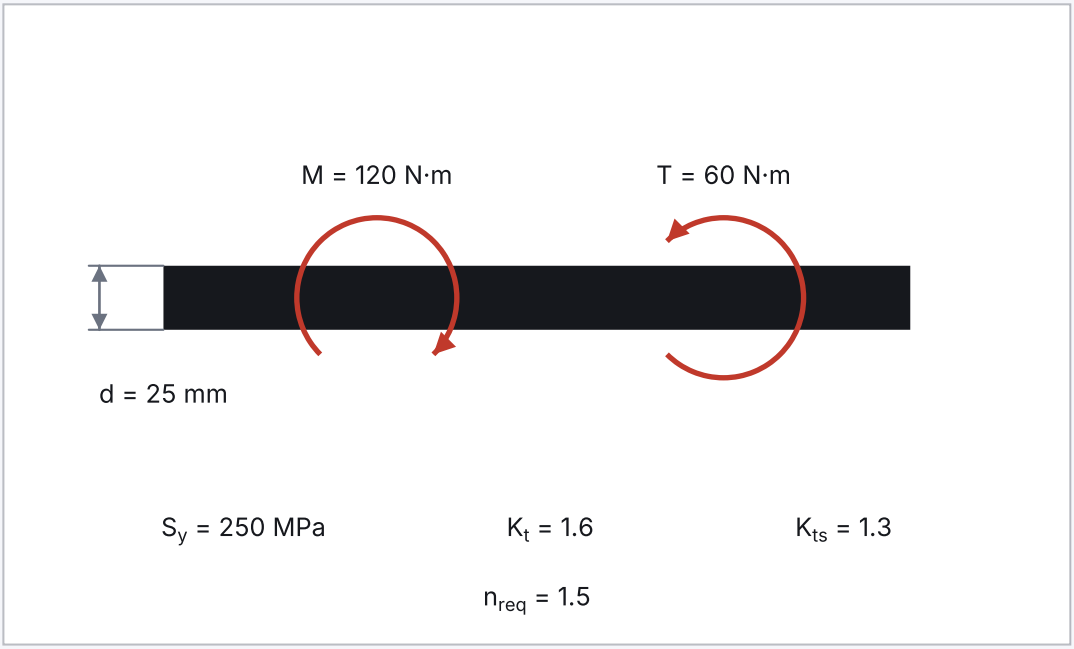


Figure 1 — A solid round shaft under bending and torsion at the section. Not to scale; the labels are the inputs as entered.

2. Inputs

SYMBOL	DESCRIPTION	VALUE	UNIT	SOURCE	VALID RANGE
d	Shaft diameter	25	mm	drawing: DRG-SH-402 rev A	1 … 2000 mm
M	Bending moment (magnitude)	120	N·m	spec: LOAD-SCHEDULE-01	0 … 10000000 N·m

SYMBOL	DESCRIPTION	VALUE	UNIT	SOURCE	VALID RANGE
T	Torque (magnitude)	60	N·m	spec: LOAD-SCHEDULE-01	0 … 10000000 N·m
S_y	Yield strength	250	MPa	drawing: DRG-SH-402 rev A	50 … 3000 MPa
K_t	Bending stress-concentration factor (1 for none)	1.6		spec: SPEC-MECH-03 design criteria	1 … 5
K_{ts}	Torsional stress-concentration factor (1 for none)	1.3		spec: SPEC-MECH-03 design criteria	1 … 5
n_{req}	Required factor of safety	1.5		spec: SPEC-MECH-03 design criteria	1 … 10

3. Assumptions

A1. Solid round section, linear elastic; static loading. (Fatigue is mech.fatigue-miner's job; hollow shafts are not covered.)

4. Working

[8] $\sigma = K_t * 32 * M / (pi * d^3)$ [1](§7-4)

$= 1.6 \times 32 \times 120\ N\cdot m / (\pi \times (25\ mm)^3)$

$= 125.16\ MPa$

Bending stress

[9] $\tau = K_{ts} * 16 * T / (pi * d^3)$ [1](§7-4)

$= 1.3 \times 16 \times 60\ N\cdot m / (\pi \times (25\ mm)^3)$

$= 25.424\ MPa$

Torsional shear stress

[10] $\tau_{max} = sqrt((\sigma / 2)^2 + \tau^2)$ [1](§5-4)

$= sqrt((125.16\ MPa / 2)^2 + (25.424\ MPa)^2)$

$= 67.549\ MPa$

Maximum shear stress (Tresca)

[11] $\sigma_{vm} = sqrt(\sigma^2 + 3 * \tau^2)$ [1](§5-5)

$= sqrt((125.16\ MPa)^2 + 3 \times (25.424\ MPa)^2)$

$= 132.68\ MPa$

von Mises stress

[12] $n_T = (S_y / 2) / \tau_{max}$

$= 250\ MPa / 2 / 67.549\ MPa$

$= 1.8505$

Factor of safety, maximum shear stress

[13] $n_{VM} = S_y / \sigma_{vm}$

$= 250\ MPa / 132.68\ MPa$

$= 1.8842$

Factor of safety, distortion energy

[14] $n_{min} = min(n_T, n_{VM})$

$= min(1.8505, 1.8842)$

$= 1.8505$

Governing factor of safety

[15] $u = n_{req} / n_{min}$

$= 1.5 / 1.8505$

$= 0.81059$

Required over governing factor of safety

5. Results

SYMBOL	VALUE	DESCRIPTION
σ	125.16 MPa	Bending stress
τ	25.424 MPa	Torsional shear
τ_{max}	67.549 MPa	Maximum shear stress
σ_{vm}	132.68 MPa	von Mises stress
n_T	1.8505	Factor of safety (Tresca)
n_{VM}	1.8842	Factor of safety (von Mises)
n_{min}	1.8505	Governing factor of safety

6. Checks (governing first)

RESULT	CHECK	DEMAND	CAPACITY	UTILISATION	REF
PASS	Factor of safety against the required factor	u = 0.81059	u ≤ 1	0.811	[1](§7-4)

7. Applicability

No warnings.

8. Verification

Template mech.shaft-stress@1.0.1 Content hash 4da066e367477095 Engine calc-engine/1.0.0
Known-answer cases passed 3/3 Test run 2026-10-23 12:00 UTC TempestOS 0.26.0

9. References

1. Budynas RG, Nisbett JK. Shigley's Mechanical Engineering Design. 11th ed. McGraw-Hill Education; 2020.