

ASSIGNMENT DAY 5

M T W T F S S						
Page No.:				YOUVA		
Date:						

1) List all the main components you find inside a desktop PC after opening the cabinet, & write a short description.

- Motherboard: The main circuit board that connects all parts together & lets them talk to each other.

CPU: The "brain" of the computer that performs all calculation & executes commands.

Heat sink: A fan or cooling system attached to the processor to keep it from overheating.

RAM: The short-term memory that holds data currently in use so the computer runs smoothly.

SSD: The long-term memory where your operating system, files, apps & games are permanently saved.

GPU: A dedicated card responsible for rendering video, images & 3D graphics on the screen.

2) Take a clear photo of each step as you disassemble a desktop PC, & organize them in document with captions explaining what you did at each step.

DESKTOP PC DISASSEMBLY – STEP BY STEP

1 Unplug All Cables




Turn off the PC and unplug the power cable and all other connected cables.

2 Remove Side Panel




Remove the screws at the back and slide off the side panel to open the case.

3 View Inside the Case

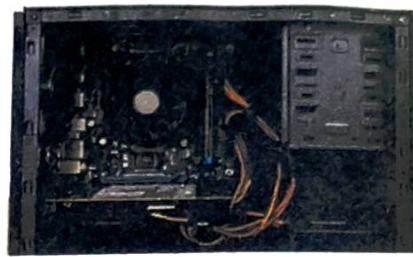

The inside components are now accessible.

4 Disconnect Power Cables

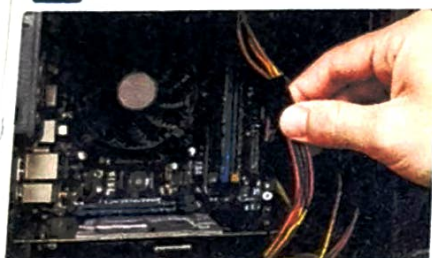


Disconnect the main power connector and other power cables from components.

5 Disconnect Data Cables



Disconnect SATA data cables from HDD/SSD and other components.

6 Remove RAM

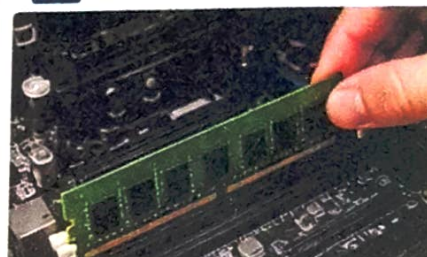

Push the clips on both sides of the RAM stick and lift it out carefully.

7 Remove CPU Cooler




Unplug the cooler fan cable and unscrew or unclip the cooler. Then lift it off the CPU.

8 Remove HDD / SSD



Remove screws holding the HDD/SSD and take it out of the drive bay.

9 Remove Expansion Cards

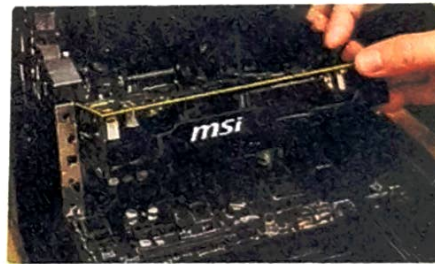


Unscrew the expansion card bracket and gently pull the card out of the slot.

10 Remove Power Supply




Unscrew the screws at the back of the PSU and slide it out of the case.

11 Remove Motherboard Screws

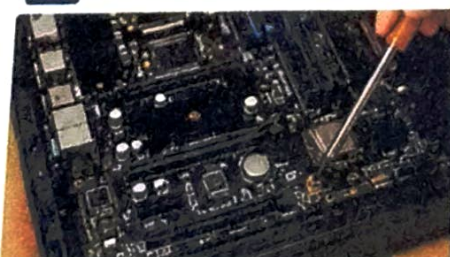

Remove all screws holding the motherboard to the case.

12 Remove Motherboard

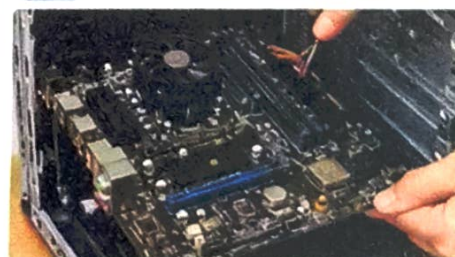

Carefully lift the motherboard out. The case is now empty.

3 Components Disassembled



major components have been moved successfully.

DISASSEMBLED COMPONENTS



Motherboard



CPU Cooler



RAM



HDD / SSD



Graphics Card



Power Supply

145(3) Reassemble your PC you disassembled, documenting each step with a brief explanation of what you connection or installed & why the order matters.

→ (1) Install PSU: Put the power box in the case first so you don't drop it on fragile parts later.

(2) Put CPU on motherboard: lock the chip into the socket while the board is sitting on a flat table outside the case.

(3) Snap in RAM: Push the memory sticks into their slot until they click.

(4) Wire it up: Plug in all power cables & case wires.

(5) CPU last: click the graphics card into place, power it, & close the area.

14) Create a checklist of safety precautions & tools needed before starting the PC assembly / disassembly process, & explain why each is important.

Tools needed:

- Phillips #2 Screwdriver: For case, motherboard & PSU screws.
- Phillips #0 Screwdriver: For tiny M.2 SSD screws.

Safety Rules:

Unplug & drain power: Unplug from wall strip.
Touch bare metal regularly or wear anti-static wrist stop if a part feels stuck - check alignment instead.