
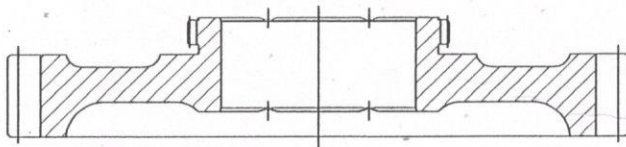
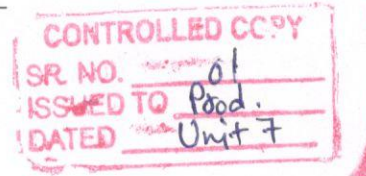




INSPECTION STANDARD (HT LAB)

☐ Prototype	☐ Pre-Launch	☒ Production	Date (Original)	25/11/13			
Part Name:- Assy. 1st Gear-C/Mesh		Part No.:- 1512A01201		Inspection Standard Number		SIP/3052/220	
Customer :- TAFE AGCO		Change Level.:-00		Part Stage		HT Lab.	
Sr.No.	Parameter	Special Char. Class	Methods				Reaction Plan
			Product Specification	Inspection Method	Inspection Frequency	Control Method	
1.	Surface Hardness	*	58~63 HRC	Rockwell Hardness Tester	1Pc/Lot	FMT-HT-39	A
2.	ECD	*	0.76~1.14 mm	Vicker Hardness Tester	1Pc/Lot	FMT-HT-39	A
3.	Core Hardness	*	27~41 HRC	Rockwell Hardness Tester	1Pc/Lot	FMT-HT-39	A
4.	Surface Carbon Content	*	0.8~1.10%	Microscope	1Pc/Lot	FMT-HT-39	A
5.	Surface Hardness on internal bore	*	27 HRC Min.	Rockwell Hardness Tester	1Pc/Lot	FMT-HT-39	A
6.	Micro Case	*	Tempered Martensite + RA 15% Max.	Microscope	1Pc/Lot	FMT-HT-39	A
7.	Core Micro	*	LCTM+Bainitic Structure	Microscope	1Pc/Lot	FMT-HT-39	A

OPEN SKTCH

Material- 16MnCr5CORE HARDNESS
MEASURED AT ROOT DIA.
6.4 FROM END OF TOOTHECD & HARDNESS
MEASURED AT MIDPOINT
OF TOOTH PROFILE 6.4
FROM END OF TOOTH.

Reaction Plan: A-यदि Inspection करते समय कम्पोनेंट खराब मिले तो खराब कम्पोनेंट को Rejection का टैग लगाकर Rejection टेबल पर रखें और उसके बारे में Department के Incharge को बतायें।

Legends: ☒ Special Characteristics as Per Drawing * Special Characteristics For Process ☒ Special Characteristics For Safety

Change Details

Date	Rev. No.	Change	Reason for Change	Date	Rev. No.	Change	Reason for Change

Prepared By:

Checked By:

Approved By: