

INSPECTION STANDARD (HT LAB)

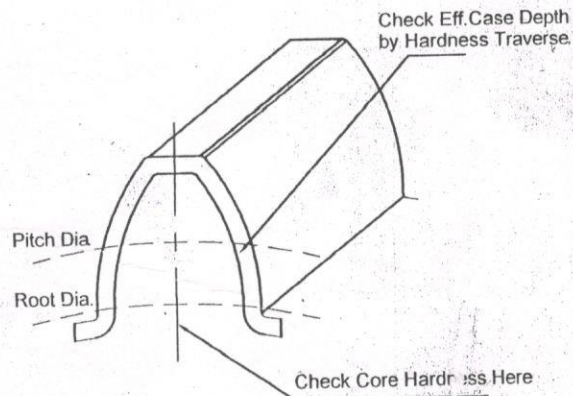
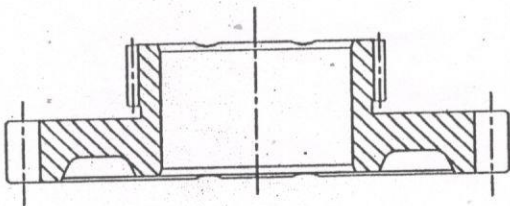


☐ Prototype	☐ Pre-Launch	☒ Production	Date (Original)	29/12/15
Part Name:- Gear Driven (45T)-MSPTO		Part No.:- 1510C05201	Inspection Standard Number	SIP/3079/180
Customer :- TAFE		Change Level.:-00	Part Stage	HT Lab.

Sr.No.	Parameter	Special Char. Class	Methods				Reaction Plan
			Product Specification	Inspection Method	Inspection Frequency	Control Method	
1.	Surface Hardness	*	58~62 HRC	Rockwell Hardness Tester	1Pc/Lot	FMT-HT-39	A
2.	ECD Measured To 550HV	*	0.80~1.20 mm	Vicker Hardness Tester	1Pc/Lot	FMT-HT-39	A
3.	Core Hardness	*	28~41 HRC	Rockwell Hardness Tester	1Pc/Lot	FMT-HT-39	A
4.	Surface Carbon Content	*	0.8~1.10%	Microscope	1Pc/Lot	FMT-HT-39	A
5.	Micro Case	*	Tempered Martensite + RA 15% Max.	Microscope	1Pc/Lot	FMT-HT-39	A
6.	Core Micro	*	LCM+Bainitic Structure	Microscope	1Pc/Lot	FMT-HT-39	A

CONTROLLED COPY
 SR NO. 01
 ISSUED TO Unit 7
 DATED 14/9/21

OPEN SKTCH

Material- 20MnCr5

Reaction Plan: A-यदि Inspection करते समय कम्पोनेंट खराब मिले तो खराब कम्पोनेंट को Rejection का टैग लगाकर Rejection टेबल पर रखें और उसके बारे में Department के Incharge को बतायें।

Legends: ☒ Special Characteristics as Per Drawing ☒ Special Characteristics For Process ☒ Special Characteristics For Safety

Change Details

Date	Rev. No.	Change	Reason for Change	Date	Rev. No.	Change	Reason for Change

Checked By:

Approved By: