



INSPECTION STANDARD (HT LAB)




Page 01 of 01

☐ Prototype	☐ Pre-Launch	☒ Production	Date (Original)	09/08/2024
Name:- Bull Gear		Part No.:-300670401A	Inspection Standard Number	SIP/20002/230
Former :- ITL		Change Level.:-00	Part Stage	HT Lab.

No.	Parameter	Special Char. Class	Methods				Reaction Plan
			Product Specification	Inspection Method	Inspection Frequency	Control Method	
	Surface Hardness	*	58~62 HRC	Rockwell Hardness Tester	1Pc/Lot	FMT-HT-39	A
	ECD Measured Up To 530 HV at 1 kg. Load at Gear PCD (Z-56)	*	1.15~1.35 mm	Micro Vicker/Vicker Hardness Tester	1Pc/Lot	FMT-HT-39	A
	Core Hardness on RCD	*	30~39 HRC	Rockwell Hardness Tester	1Pc/Lot	FMT-HT-39	A
	Micro Case	*	Tempered Martensite+ RA<15% Retained Austenite No Carbide Network Required	Microscope	1Pc/Lot	FMT-HT-39	A
	Micro Core	*	Bainite/Sorbite Free Ferrite <10%	Microscope	1Pc/Lot	FMT-HT-39	A

FACE FOR SKETCH:-

Material :- 20MnCr5

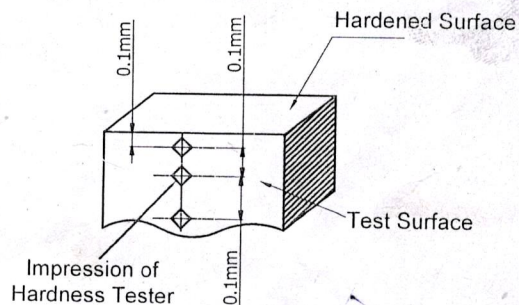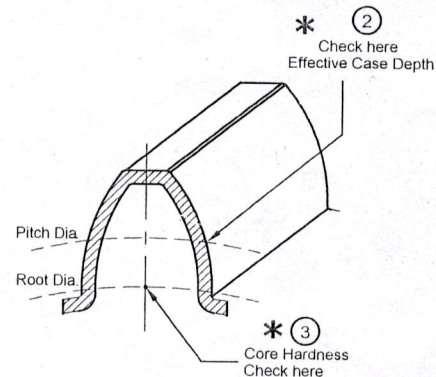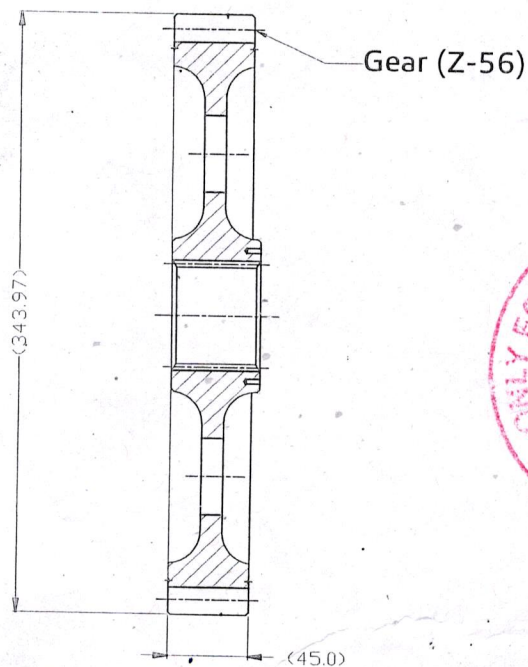

Transverse For Hardness Check

Action Plan: A-यदि Inspection करते समय कम्पोनेंट खराब मिले तो खराब कम्पोनेंट को Rejection का टैग लगाकर Rejection टेबल पर रखें और उसके बारे में Department के Incharge को बतायें।

gends:	☒ Special Characteristics as Per Drawing	☒ Special Characteristics For Process	☒ Special Characteristics For Safety
--------	--	---	--

Change Details

te	Rev. No.	Change	Reason for Change	Date	Rev. No.	Change	Reason for Change