



1. Description

1.1. Project

Project Name	RoboFest 6
Board Name	NUCLEO-F446RE
Generated with:	STM32CubeMX 6.18.1
Date	08/17/2026


1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F446
MCU name	STM32F446RETx
MCU Package	LQFP64
MCU Pin number	64

1.3. Core(s) information

Core(s)	Arm Cortex-M4
---------	---------------

2. Pinout Configuration

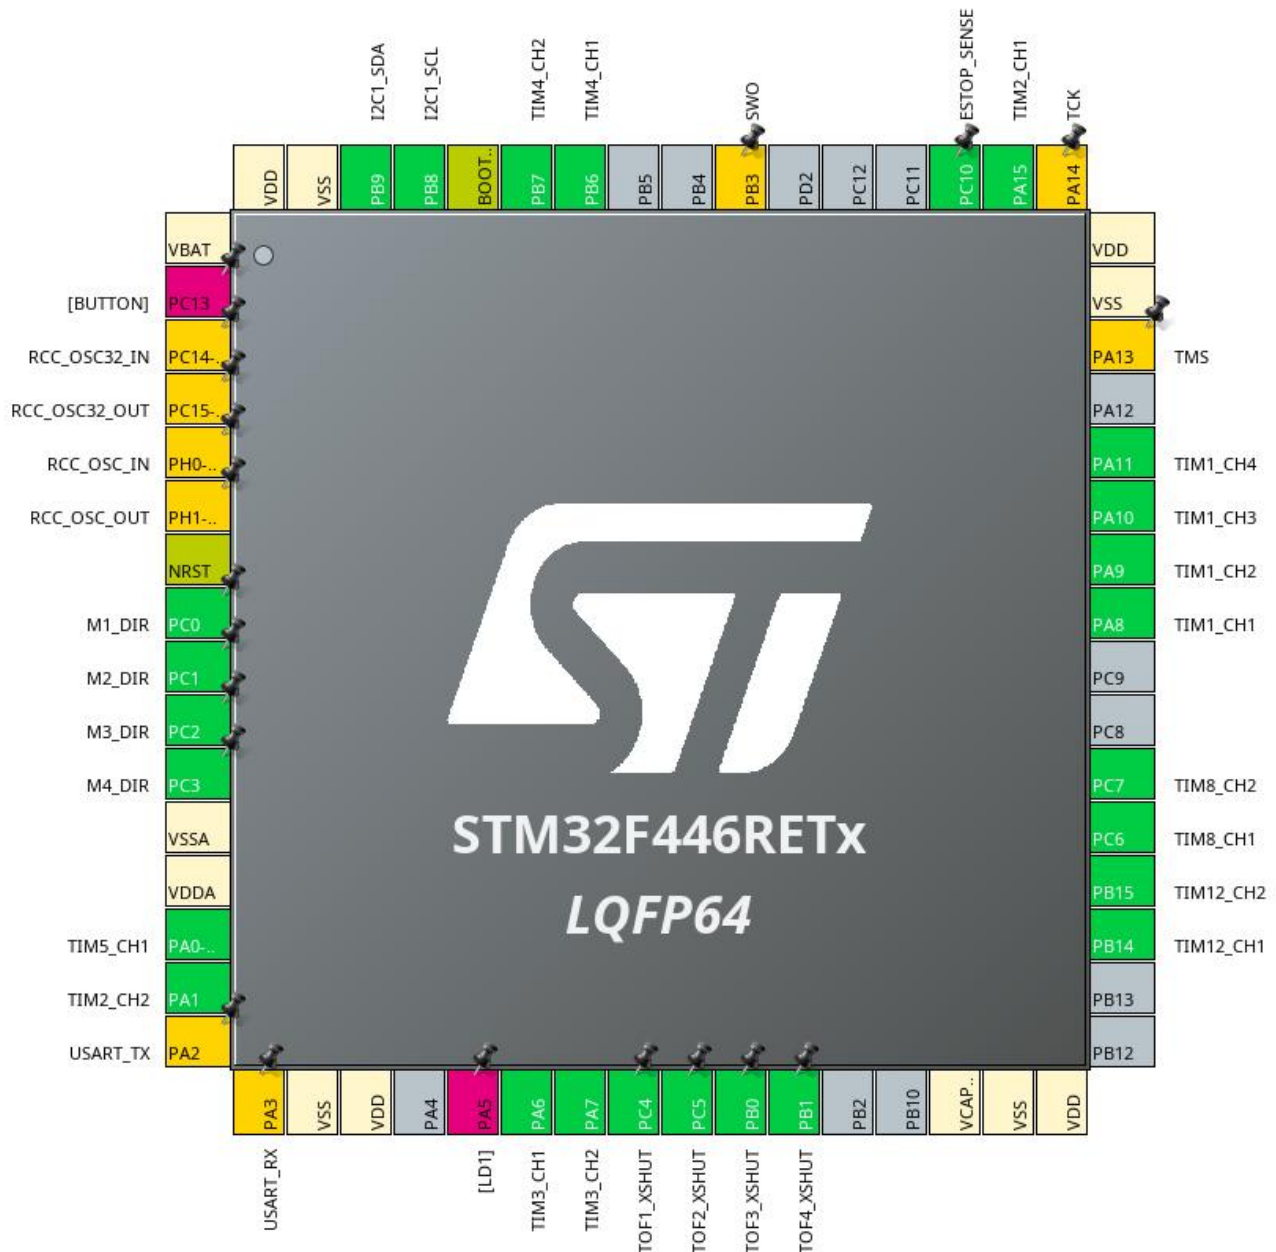

3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13	I/O		
3	PC14-OSC32_IN *	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT *	I/O	RCC_OSC32_OUT	
5	PH0-OSC_IN *	I/O	RCC_OSC_IN	
6	PH1-OSC_OUT *	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	PC0 **	I/O	GPIO_Output	M1_DIR
9	PC1 **	I/O	GPIO_Output	M2_DIR
10	PC2 **	I/O	GPIO_Output	M3_DIR
11	PC3 **	I/O	GPIO_Output	M4_DIR
12	VSSA	Power		
13	VDDA	Power		
14	PA0-WKUP	I/O	TIM5_CH1	
15	PA1	I/O	TIM2_CH2	
16	PA2 *	I/O	USART2_TX	USART_TX
17	PA3 *	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
21	PA5	I/O		
22	PA6	I/O	TIM3_CH1	
23	PA7	I/O	TIM3_CH2	
24	PC4 **	I/O	GPIO_Output	TOF1_XSHUT
25	PC5 **	I/O	GPIO_Output	TOF2_XSHUT
26	PB0 **	I/O	GPIO_Output	TOF3_XSHUT
27	PB1 **	I/O	GPIO_Output	TOF4_XSHUT
30	VCAP_1	Power		
31	VSS	Power		
32	VDD	Power		
35	PB14	I/O	TIM12_CH1	
36	PB15	I/O	TIM12_CH2	
37	PC6	I/O	TIM8_CH1	
38	PC7	I/O	TIM8_CH2	
41	PA8	I/O	TIM1_CH1	
42	PA9	I/O	TIM1_CH2	
43	PA10	I/O	TIM1_CH3	


Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
44	PA11	I/O	TIM1_CH4	
46	PA13 *	I/O	SYS_JTMS-SWDIO	TMS
47	VSS	Power		
48	VDD	Power		
49	PA14 *	I/O	SYS_JTCK-SWCLK	TCK
50	PA15	I/O	TIM2_CH1	
51	PC10	I/O	GPIO_EXTI10	ESTOP_SENSE
55	PB3 *	I/O	SYS_JTDO-SWO	SWO
58	PB6	I/O	TIM4_CH1	
59	PB7	I/O	TIM4_CH2	
60	BOOT0	Boot		
61	PB8	I/O	I2C1_SCL	
62	PB9	I/O	I2C1_SDA	
63	VSS	Power		
64	VDD	Power		

** The pin is affected with an I/O function

* The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

RIF configuration not available for STM32F446RETx

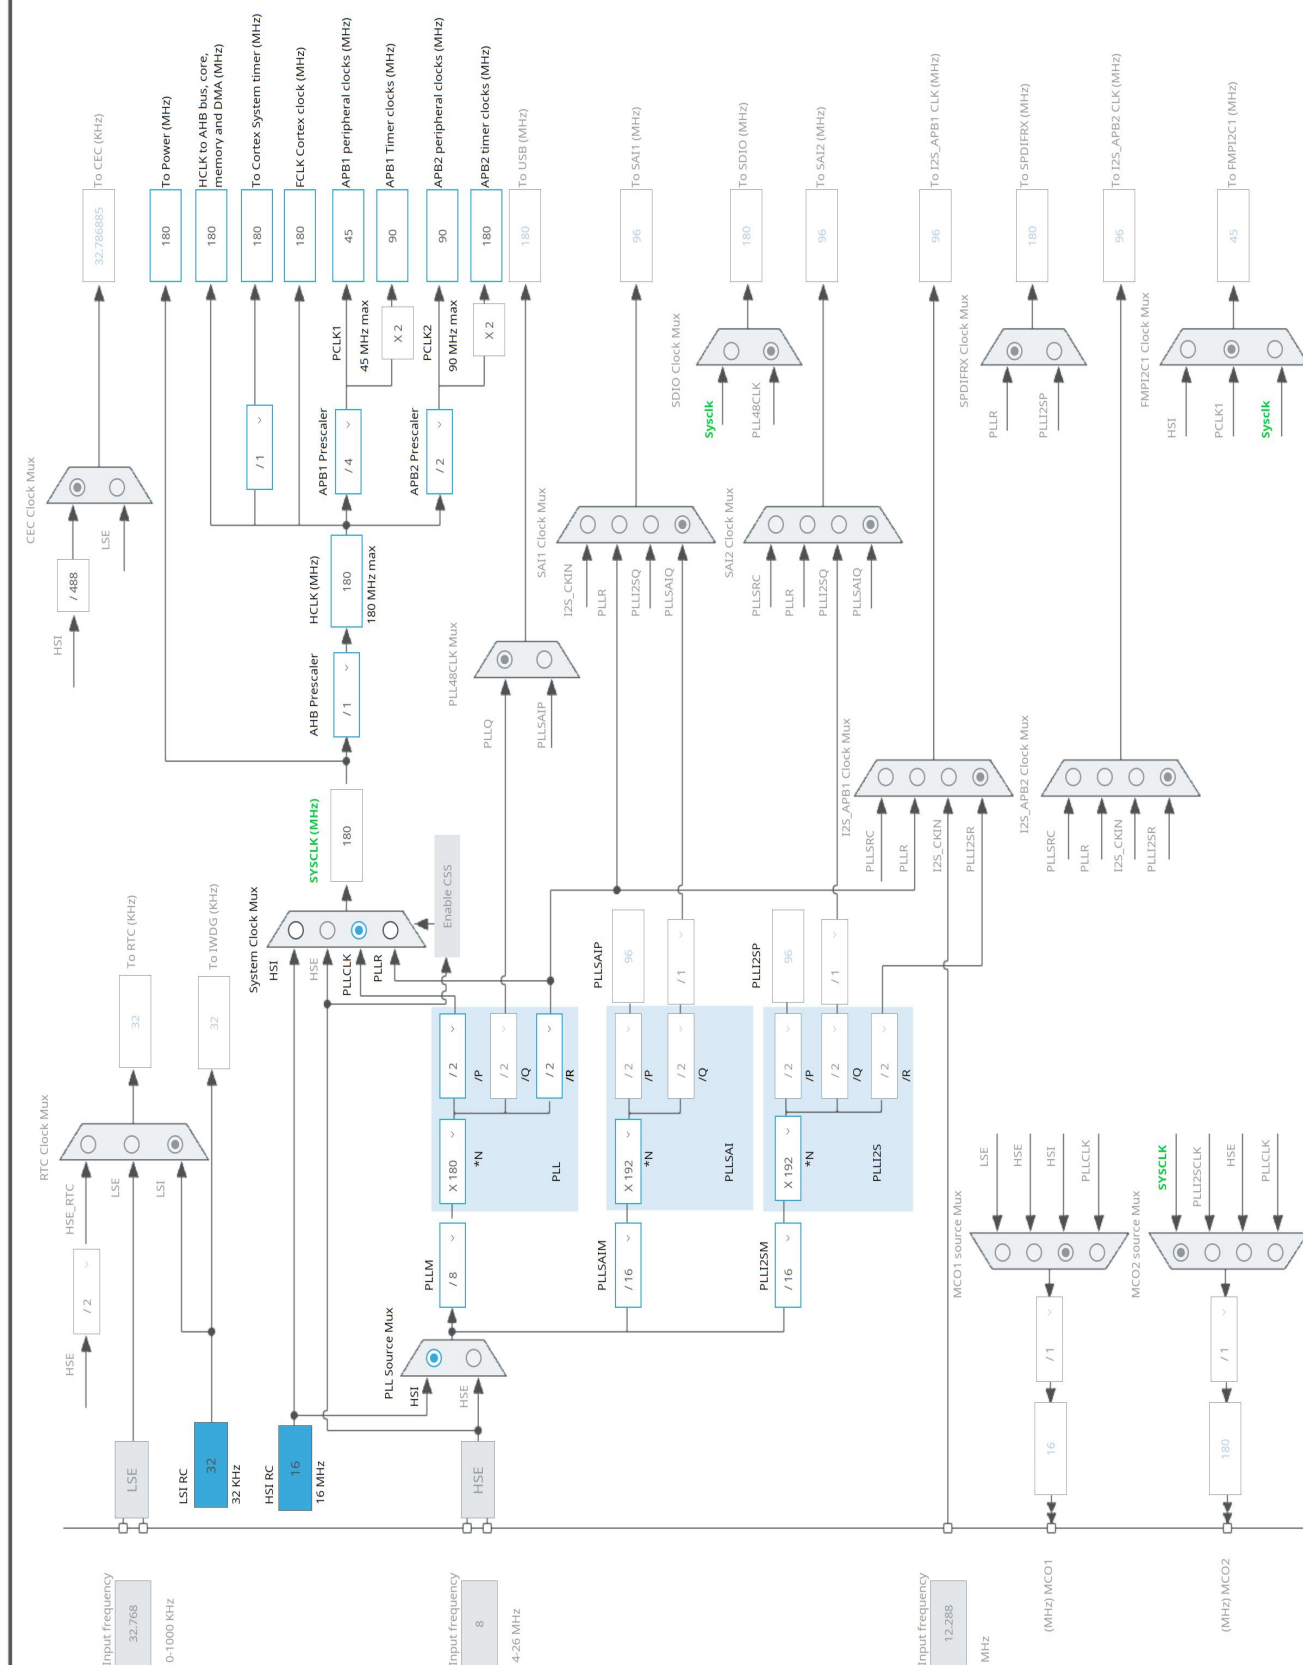

1. Power Consumption Calculator report

1.1. Microcontroller Selection

Series	STM32F4
Line	STM32F446
MCU	STM32F446RETx
Datasheet	DS10693 Rev6

1.2. Parameter Selection

Temperature	25
Vdd	3.3

1.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


1.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP_UDM (Under Drive)
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	Scale1-High	No Scale
Fetch Type	RAM/FLASH/REGON/ART/P REFETCH	n/a
CPU Frequency	180 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator_LP Flash-PwrDwn
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	46 mA	55 μ A
Duration	0.1 ms	0.9 ms
DMIPS	225.0	0.0
Ta Max	98.02	104.99
Category	In DS Table	In DS Table

1.5. Results

Sequence Time	1 ms	Average Current	4.65 mA
Battery Life	1 month	Average DMIPS	225.0 DMIPS

1.6. Chart

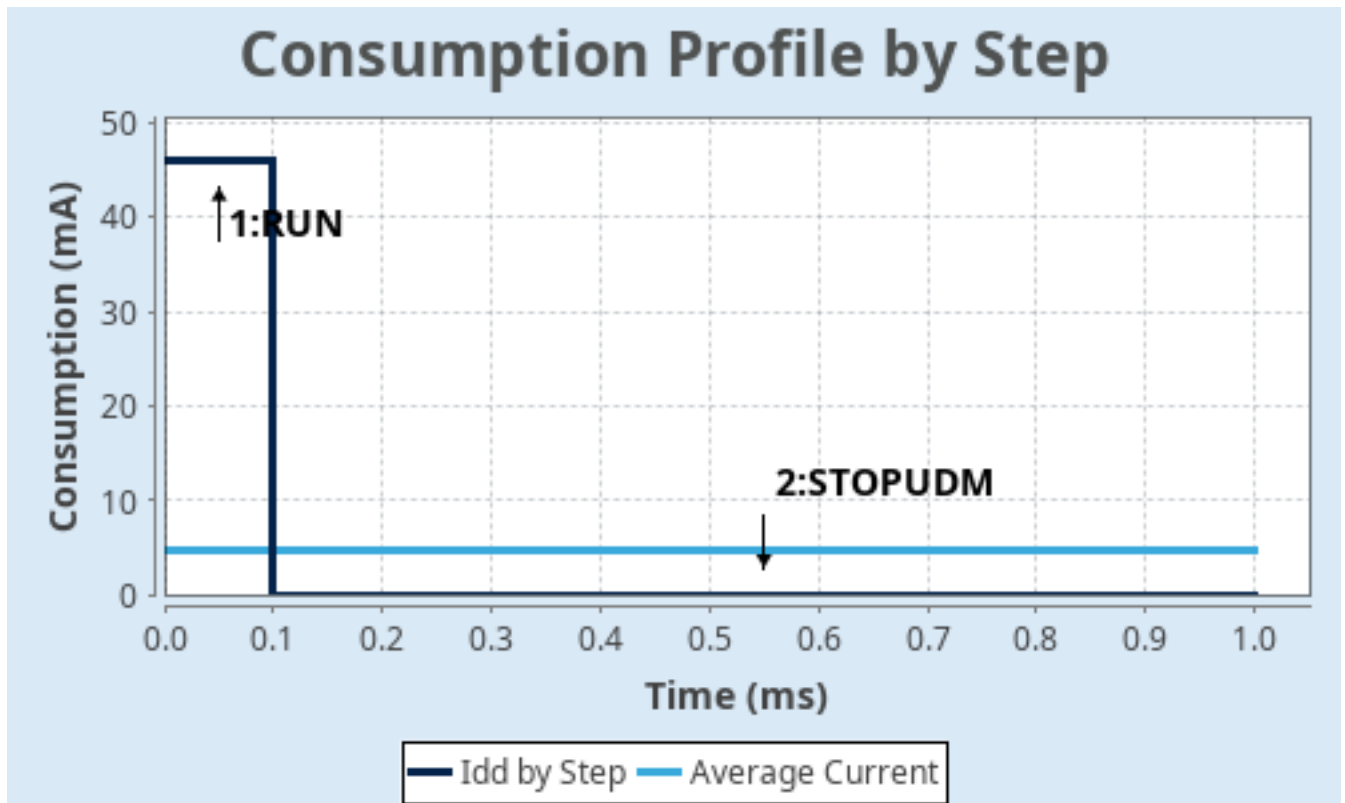

2. Software Project

2.1. Project Settings

Name	Value
Project Name	RoboFest 6.0 IGVC
Project Folder	/home/krishiv/RoboFest 6.0 IGVC
Toolchain / IDE	EWARM V8.50
Firmware Package Name and Version	STM32Cube FW_F4 V1.28.3
Application Structure	Advanced
Generate Under Root	No
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

2.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

2.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_I2C1_Init	I2C1
4	MX_TIM1_Init	TIM1
5	MX_TIM2_Init	TIM2
6	MX_TIM3_Init	TIM3
7	MX_TIM4_Init	TIM4
8	MX_TIM5_Init	TIM5
9	MX_TIM8_Init	TIM8
10	MX_TIM12_Init	TIM12

3. Peripherals and Middlewares Configuration

3.1. I2C1

I2C: I2C

3.1.1. Parameter Settings:

Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

3.2. NUCLEO-F446RE

mode: Human Machine Interface

3.2.1. Human Machine Interface:

Led:

USER LED GREEN (LED1)	true *
-----------------------	--------

Button:

USER BUTTON	Mode EXTI *
-------------	-------------

Demonstration code:

Generate demonstration code	Enabled
-----------------------------	---------

3.3. RCC

3.3.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	5 WS (6 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
Power Over Drive	Enabled

3.4. SYS

Timebase Source: SysTick

3.5. TIM1

Channel1: PWM Generation CH1

Channel2: PWM Generation CH2

Channel3: PWM Generation CH3

Channel4: PWM Generation CH4

3.5.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	65535
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 8 bits value)	0
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

Break And Dead Time management - BRK Configuration:

BRK State	Disable
BRK Polarity	High

Break And Dead Time management - Output Configuration:

Automatic Output State	Disable
Off State Selection for Run Mode (OSSR)	Disable
Off State Selection for Idle Mode (OSSI)	Disable
Lock Configuration	Off

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High
CH Idle State	Reset

PWM Generation Channel 2:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High
CH Idle State	Reset

PWM Generation Channel 3:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High
CH Idle State	Reset

PWM Generation Channel 4:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High
CH Idle State	Reset

3.6. TIM2

Combined Channels: Encoder Mode

3.6.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 32 bits value)	4294967295
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
-----------------------------	--

Reset (UG bit from TIMx_EGR)

Encoder:

Encoder Mode TI1

_____ Parameters for Channel 1 _____

Rising Edge

Direct

No division

0

Parameters for Channel 2

Rising Edge

Direct

No division

0

3.7. TIM3

Combined Channels: Encoder Mode

3.7.1. Parameter Settings:

Counter Settings:

0

Up

65535

No Division

Disable

Trigger Output (TRGO) Parameters:

Disable (Trigger input effect not delayed)

Reset (UG bit from TIMx_EGR)

Encoder:

Encoder Mode T11

Parameters for Channel 1

Rising Edge

Direct

No division

0

Parameters for Channel 2

Rising Edge

Direct

No division

0

3.8. TIM4

Combined Channels: Encoder Mode

3.8.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	65535
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

Encoder:

Encoder Mode	Encoder Mode TI1
____ Parameters for Channel 1 ____	
Polarity	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter	0
____ Parameters for Channel 2 ____	
Polarity	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter	0

3.9. TIM5

Channel1: PWM Generation CH1

3.9.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 32 bits value)	4294967295
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (32 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High

3.10. TIM8

Combined Channels: Encoder Mode

3.10.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	65535
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 8 bits value)	0
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

Encoder:

Encoder Mode	Encoder Mode T11
____ Parameters for Channel 1 ____	
Polarity	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter	0
____ Parameters for Channel 2 ____	
Polarity	Rising Edge
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter	0

3.11. TIM12

Channel1: PWM Generation CH1

Channel2: PWM Generation CH2

3.11.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	65535
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High

PWM Generation Channel 2:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High

*** User modified value**

4. System Configuration

4.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB8	I2C1_SCL	Alternate Function Open Drain	No pull-up and no pull-down	Very High *	
	PB9	I2C1_SDA	Alternate Function Open Drain	No pull-up and no pull-down	Very High *	
TIM1	PA8	TIM1_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PA9	TIM1_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PA10	TIM1_CH3	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PA11	TIM1_CH4	Alternate Function Push Pull	No pull-up and no pull-down	Low	
TIM2	PA1	TIM2_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PA15	TIM2_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
TIM3	PA6	TIM3_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PA7	TIM3_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Low	
TIM4	PB6	TIM4_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PB7	TIM4_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Low	
TIM5	PA0-WKUP	TIM5_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
TIM8	PC6	TIM8_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PC7	TIM8_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Low	
TIM12	PB14	TIM12_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PB15	TIM12_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Low	
Single Mapped Signals	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USART_RX
	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	TCK
	PB3	SYS_JTDO-	n/a	n/a	n/a	SWO

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
		SWO				
GPIO	PC0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	M1_DIR
	PC1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	M2_DIR
	PC2	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	M3_DIR
	PC3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	M4_DIR
	PC4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	TOF1_XSHUT
	PC5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	TOF2_XSHUT
	PB0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	TOF3_XSHUT
	PB1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	TOF4_XSHUT
	PC10	GPIO_EXTI10	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	ESTOP_SENSE

4.2. DMA configuration

nothing configured in DMA service

4.3. NVIC configuration

4.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
EXTI line[15:10] interrupts	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
TIM1 break interrupt and TIM9 global interrupt	unused		
TIM1 update interrupt and TIM10 global interrupt	unused		
TIM1 trigger and commutation interrupts and TIM11 global interrupt	unused		
TIM1 capture compare interrupt	unused		
TIM2 global interrupt	unused		
TIM3 global interrupt	unused		
TIM4 global interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
TIM8 break interrupt and TIM12 global interrupt	unused		
TIM8 update interrupt and TIM13 global interrupt	unused		
TIM8 trigger and commutation interrupts and TIM14 global interrupt	unused		
TIM8 capture compare interrupt	unused		
TIM5 global interrupt	unused		
FPU global interrupt	unused		

4.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true
EXTI line[15:10] interrupts	false	true	true

*** User modified value**

5. System Views

5.1. Category view

5.1.1. Current

Middleware

System Core

Analog

Timers

Connectivity

Multimedia

Computing

Bsp

DMA

GPIO ⚠

NVIC ✓

RCC ✓

SYS ✓

TIM1 ✓

TIM2 ✓

TIM3 ✓

TIM4 ✓

TIM5 ✓

TIM8 ✓

TIM12 ✓

I2C1 ✓

NUCLEO-F446RE ✓

6. Docs & Resources

Type	Link
BSDL files	https://www.st.com/resource/en/bsdl_model/stm32f446_bsdl.zip
IBIS models	https://www.st.com/resource/en/ibis_model/stm32f446_ibis.zip
System View Description	https://www.st.com/resource/en/svd/stm32f4-svd.zip
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_embedded_software_solutions.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_eval_tools_portfolio.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_stm8_functional-safety-packages.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_software_development_tools.pdf
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers-stm32-family-overview.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32nucleo.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32trust.pdf
Product Certifications	https://www.st.com/resource/en/certification_document/stm32_authentication_can.pdf
Security Bulletin	https://www.st.com/resource/en/technical_note/tn1489-security-bulletin-tn1489stpsirt-physical-attacks-on-stm32-and-stm32cube-firmware-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an1709-emc-design-guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an2945-stm8s-and-stm32-mcus-a-consistent-832bit-product-line-for-painless-migration-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an3070-managing-the-driver-enable-signal-for-rs485-and-iolink-communications-with-the-stm32s-usart-stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application_note/an3364-migration-and-compatibility-guidelines-for-stm32-microcontroller-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3997-audio-playback-and-recording-using-the-stm32f4discovery-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3998-pdm-audio-software-decoding-on-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4031-using-the-stm32f2-stm32f4-and-stm32f7-series-dma-controller-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4221-i2c-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4488-getting-started-with-stm32f4xxxx-mcu-hardware-development-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4640-peripherals-interconnections-on-stm32f4057xx-stm32f4157xx-stm32f42xxx-stm32f43xxx-stm32f446xx-and-stm32f469479xx-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4658-migration-of-applications-from-stm32f429439-lines-to-stm32f446-line-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4739-stm32cube-firmware-examples-for-stm32f4-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4850-stm32-mcus-spreadspectrum-clock-generation-principles-properties-and-implementation-stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application_note/an4995-using-an-electromyogram-technique-to-detect-muscle-activity-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5073-receiving-spdif-audio-stream-with-the-stm32f4f7h7-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4899-stm32-microcontroller-gpio-hardware-settings-and-lowpower-consumption-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5612-esd-protection-of-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4838-introduction-to-memory-protection-unit-management-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4879-introduction-to-usb-hardware-and-pcb-guidelines-using-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5225-introduction-to-usb-typec-power-delivery-for-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5537-how-to-use-adc-oversampling-techniques-to-improve-signal-to-noise-ratio-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4230-introduction-to-random-number-generation-validation-using-the-nist-statistical-test-suite-for-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2867-guidelines-for-oscillator-design-on-stm8afals-and-stm32-mcus-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4013-introduction-to-timers-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4277-how-to-use-pwm-shutdown-for-motor-control-and-digital-power-conversion-on-stm32-

mcus-stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application_note/an4908-getting-started-with-usart-automatic-baud-rater-detection-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5156-introduction-to-security-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5543-guidelines-for-enhanced-spi-communication-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5992-migrating-from-stm32f446-to-stm32h523533-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/cd00211314-how-to-optimize-the-adc-accuracy-in-the-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2639-soldering-recommendations-and-package-information-for-leadfree-ecopack2-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5020-introduction-to-digital-camera-interface-dcml-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3154-how-to-use-can-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4566-how-to-extend-the-dac-performance-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5647-the-goertzel-algorithm-to-compute-individual-terms-of-the-discrete-fourier-transform-dft-in-stm32-products-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2606-introduction-to-system-memory-boot-mode-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5036-guidelines-for-thermal-management-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3126-how-to-use-dac-for-audio-and-waveform-generation-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes [---

Page 26](https://www.st.com/resource/en/application_note/an3155-how-to-use-</p></div><div data-bbox=)

usart-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3156-how-to-use-usb-dfu-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4286-how-to-use-spi-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4759-introduction-to-using-the-hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4760-introduction-to-quadspi-interface-for-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4776-how-to-use-generalpurpose-timer-peripheral-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4989-introduction-to-debug-toolbox-for-stm32-mcus-stmicroelectronics.pdf

Errata Sheets https://www.st.com/resource/en/errata_sheet/es0298-stm32f446xcxe-device-errata-stmicroelectronics.pdf

Datasheet <https://www.st.com/resource/en/datasheet/dm00141306.pdf>

Programming Manuals https://www.st.com/resource/en/programming_manual/pm0214-stm32-cortexm4-mcus-and-mpus-programming-manual-stmicroelectronics.pdf

Reference Manuals https://www.st.com/resource/en/reference_manual/rm0390-stm32f446xx-advanced-armbased-32bit-mcus-stmicroelectronics.pdf

Technical Notes & Articles https://www.st.com/resource/en/technical_note/tn0516-overview-of-the-stm32f0xf100xxf103xx-and-stm32f2xxf30xf4xx-mcus-pmsm-singledual-foc-sdk-v40-stmicroelectronics.pdf

Technical Notes & Articles https://www.st.com/resource/en/technical_note/tn1163-description-of-wlcsp-for-microcontrollers-and-recommendations-for-its-use-stmicroelectronics.pdf

Technical Notes & Articles https://www.st.com/resource/en/technical_note/tn1205-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packages-stmicroelectronics.pdf

Technical Notes & Articles https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packages-stmicroelectronics.pdf

Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1208-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssop-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1433-reference-device-marking-schematics-for-stm32-microcontrollers-and-microprocessors-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1204-tape-and-reel-shipping-media-for-stm32-devices-in-bga-packages-stmicroelectronics.pdf
User Manuals	https://www.st.com/resource/en/user_manual/um3461-stm32f4-series-ulcsaiec-607301603351-selftest-library-user-guide-stmicroelectronics.pdf