CS450 Computer Networks

The slides used in class are derived from the slides available on our text book companion website:
http://wps.pearsoned.com/ecs_kurose_compnetw_6/

CS450 Computer Networks
Lesson 15
Network Layer – Routing in the Internet

The field of all possibilities is the source of all solutions.

Lesson 15: Network Layer – Rounting in the Internet

Our goal: Understand Routing in the Internet

- Hierarchical Routing
- RIP – Routing Information Protocol
- OSPF – Open Shortest Path First
- BGP – Border Gateway Protocol

Hierarchical Routing

Our routing study thus far - idealization

- all routers identical
- network "flat"

… *not* true in practice

scale: with 600 million destinations:

- can't store all dest's in routing tables!
- routing table exchange would swamp links!

administrative autonomy

- internet = network of networks
- each network admin may want to control routing in its own network

Hierarchical Routing

- aggregate routers into regions, "autonomous systems" (AS)
- routers in same AS run same routing protocol
  - "intra-AS" routing protocol
  - routers in different AS can run different intra-AS routing protocol

gateway router

- at "edge" of its own AS
- has link to router in another AS

Can you think of a human communication analogy?

Interconnected ASes

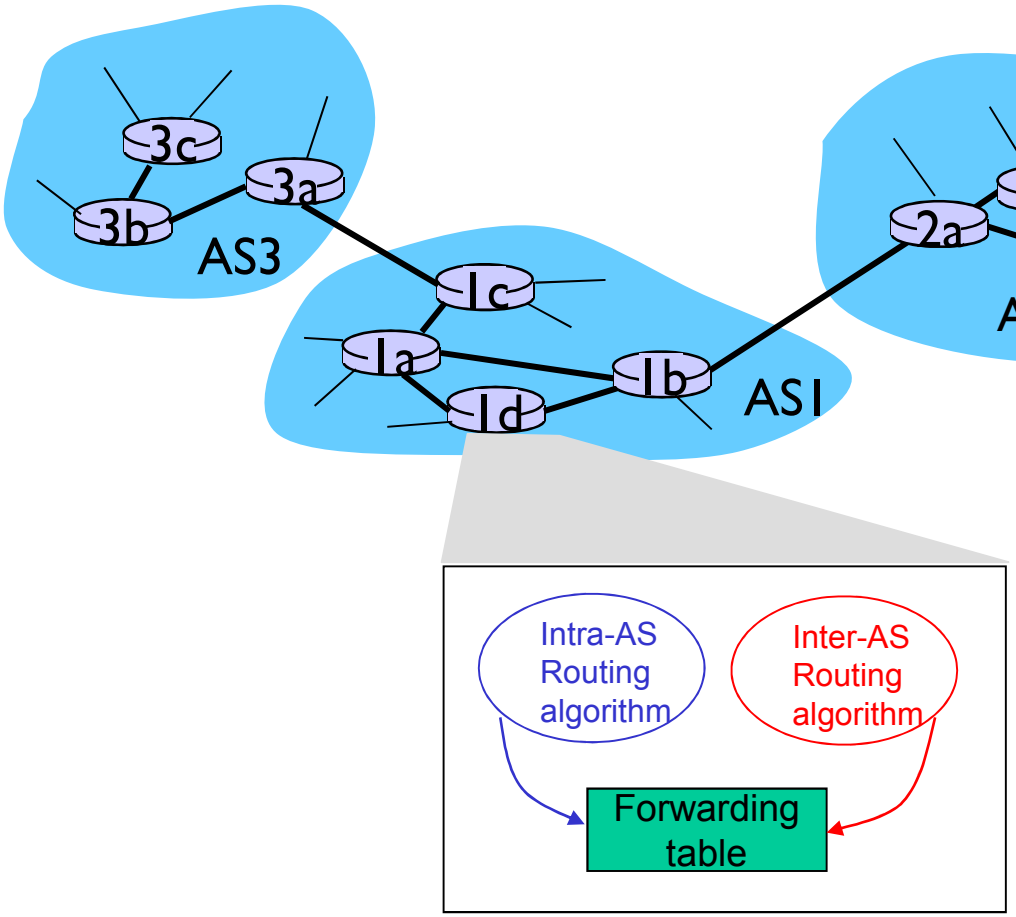

- forwarding table configured by both intra- and inter-AS routing algorithm
  - intra-AS sets entries for internal dests
  - inter-AS & intra-As sets entries for external dests

Inter-AS tasks

- suppose router in AS1 receives datagram destined outside of AS1:
  - router should forward packet to gateway router, but which one?

AS1 must:

1. learn which dests are reachable through AS2, which through AS3
2. propagate this reachability info to all routers in AS1

job of inter-AS routing!

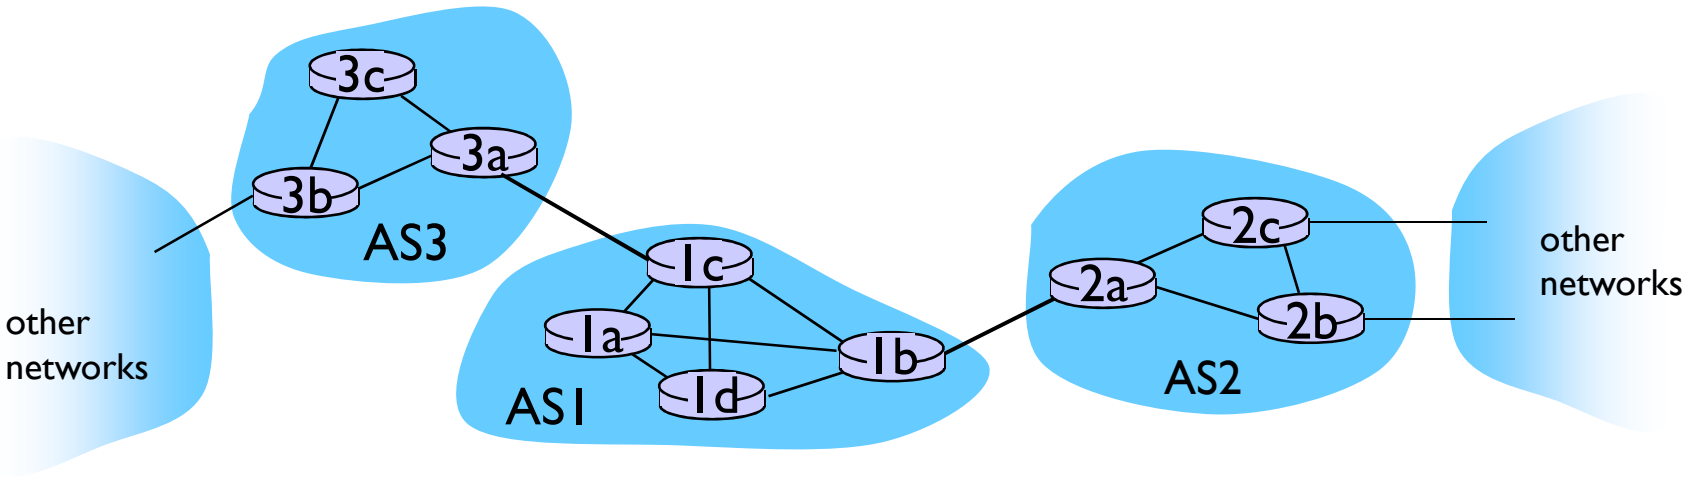

Example: Setting forwarding table in router 1d

- suppose AS1 learns (via inter-AS protocol) that subnet *x* reachable via AS3 (gateway 1c) but not via AS2.
  - inter-AS protocol propagates reachability info to all internal routers
- router 1d determines from intra-AS routing info that its interface *I* is on the least cost path to 1c.
  - installs forwarding table entry *(x,I)*

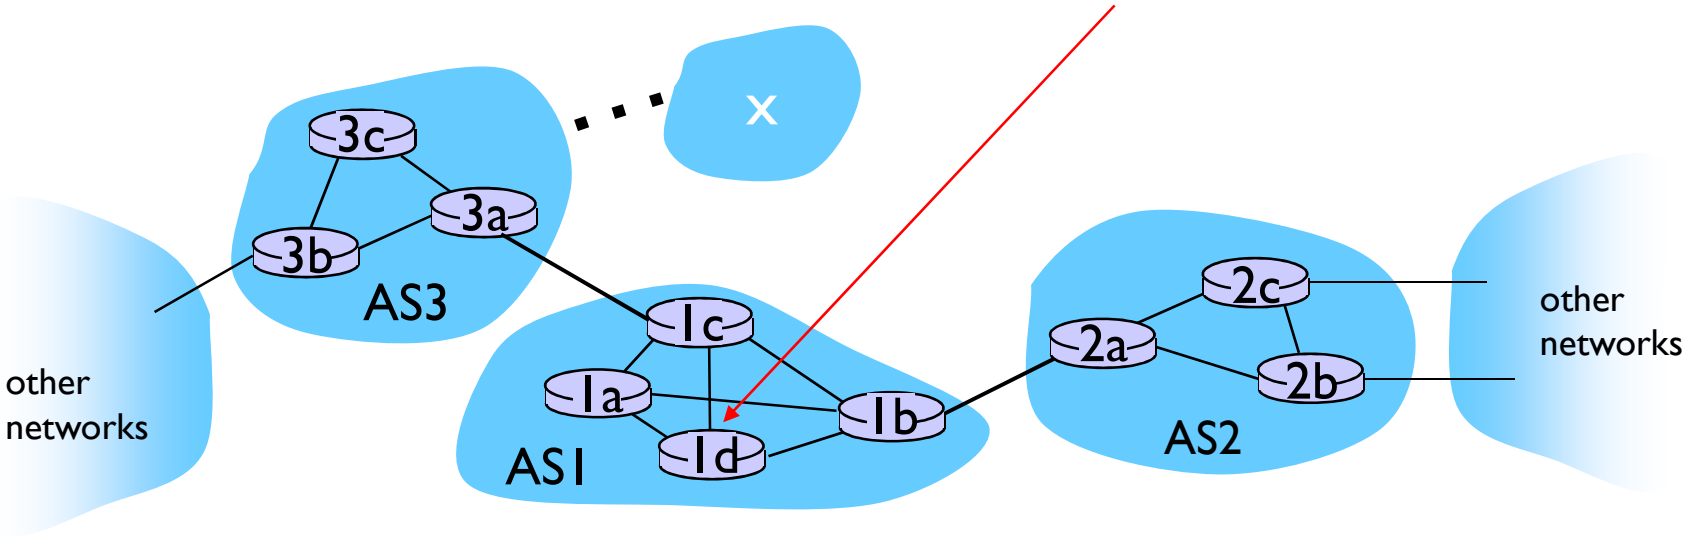

Example: Choosing among multiple ASes

- now suppose AS1 learns from inter-AS protocol that subnet *x* is reachable from AS3 *and* from AS2.
- to configure forwarding table, router 1d must determine which gateway it should forward packets towards for dest x
  - this is also job of inter-AS routing protocol!

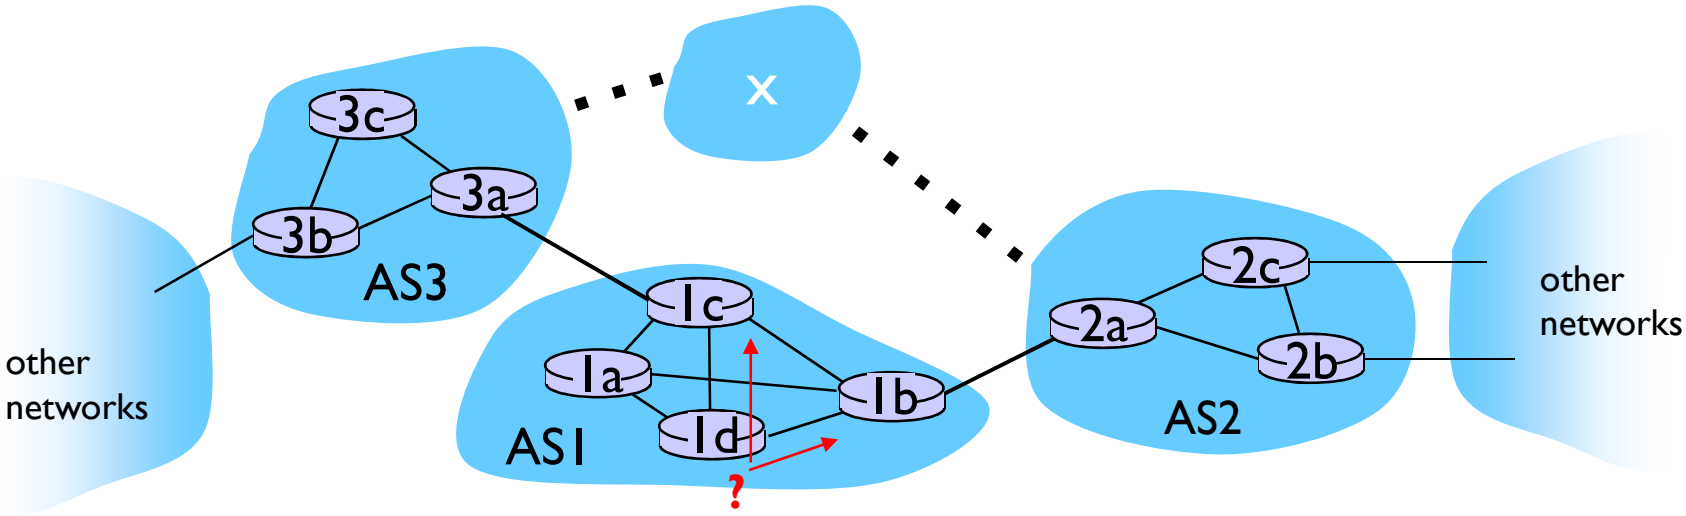

Example: Choosing among multiple ASes

- now suppose AS1 learns from inter-AS protocol that subnet *x* is reachable from AS3 *and* from AS2.
- to configure forwarding table, router 1d must determine towards which gateway it should forward packets for dest x.
  - this is also job of inter-AS routing protocol!
- hot potato routing: send packet towards closest of two routers.

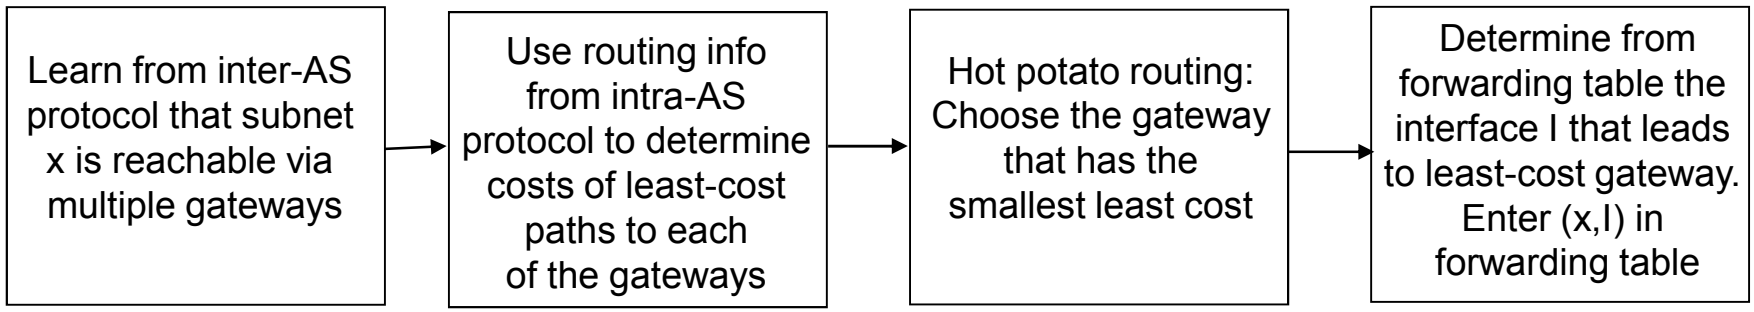

Intra-AS Routing

- also known as Interior Gateway Protocols (IGP)
- most common Intra-AS routing protocols:
  - RIP: Routing Information Protocol
  - OSPF: Open Shortest Path First
  - IGRP: Interior Gateway Routing Protocol (Cisco proprietary)

RIP (Routing Information Protocol)

- included in BSD-UNIX distribution in 1982
- distance vector algorithm
  - distance metric: # hops (max = 15 hops), each link has cost 1
  - DVs exchanged with neighbors every 30 sec in response message (aka advertisement)
  - each advertisement: list of up to 25 destination *subnets (in IP addressing sense)*

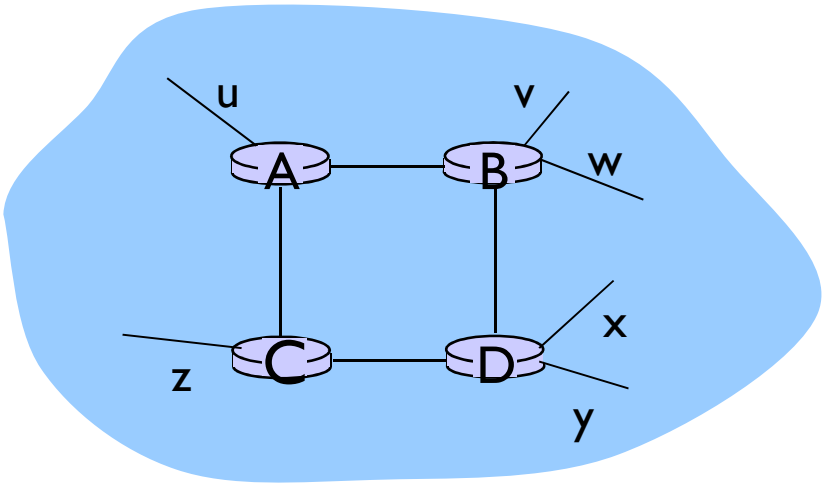

from router A to destination subnets:

subnet	hops
u	1
v	2
w	2
x	3
y	3
z	2

RIP: Example

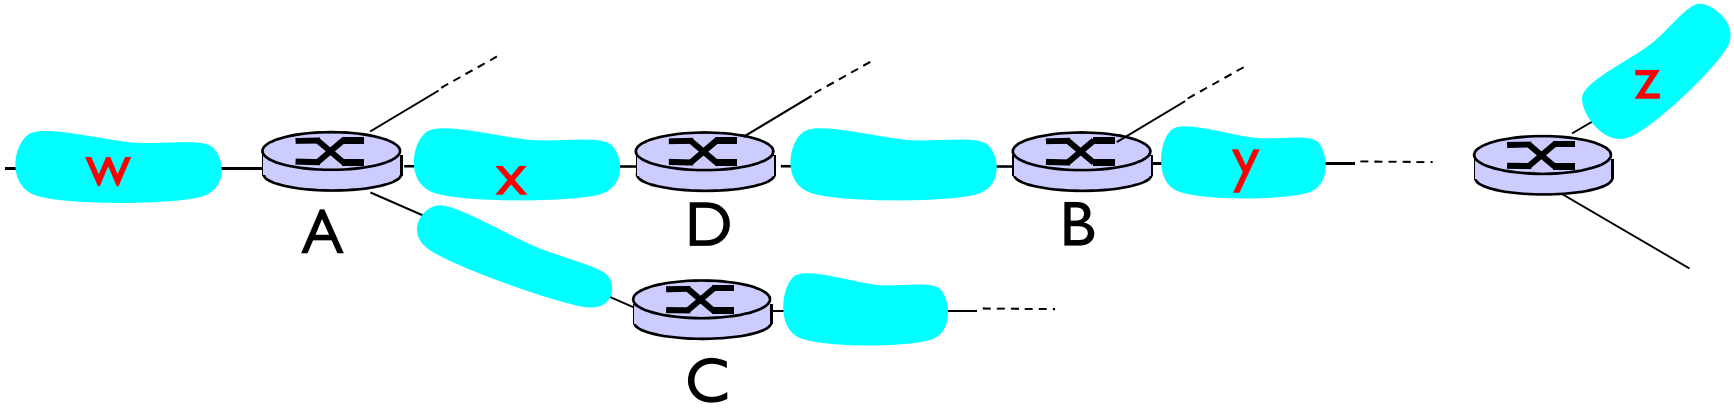

routing table in router D

destination subnet	next router	# hops to dest
w	A	2
y	B	2
x	--	1
....	....	....

RIP: Example

A-to-D advertisement

dest	next	hops
w	-	1
x	-	1
z	C	4
....	....	....

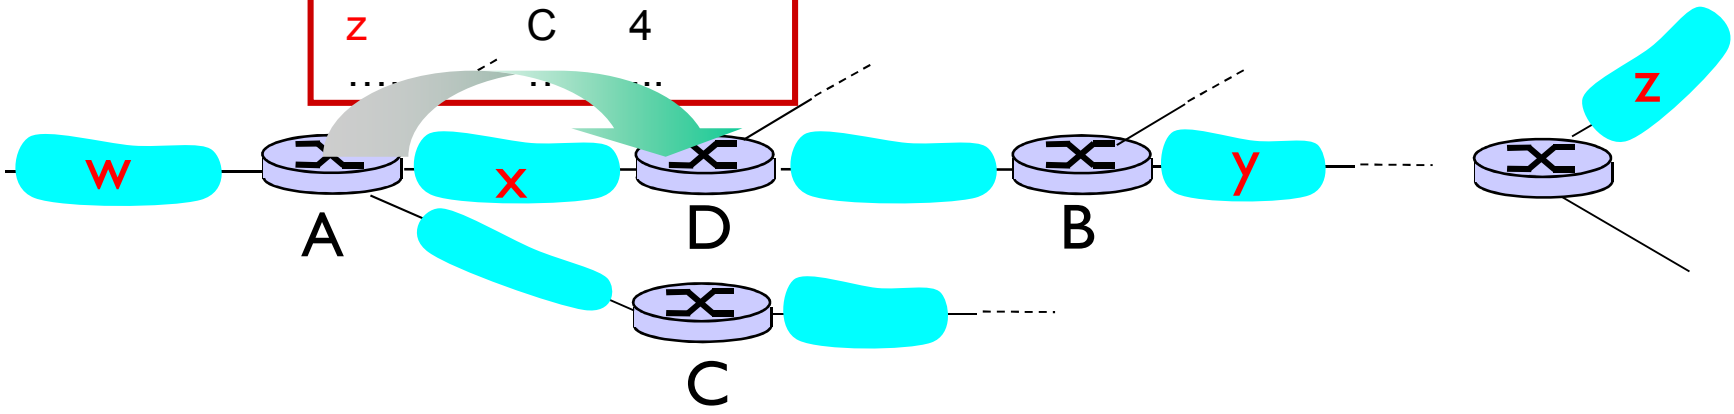

routing table in router D

destination subnet	next router	# hops to dest
w	A	2
y	B	2
z	B A	7 5
x	--	1
....	....	....

RIP: Link Failure and Recovery

If no advertisement heard after 180 sec --> neighbor/link declared dead

- routes via neighbor invalidated
- new advertisements sent to neighbors
- neighbors in turn send out new advertisements (if tables changed)
- link failure info propagates to entire net
- *poison reverse* used to prevent ping-pong loops (infinite distance = 16 hops)

RIP Table processing

- RIP routing tables managed by **application-level** process called route-d (daemon)
- advertisements sent in UDP packets, periodically repeated

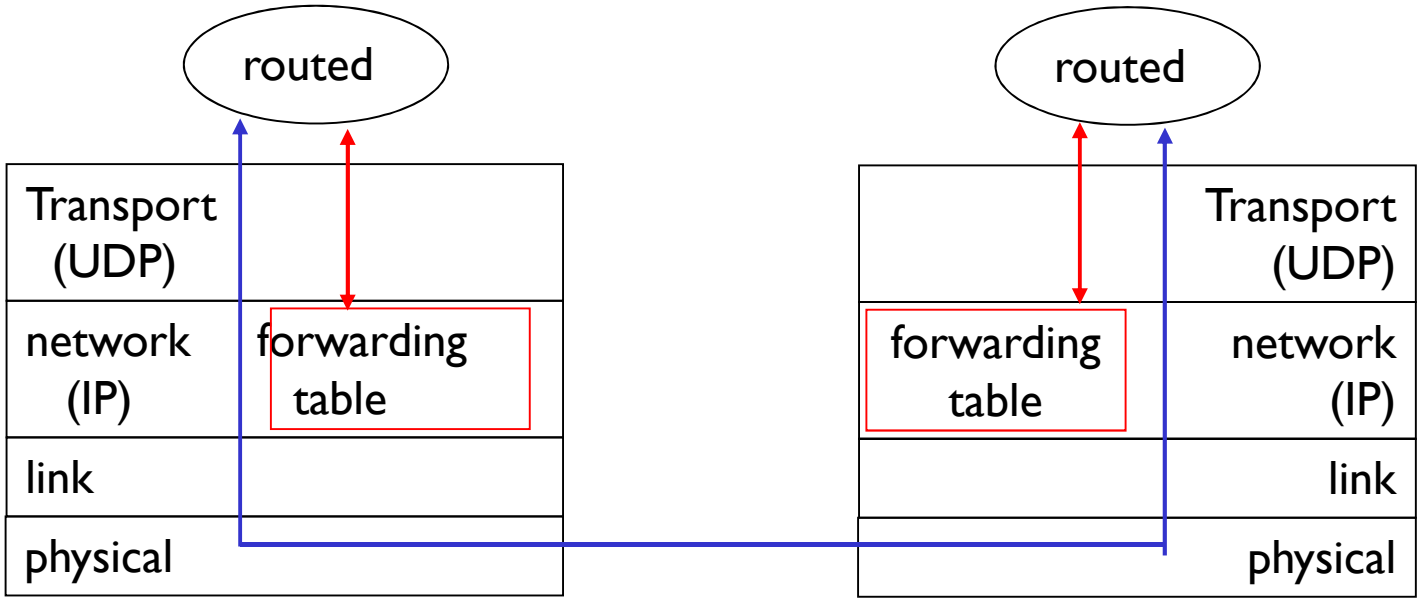

OSPF (Open Shortest Path First)

- "open": publicly available
- uses Link State algorithm
  - LS packet dissemination
  - topology map at each node
  - route computation using Dijkstra's algorithm

- OSPF advertisement carries one entry per neighbor router
- advertisements disseminated to entire AS (via flooding)
  - carried in OSPF messages directly over IP (rather than TCP or UDP

OSPF "advanced" features (not in RIP)

- security: all OSPF messages authenticated (to prevent malicious intrusion)
- multiple same-cost paths allowed (only one path in RIP)
- for each link, multiple cost metrics for different TOS (e.g., satellite link cost set "low" for best effort ToS; high for real time ToS)
- integrated uni- and multicast support:
  - Multicast OSPF (MOSPF) uses same topology data base as OSPF
- hierarchical OSPF in large domains.

Hierarchical OSPF

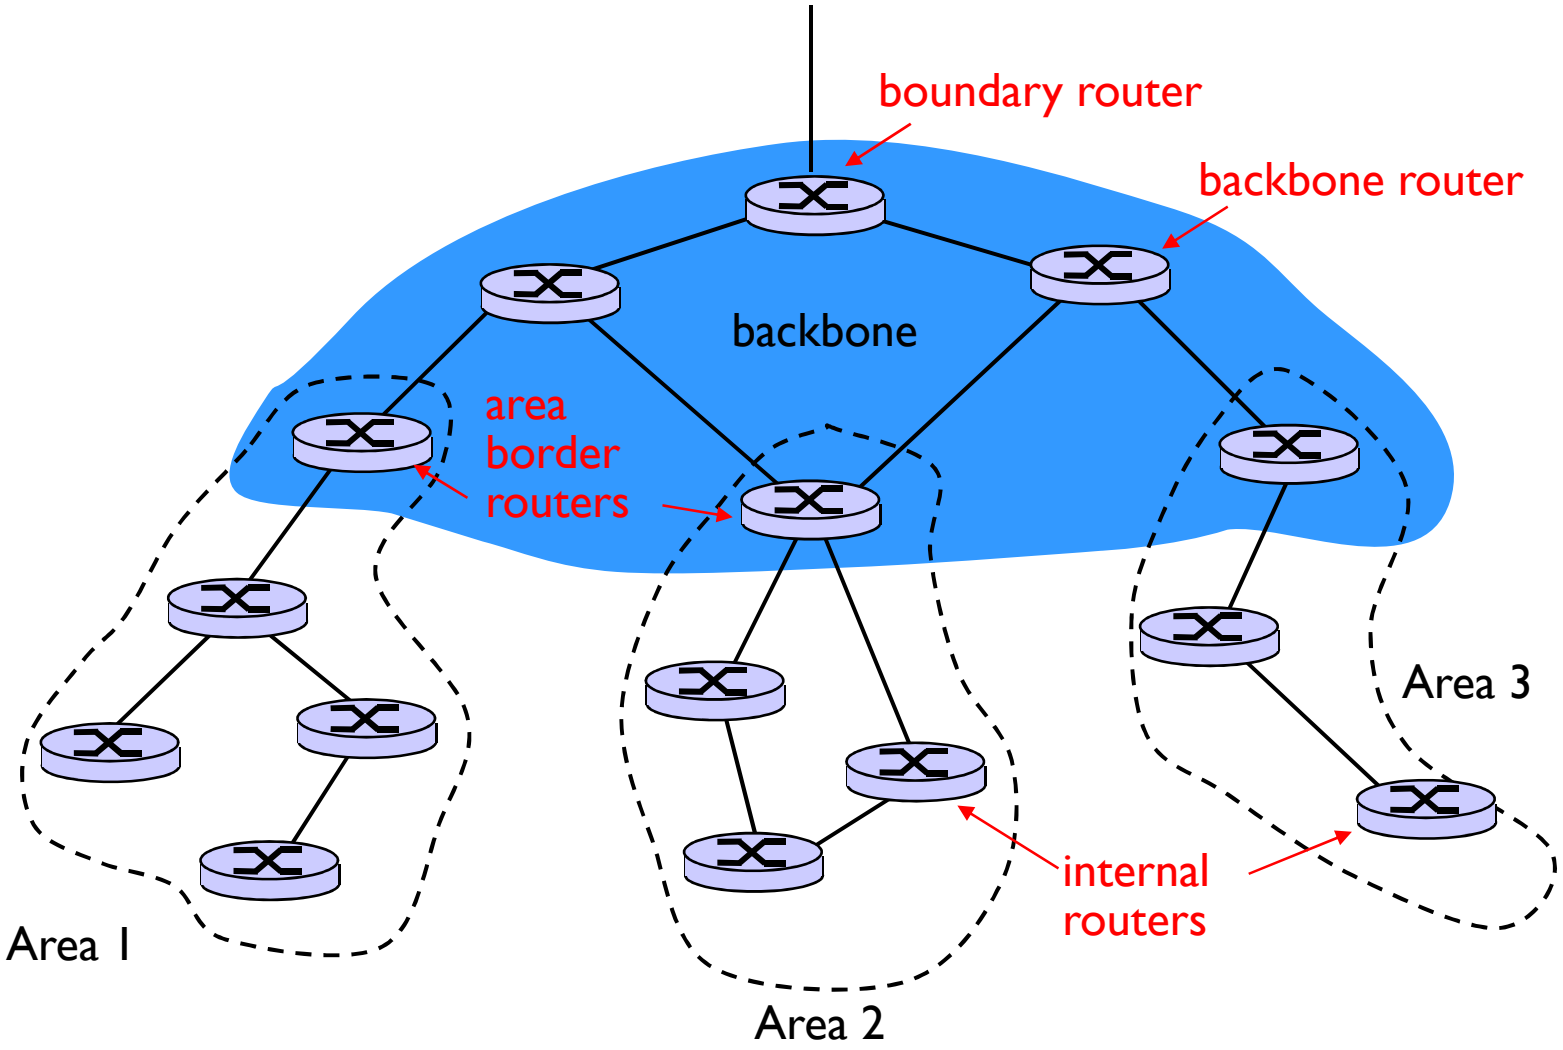

Hierarchical OSPF

- two-level hierarchy: local area, backbone.
  - link-state advertisements only in area
  - each nodes has detailed area topology; only know direction (shortest path) to nets in other areas.
- *area border routers:* "summarize" distances to nets in own area, advertise to other Area Border routers.
- *backbone routers:* run OSPF routing limited to backbone.
- *boundary routers:* connect to other AS's.

Internet inter-AS routing: BGP

- BGP (Border Gateway Protocol): *the* de facto inter-domain routing protocol
  - "glue that holds the Internet together"
- BGP provides each AS a means to:
  - eBGP: obtain subnet reachability information from neighboring ASs.
  - iBGP: propagate reachability information to all AS-internal routers.
  - determine "good" routes to other networks based on reachability information and policy.
- allows subnet to advertise its existence to rest of Internet: *"I am here"*

BGP basics

- BGP session: two BGP routers ("peers") exchange BGP messages:
  - advertising *paths* to different destination network prefixes ("path vector" protocol)
  - exchanged over persistent TCP connections
- when AS3 advertises a prefix to AS1:
  - AS3 *promises* it will forward datagrams towards that prefix
  - AS3 can aggregate prefixes in its advertisement

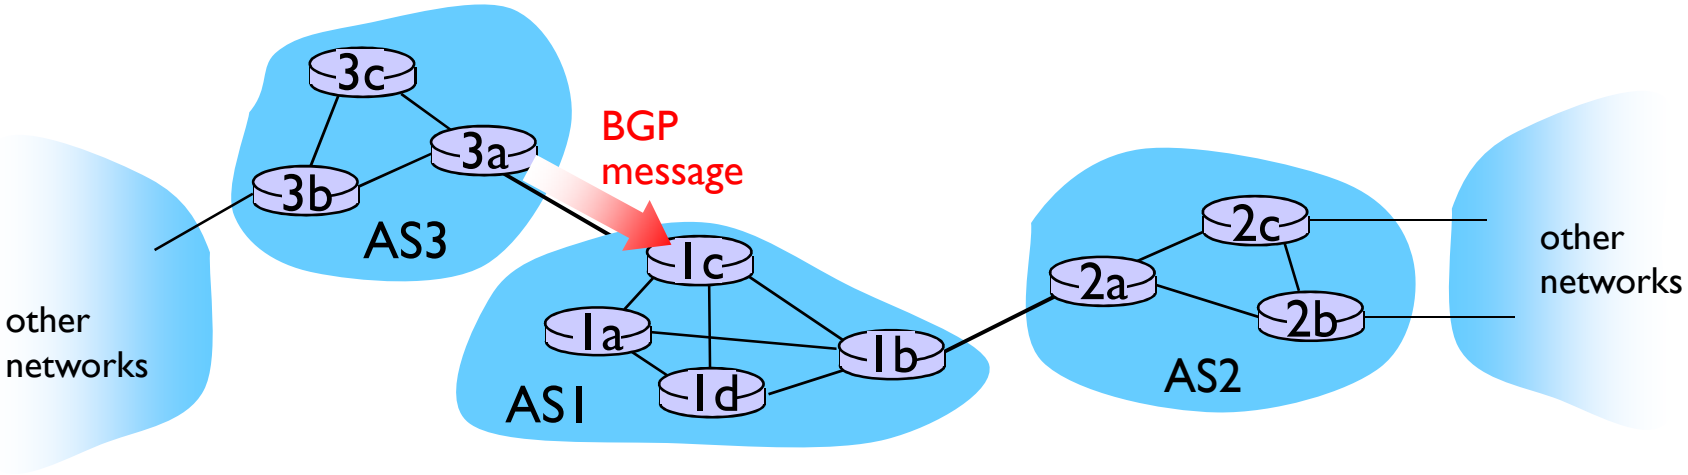

BGP basics: distributing path information

- using eBGP session between 3a and 1c, AS3 sends prefix reachability info to AS1.
  - 1c can then use iBGP to distribute new prefix info to all routers in AS1
  - 1b can then re-advertise new reachability info to AS2 over 1b-to-2a eBGP session
- when router learns of new prefix, it creates entry for prefix in its forwarding table.

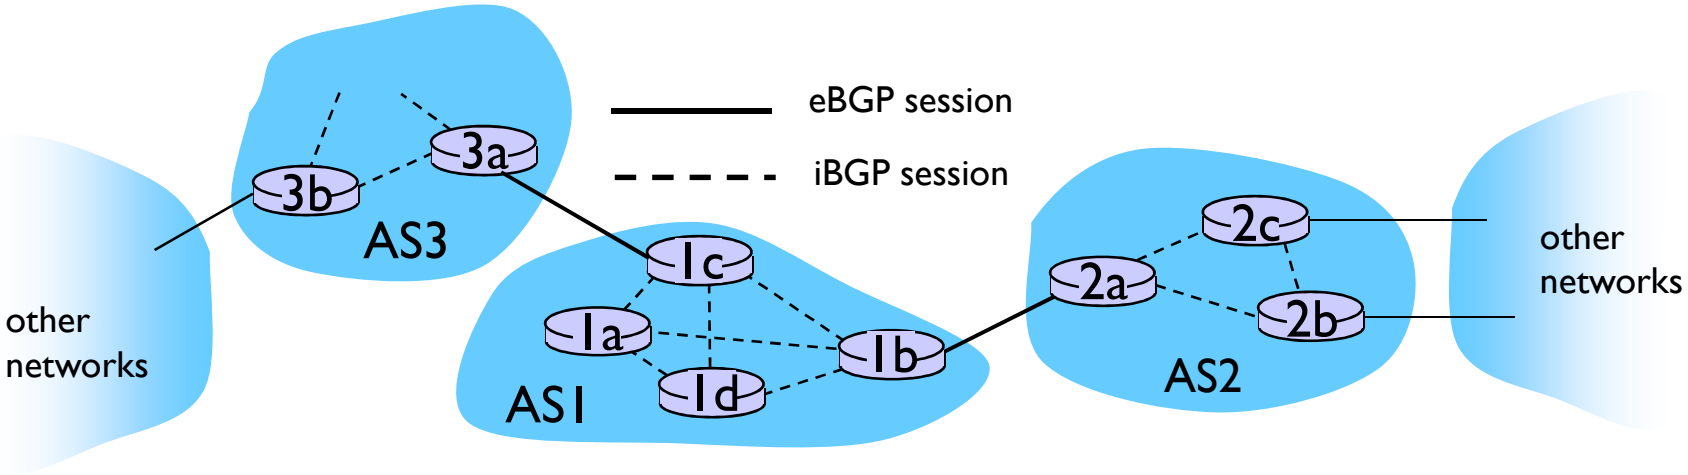

Path attributes & BGP routes

- advertised prefix includes BGP attributes
  - prefix + attributes = "route"
- two important attributes:
  - AS-PATH: contains ASs through which prefix advertisement has passed: e.g., AS 67, AS 17
  - NEXT-HOP: indicates specific internal-AS router to next-hop AS. (may be multiple links from current AS to next-hop-AS)
- gateway router receiving route advertisement uses import policy to accept/decline
  - e.g., never route through AS x
  - *policy-based* routing

BGP route selection

- router may learn about more than 1 route to destination AS, selects route based on:
  1. local preference value attribute: policy decision
  2. shortest AS-PATH
  3. closest NEXT-HOP router: hot potato routing
  4. additional criteria

BGP messages

- BGP messages exchanged between peers over TCP connection
- BGP messages:
  - OPEN: opens TCP connection to peer and authenticates sender
  - UPDATE: advertises new path (or withdraws old)
  - KEEPALIVE: keeps connection alive in absence of UPDATES; also ACKs OPEN request
  - NOTIFICATION: reports errors in previous msg; also used to close connection

BGP routing policy

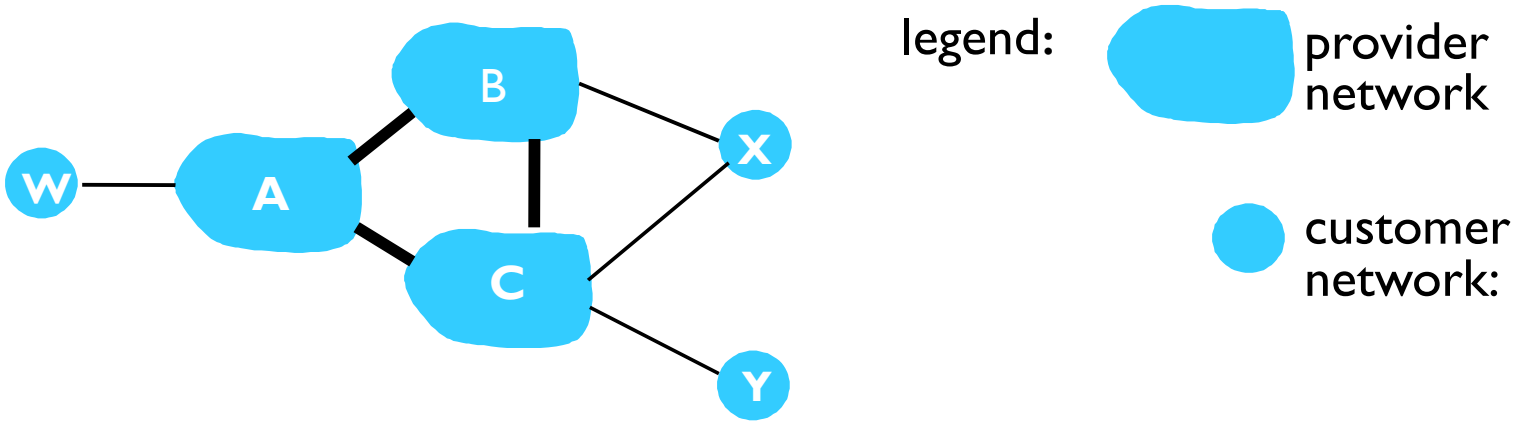

- A,B,C are provider networks
- X,W,Y are customer (of provider networks)
- X is dual-homed: attached to two networks
  - X does not want to route from B via X to C
  - .. so X will not advertise to B a route to C

BGP routing policy (2)

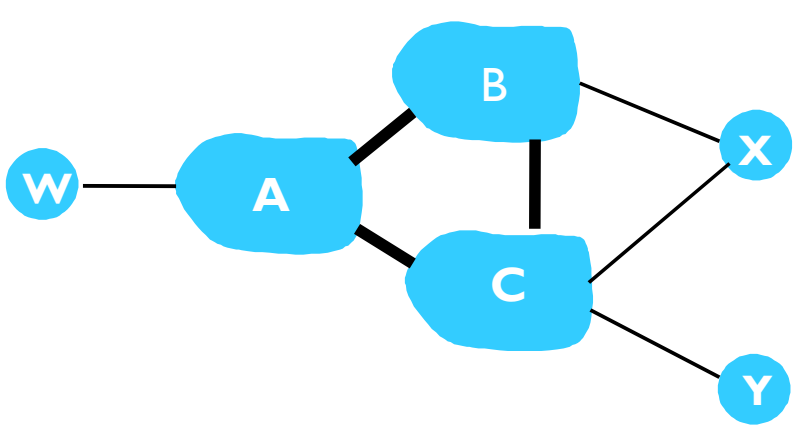

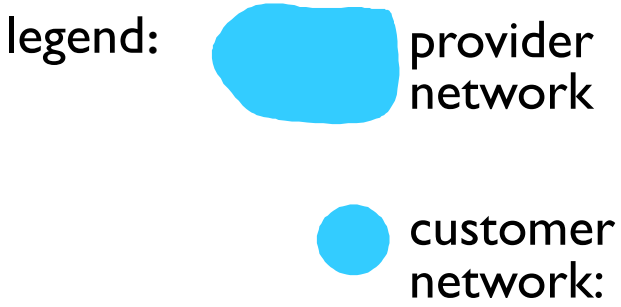

- A advertises path AW to B
- B advertises path BAW to X
- Should B advertise path BAW to C?
  - No way! B gets no "revenue" for routing CBAW since neither W nor C are B's customers
  - B wants to force C to route to w via A
  - B wants to route *only* to/from its customers!

Why different Intra- and Inter-AS routing ?

Policy:

- Inter-AS: admin wants control over how its traffic routed, who routes through its net.
- Intra-AS: single admin, so no policy decisions needed

Scale:

- hierarchical routing saves table size, reduced update traffic

Performance:

- Intra-AS: can focus on performance
- Inter-AS: policy may dominate over performance

Lesson 15: summary

The Routing algorithms we studied in Lesson 14 are used in the internet protocols

- RIP - distance vector
- OSPF – Link state and Hierarchical routing
- eBGP - Hierarchical routing across AS's
- iBGP – routing within a single AS to determine path to the AS boundary