CS450 Computer Networks

The slides used in class are derived from the slides available on our text book companion website:
http://wps.pearsoned.com/ecs_kurose_compnetw_6/

CS450 Computer Networks
Lesson 13
Network Layer – Internet Protocol

The emergence of three from one – knower, known, and process of knowing.

Lesson 13: Network Layer – Internet Protocol

- Our goal: understand IP, the Internet Protocol
  - Datagram format
  - IPv4 addressing, DHCP, NAT
  - IPv6

The Internet network layer

host, router network layer functions:

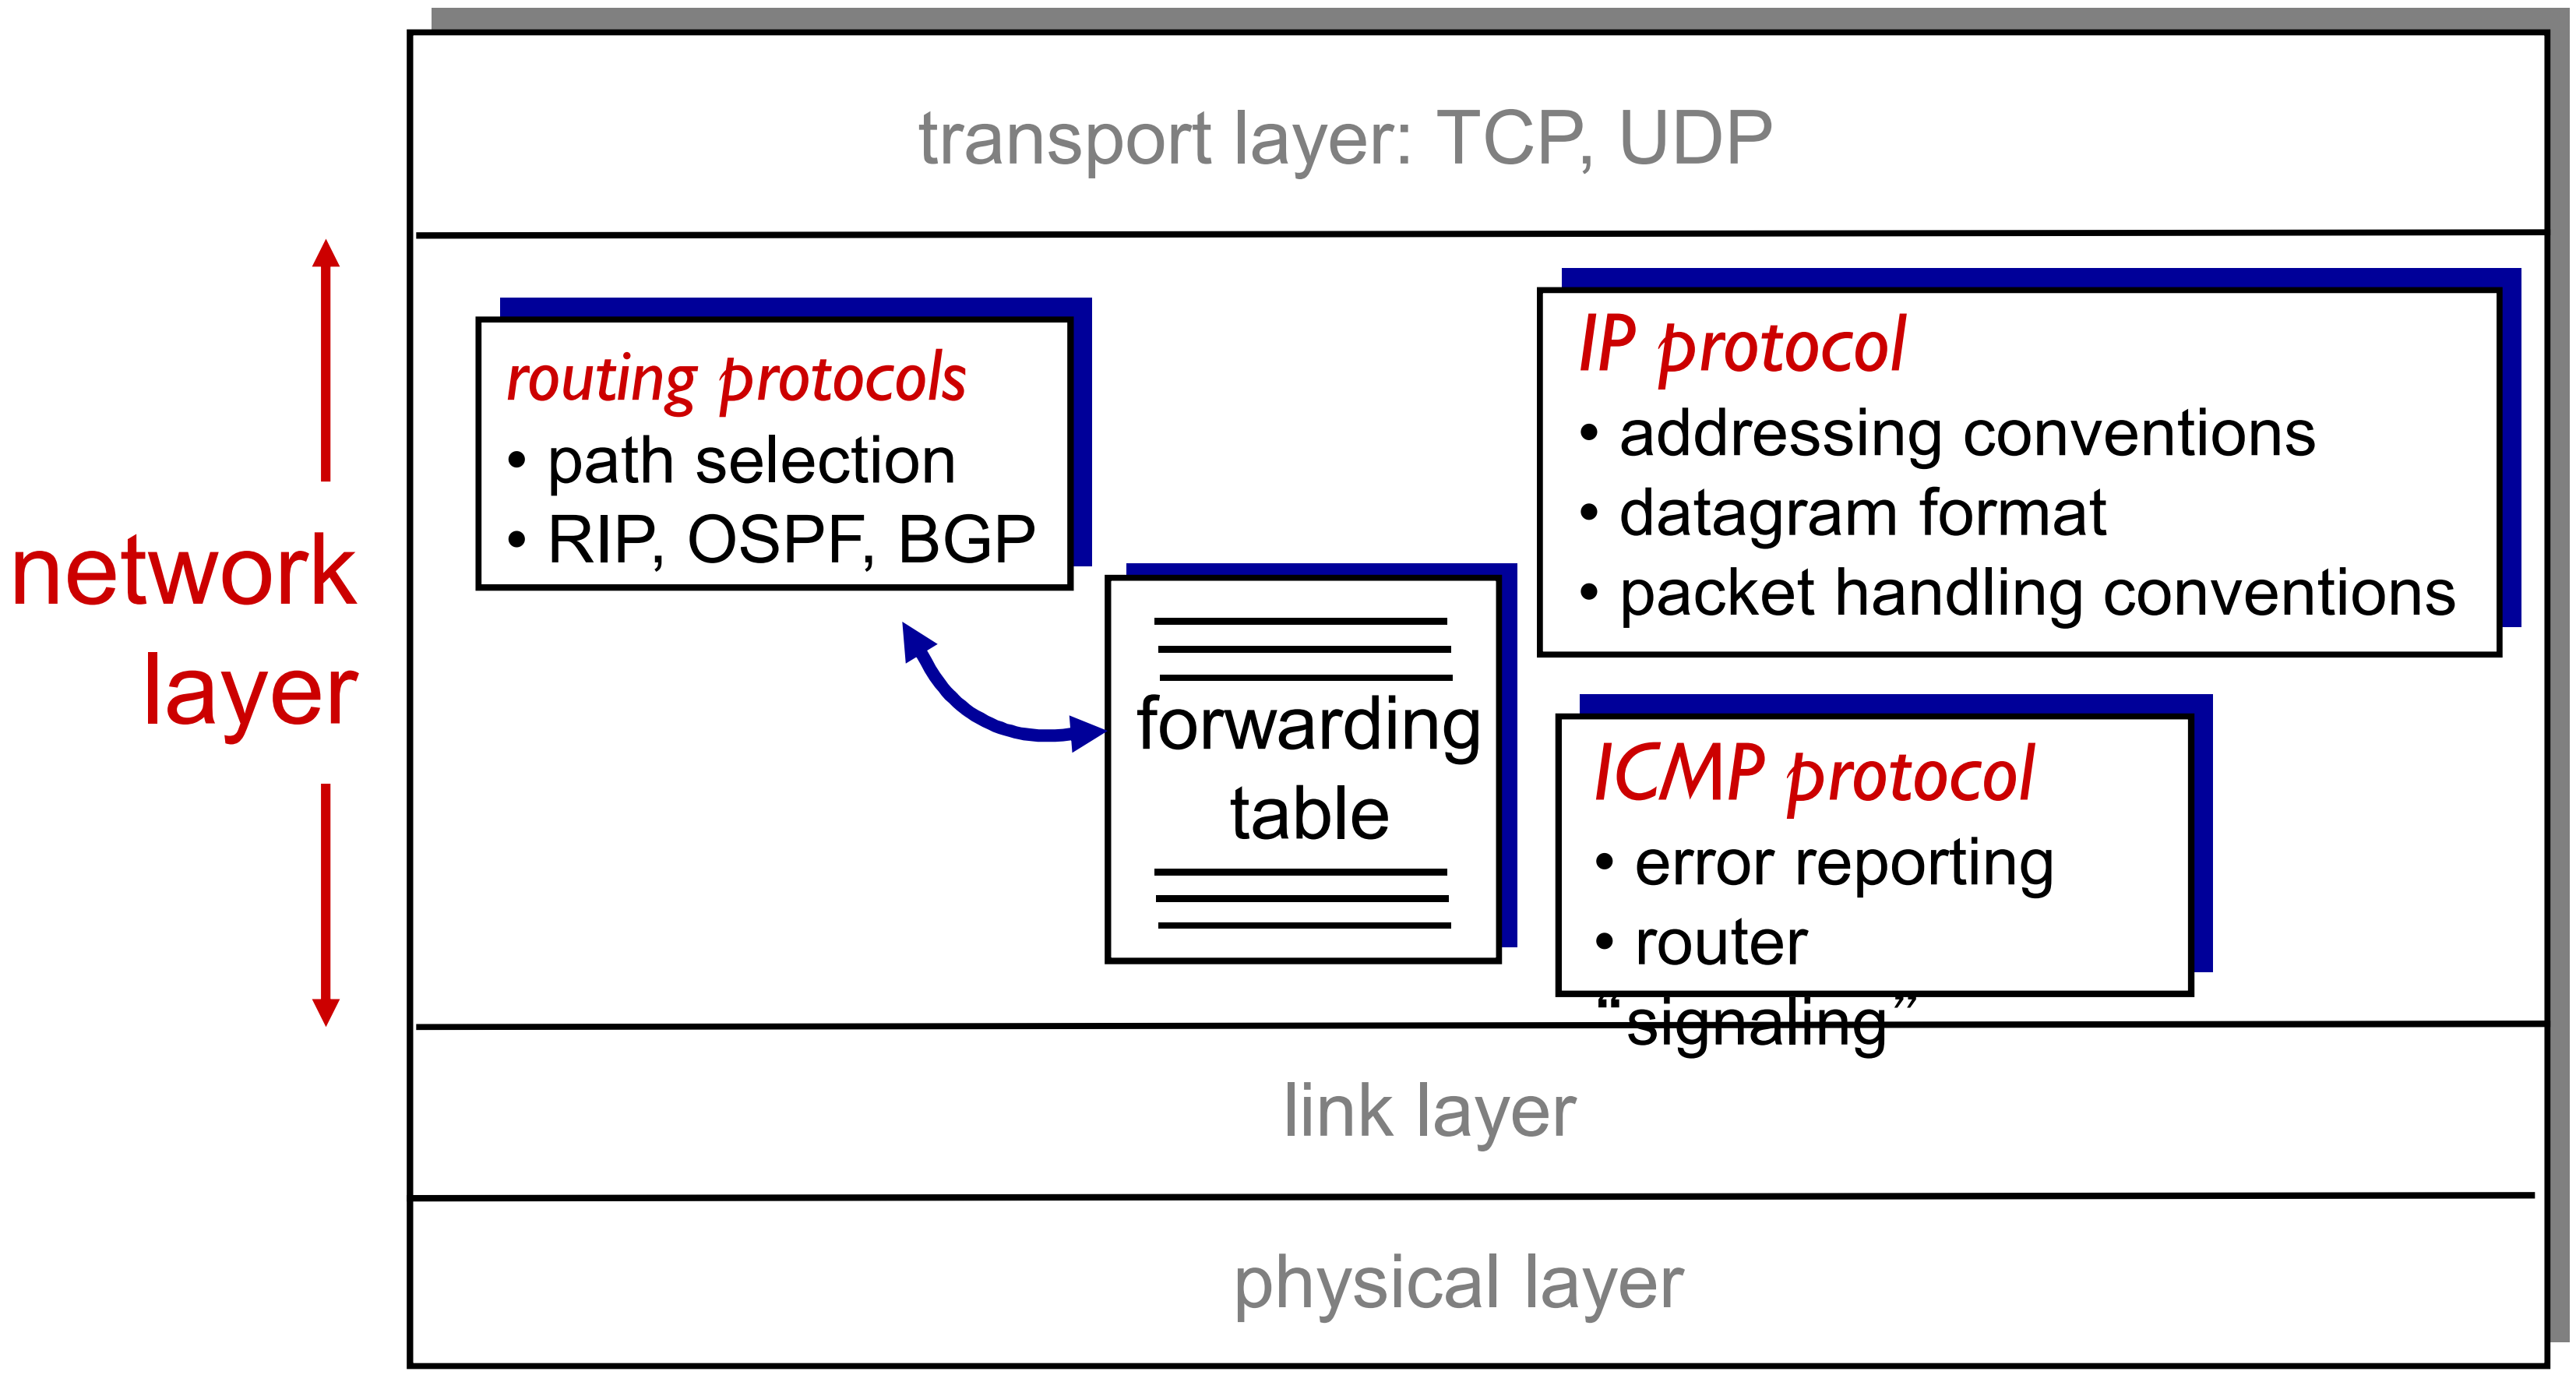

IP datagram format

IP protocol version number

header length (bytes)

"type" of data

max number remaining hops (decremented at each router)

upper layer protocol to deliver payload to

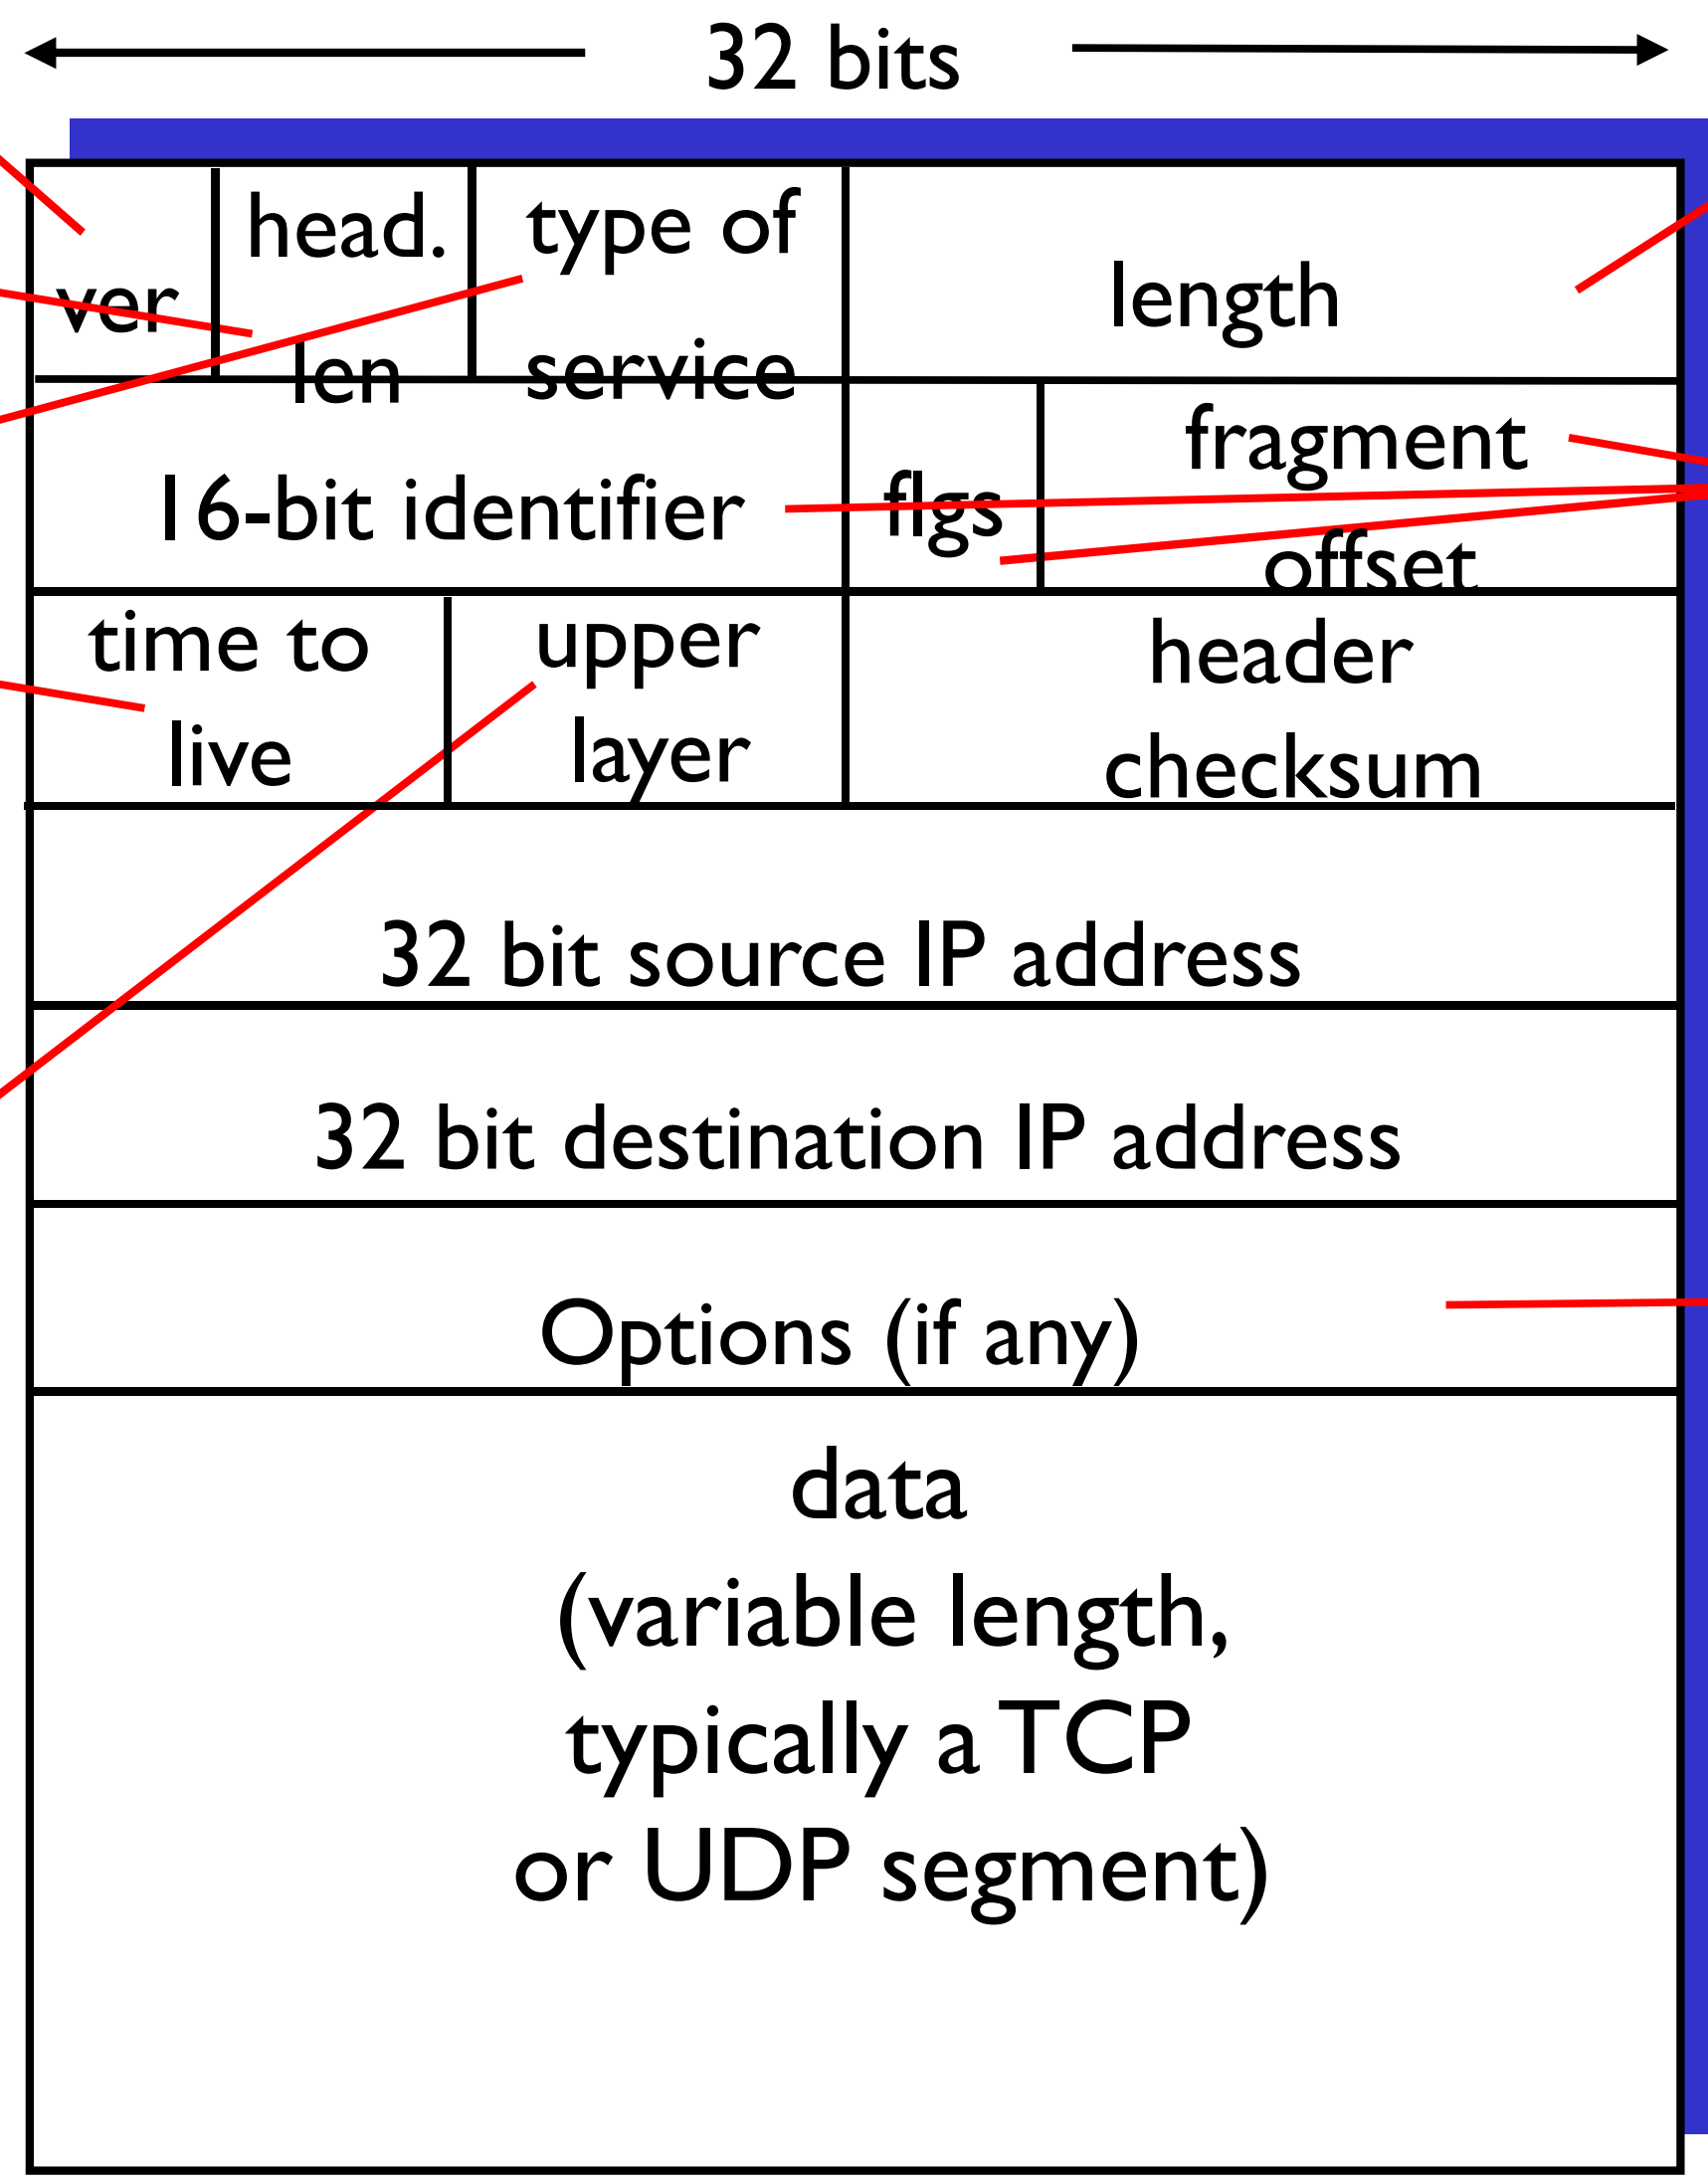

total datagram length (bytes)

for fragmentation/ reassembly

E.g. timestamp, record route taken, specify list of routers to visit.

<u>how much overhead with TCP?</u>

- 20 bytes of TCP
- 20 bytes of IP
- = 40 bytes + app layer overhead

IP Fragmentation & Reassembly

- network links have MTU (max.transfer size) - largest possible link-level frame.
  - different link types, different MTUs
- large IP datagram divided ("fragmented") within net
  - one datagram becomes several datagrams
  - "reassembled" only at final destination
  - IP header bits used to identify, order related fragments

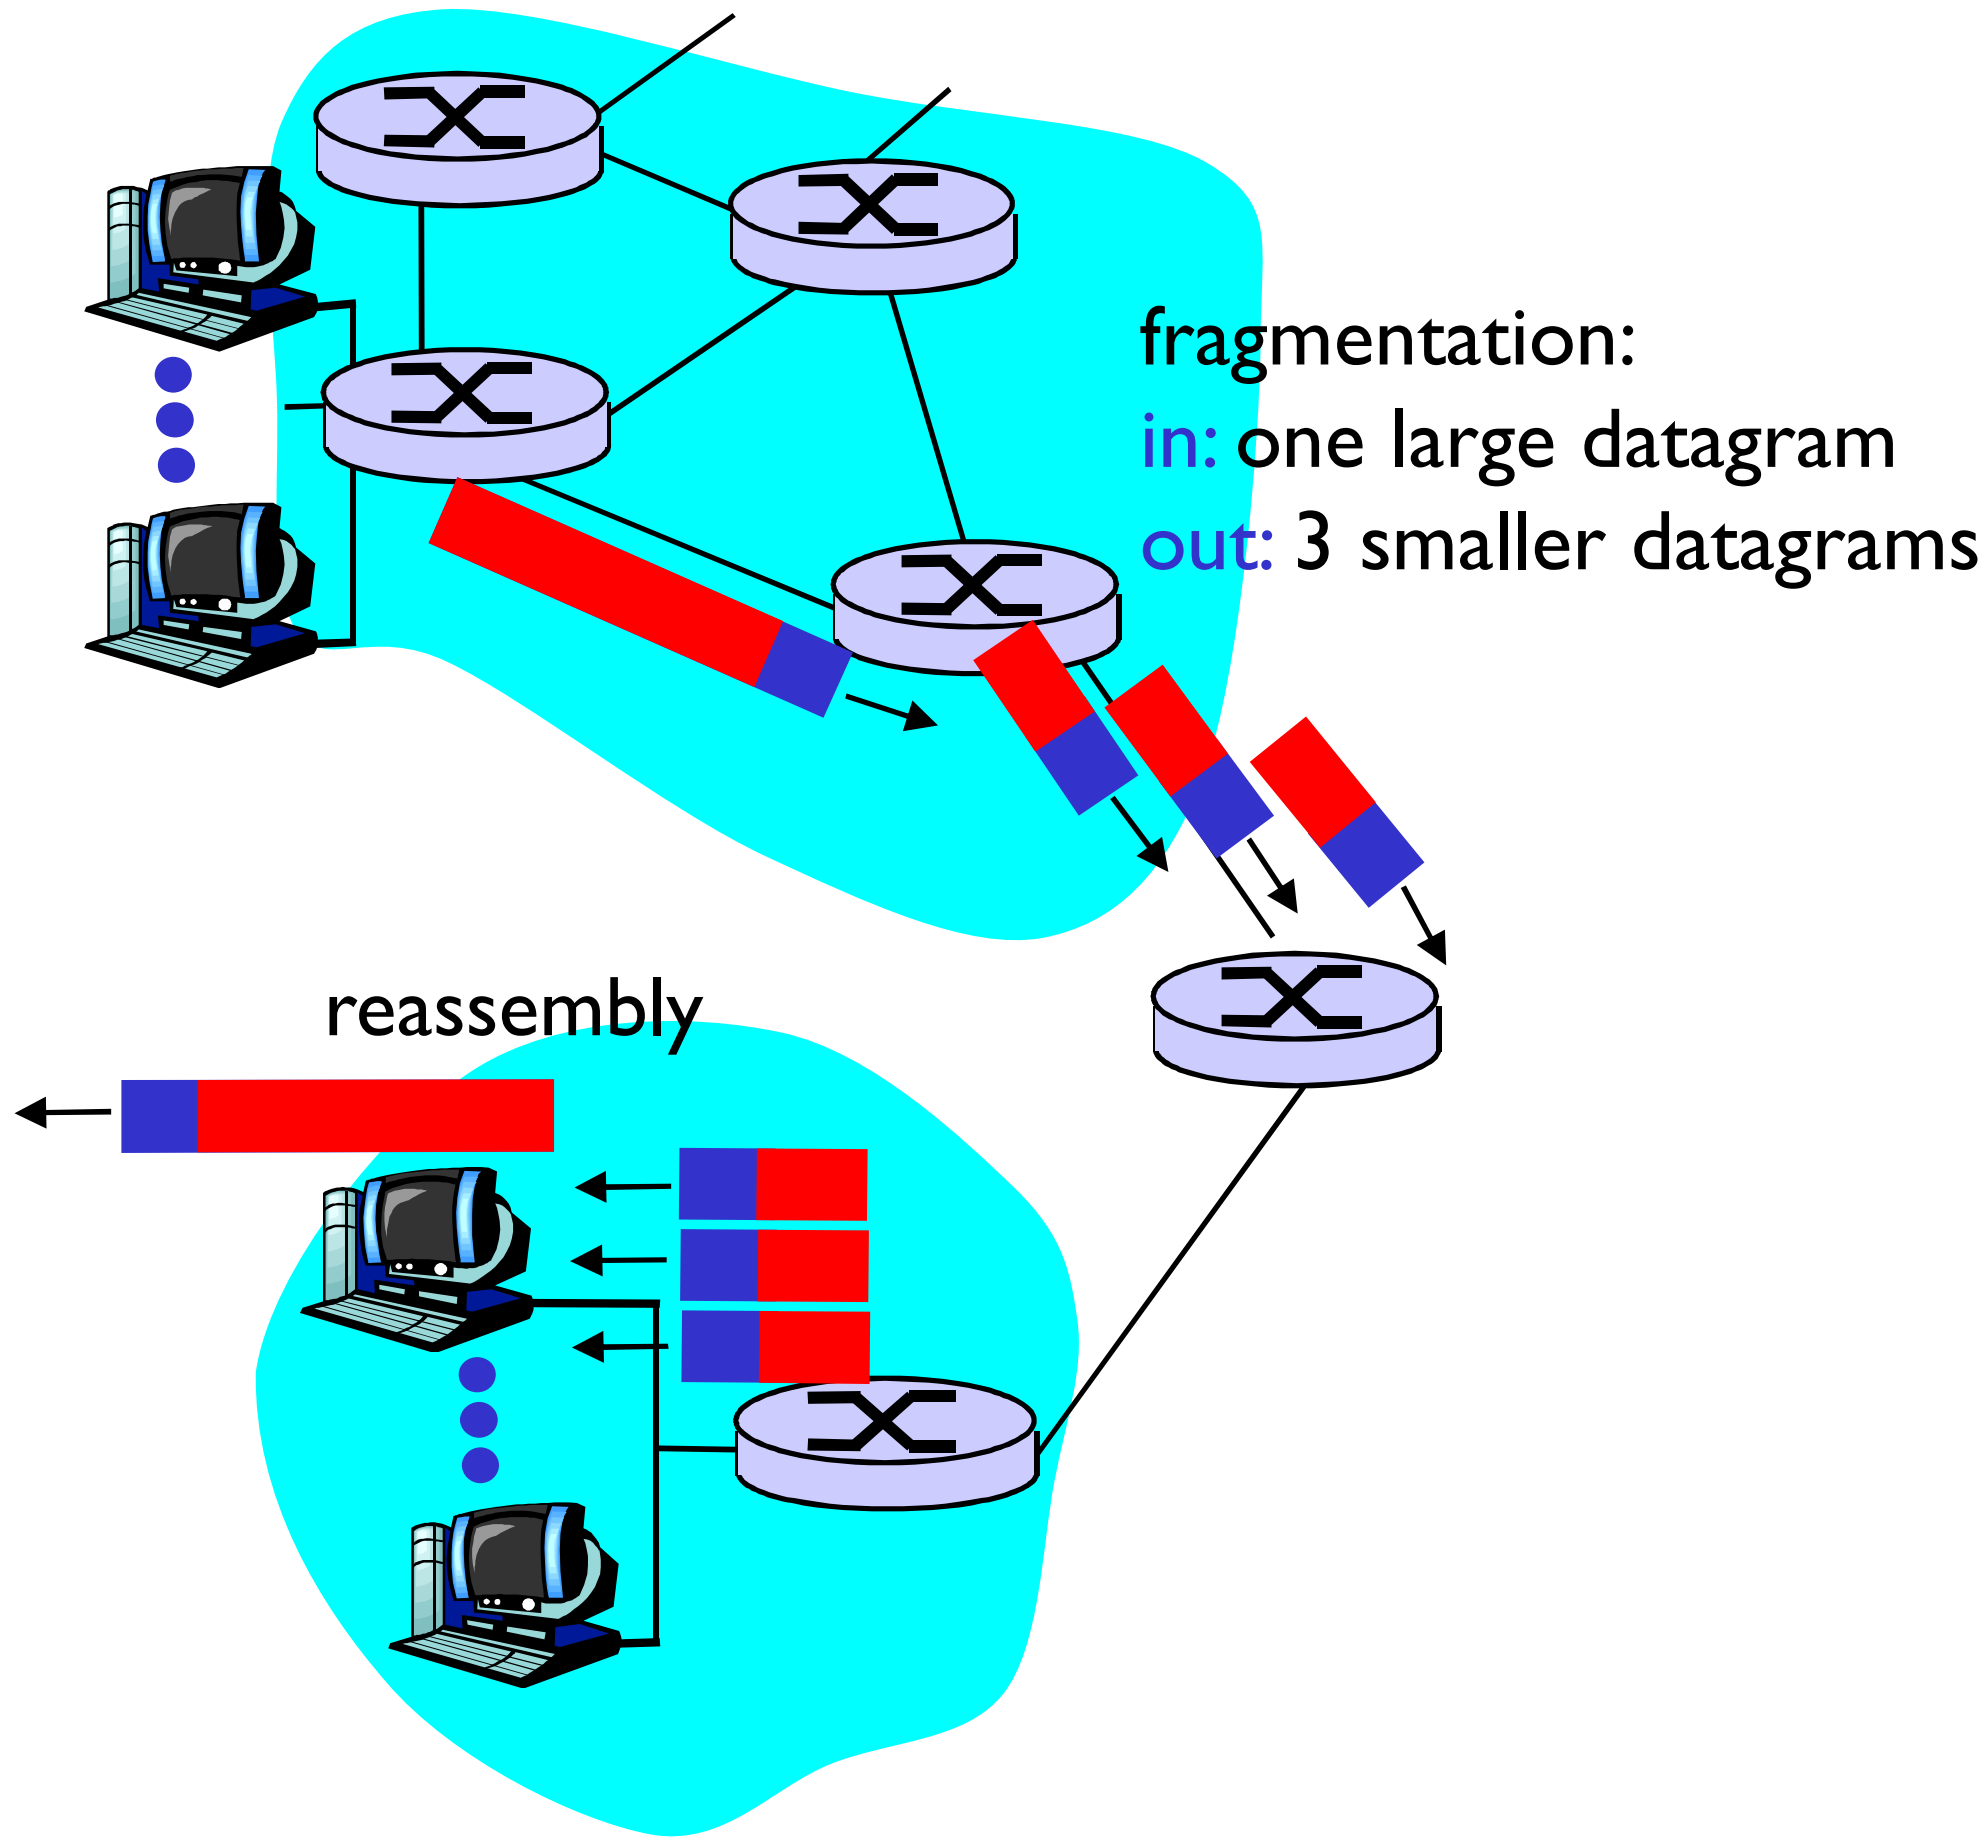

IP Fragmentation and Reassembly

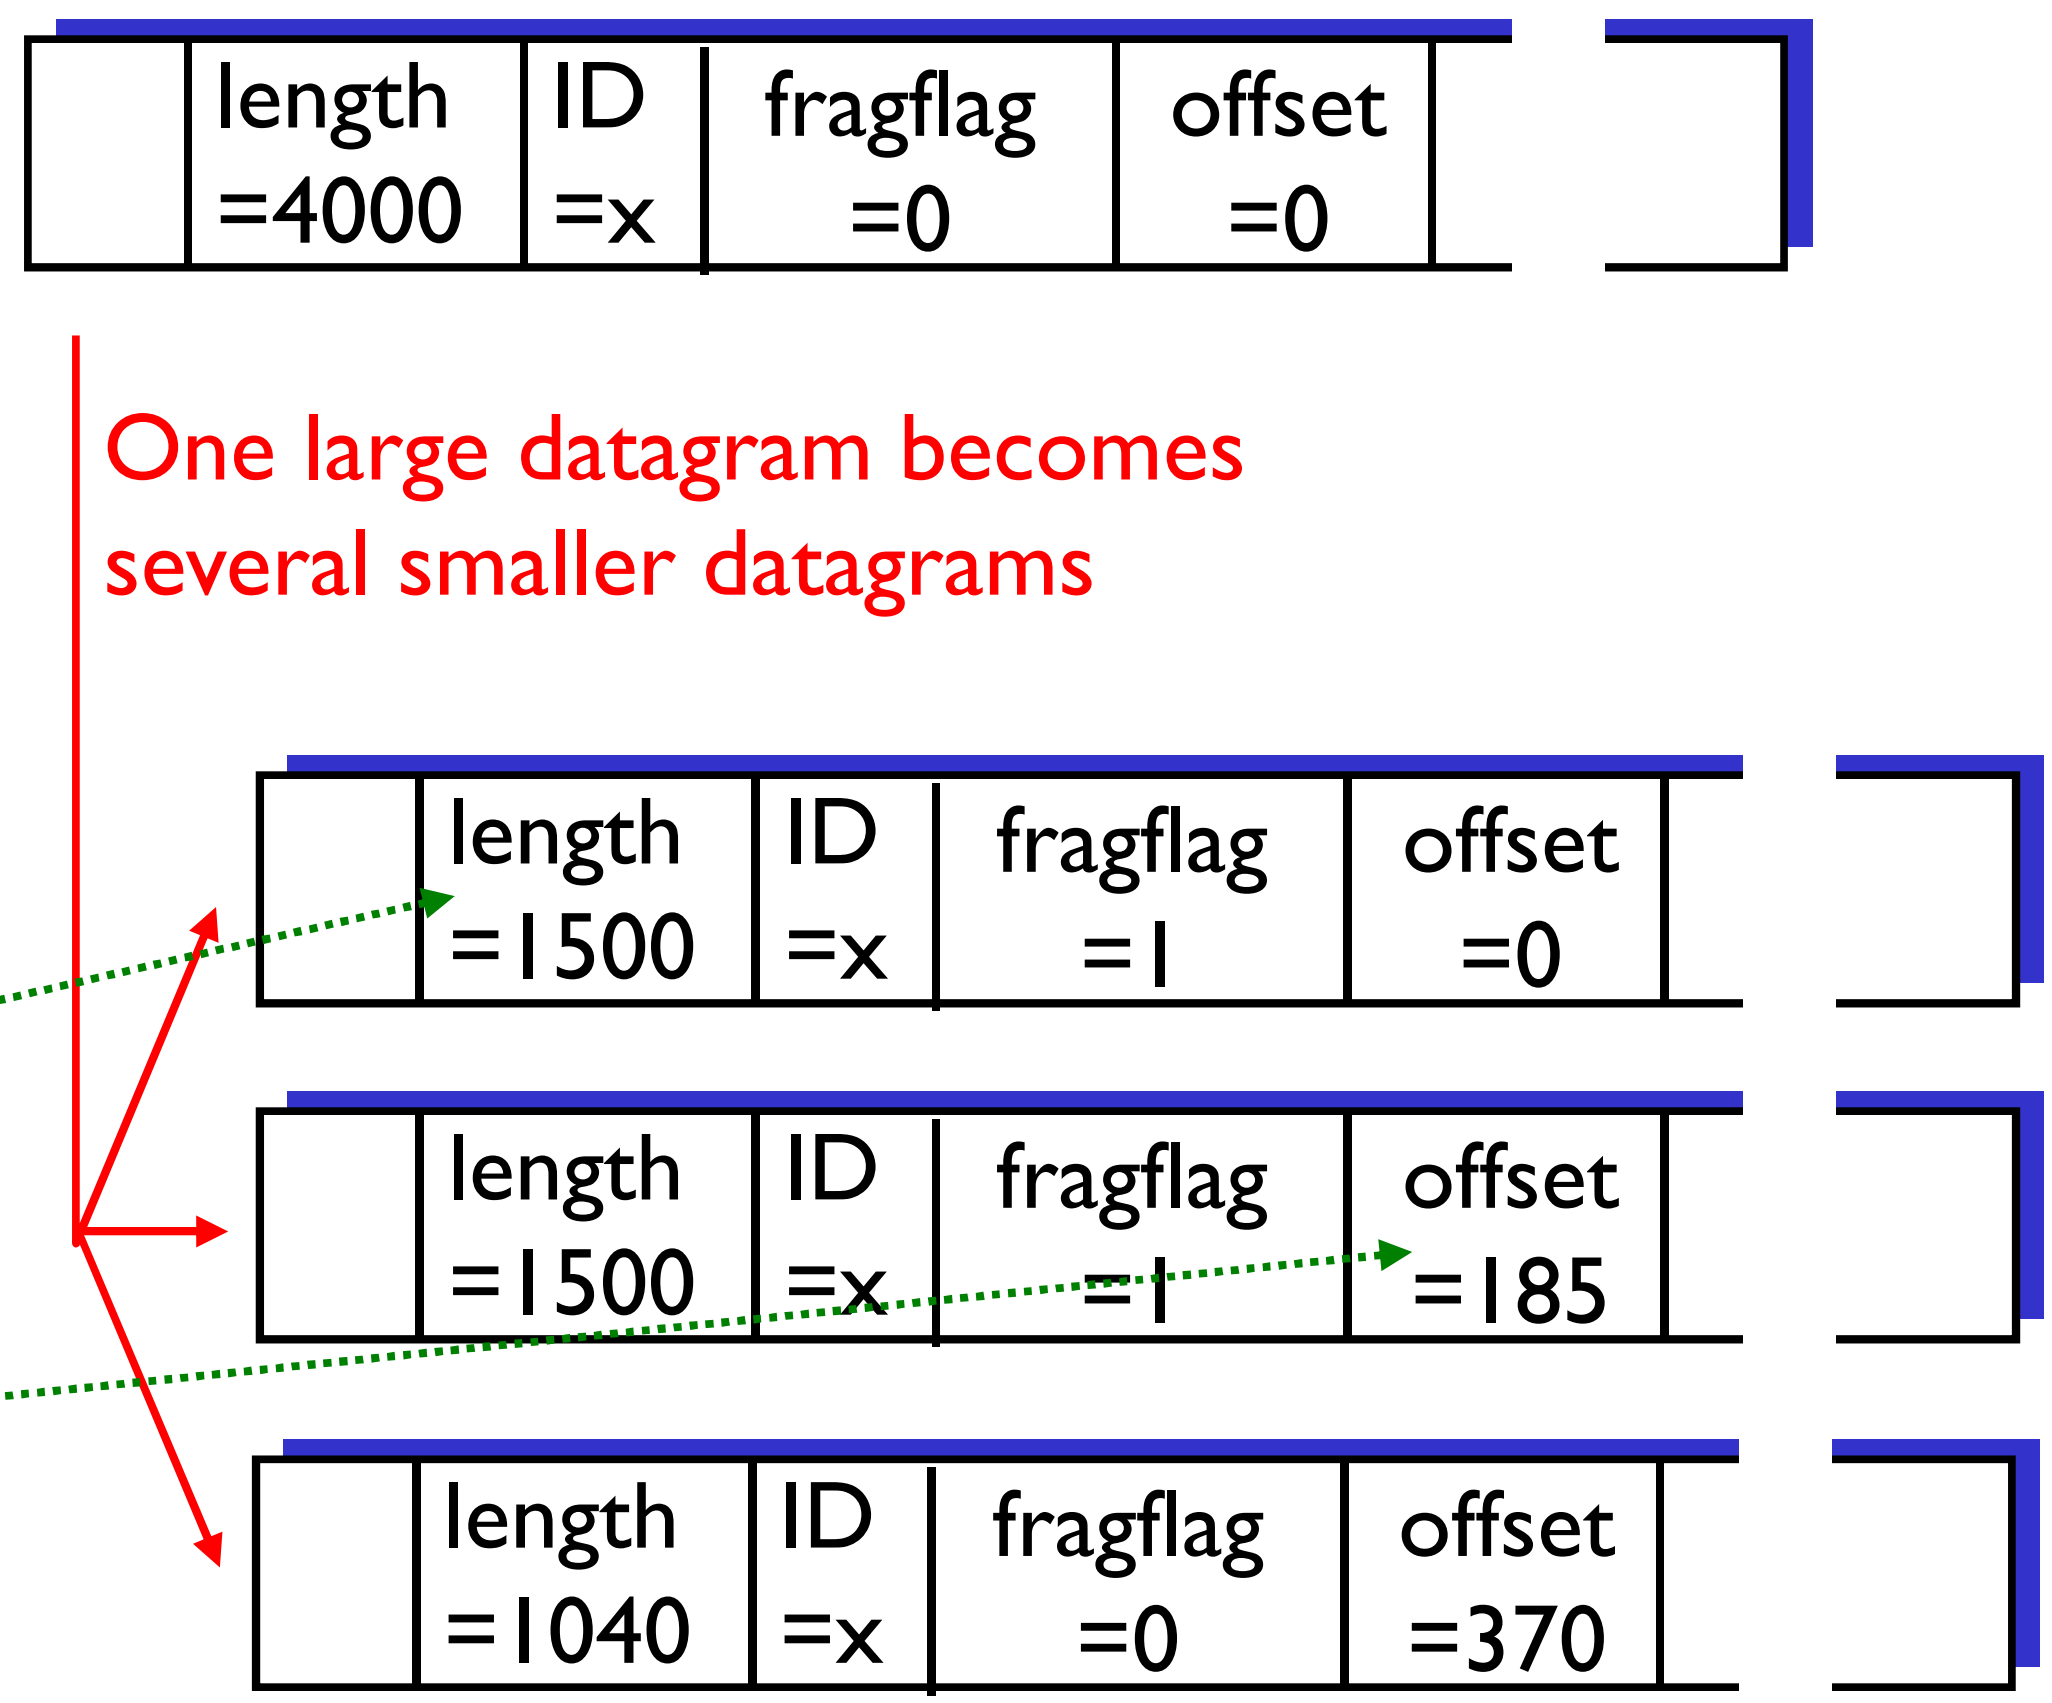

Example

- 4000 byte datagram
- MTU = 1500 bytes

1480 bytes in data field

offset = 1480/8

IP Fragmentation Demo

applet showing fragmentation:

http://media.pearsoncmg.com/aw/aw_kurose_network_2/applets/ip/ipfragmentation.html

IP Addressing: introduction

- IP address: 32-bit identifier for host, router *interface*
- *interface:* connection between host/router and physical link
  - router's typically have multiple interfaces
  - host typically has one interface
  - IP addresses associated with each interface

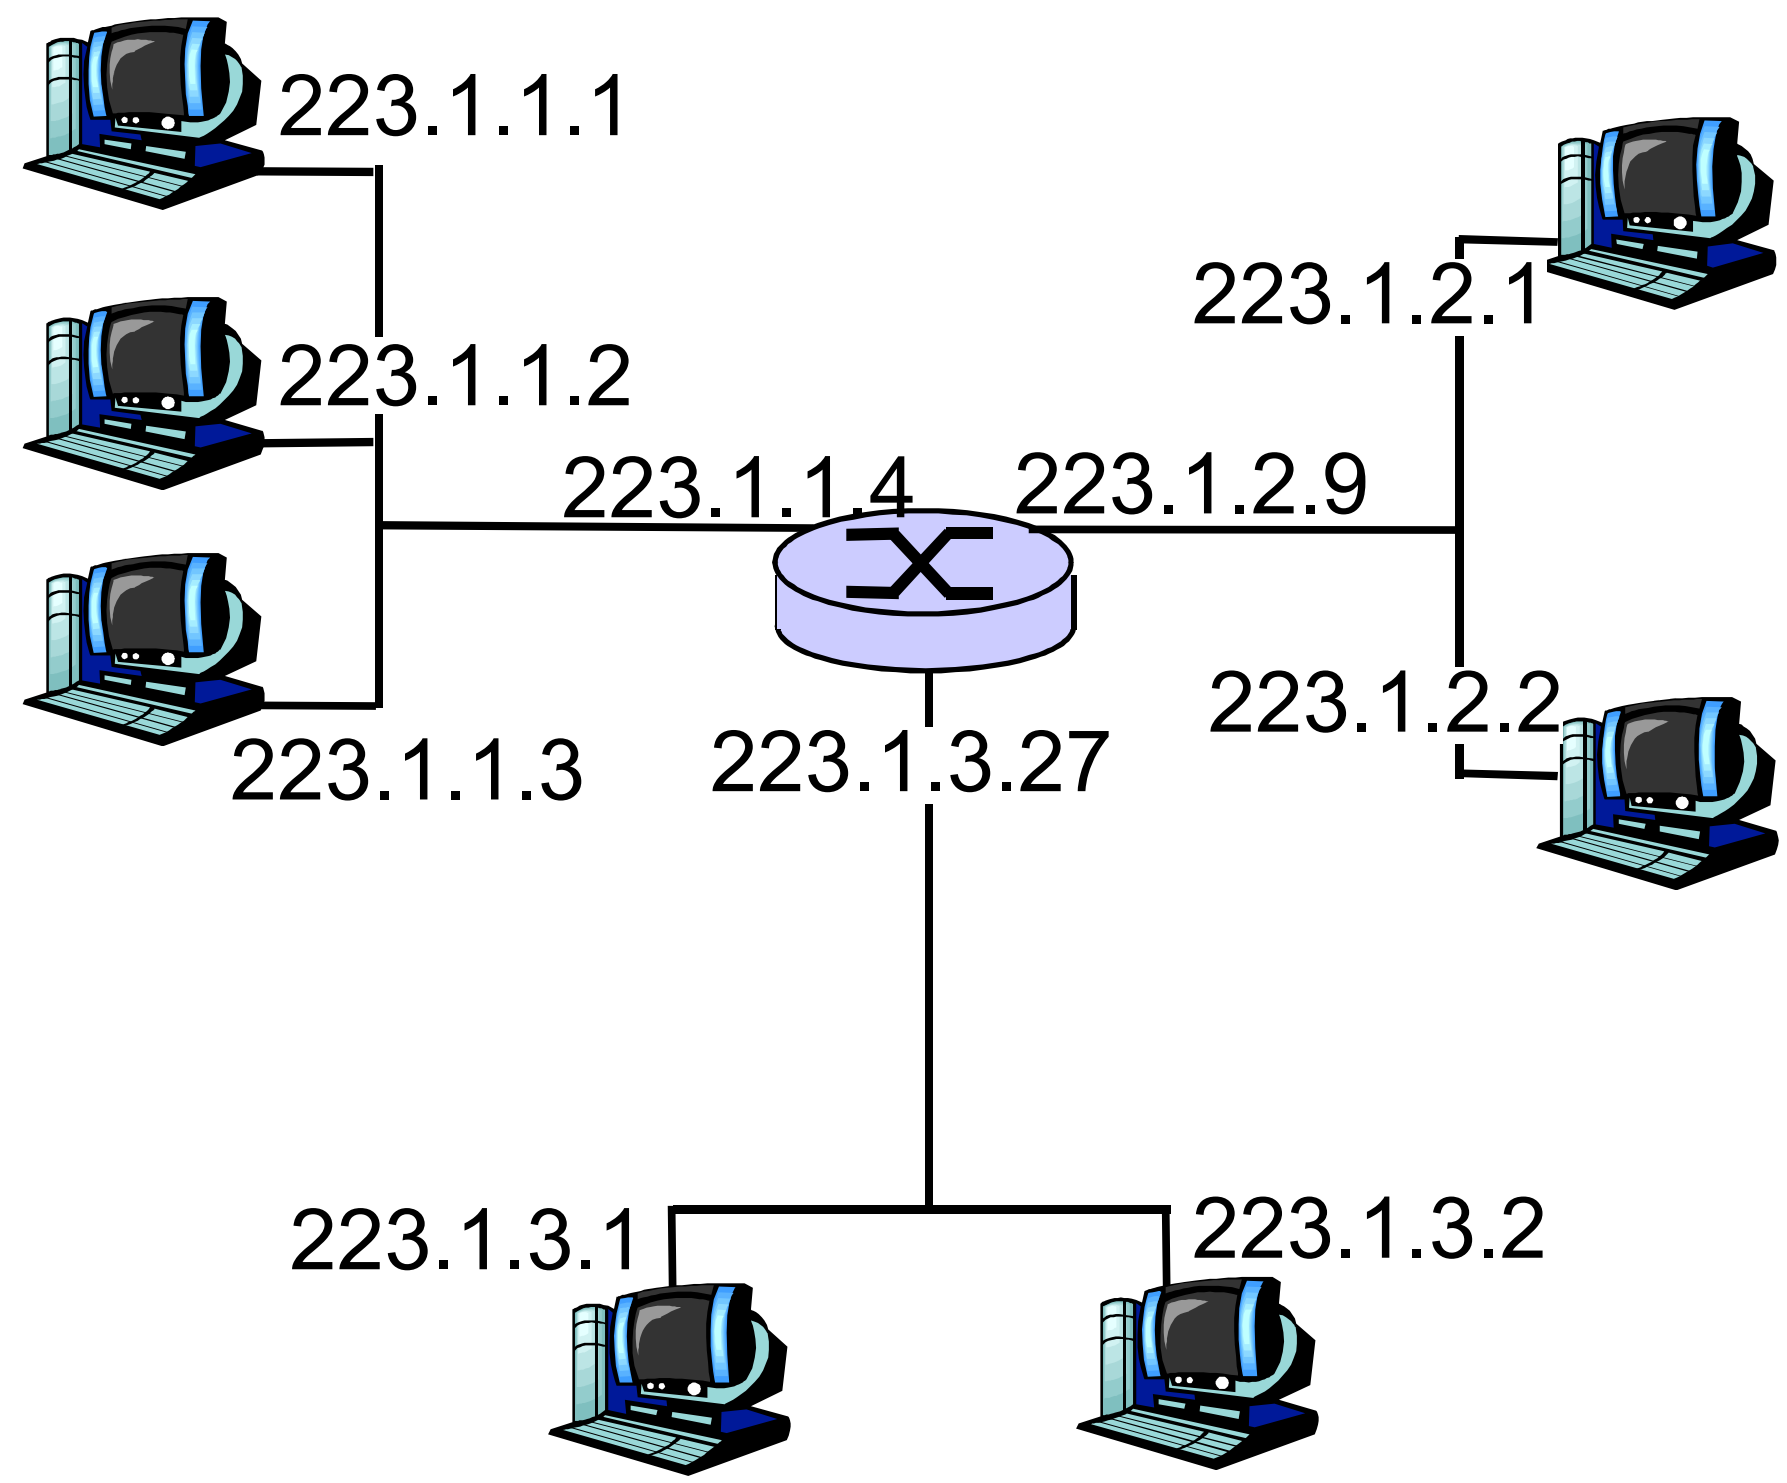

$$223.1.1.1 = \underbrace{11011111}_{223}\ \underbrace{00000001}_{1}\ \underbrace{00000001}_{1}\ \underbrace{00000001}_{1}$$

Subnets

- IP address:
  - subnet part (high order bits)
  - host part (low order bits)
- *What's a subnet ?*
  - device interfaces with same subnet part of IP address
  - can physically reach each other ***without intervening router***

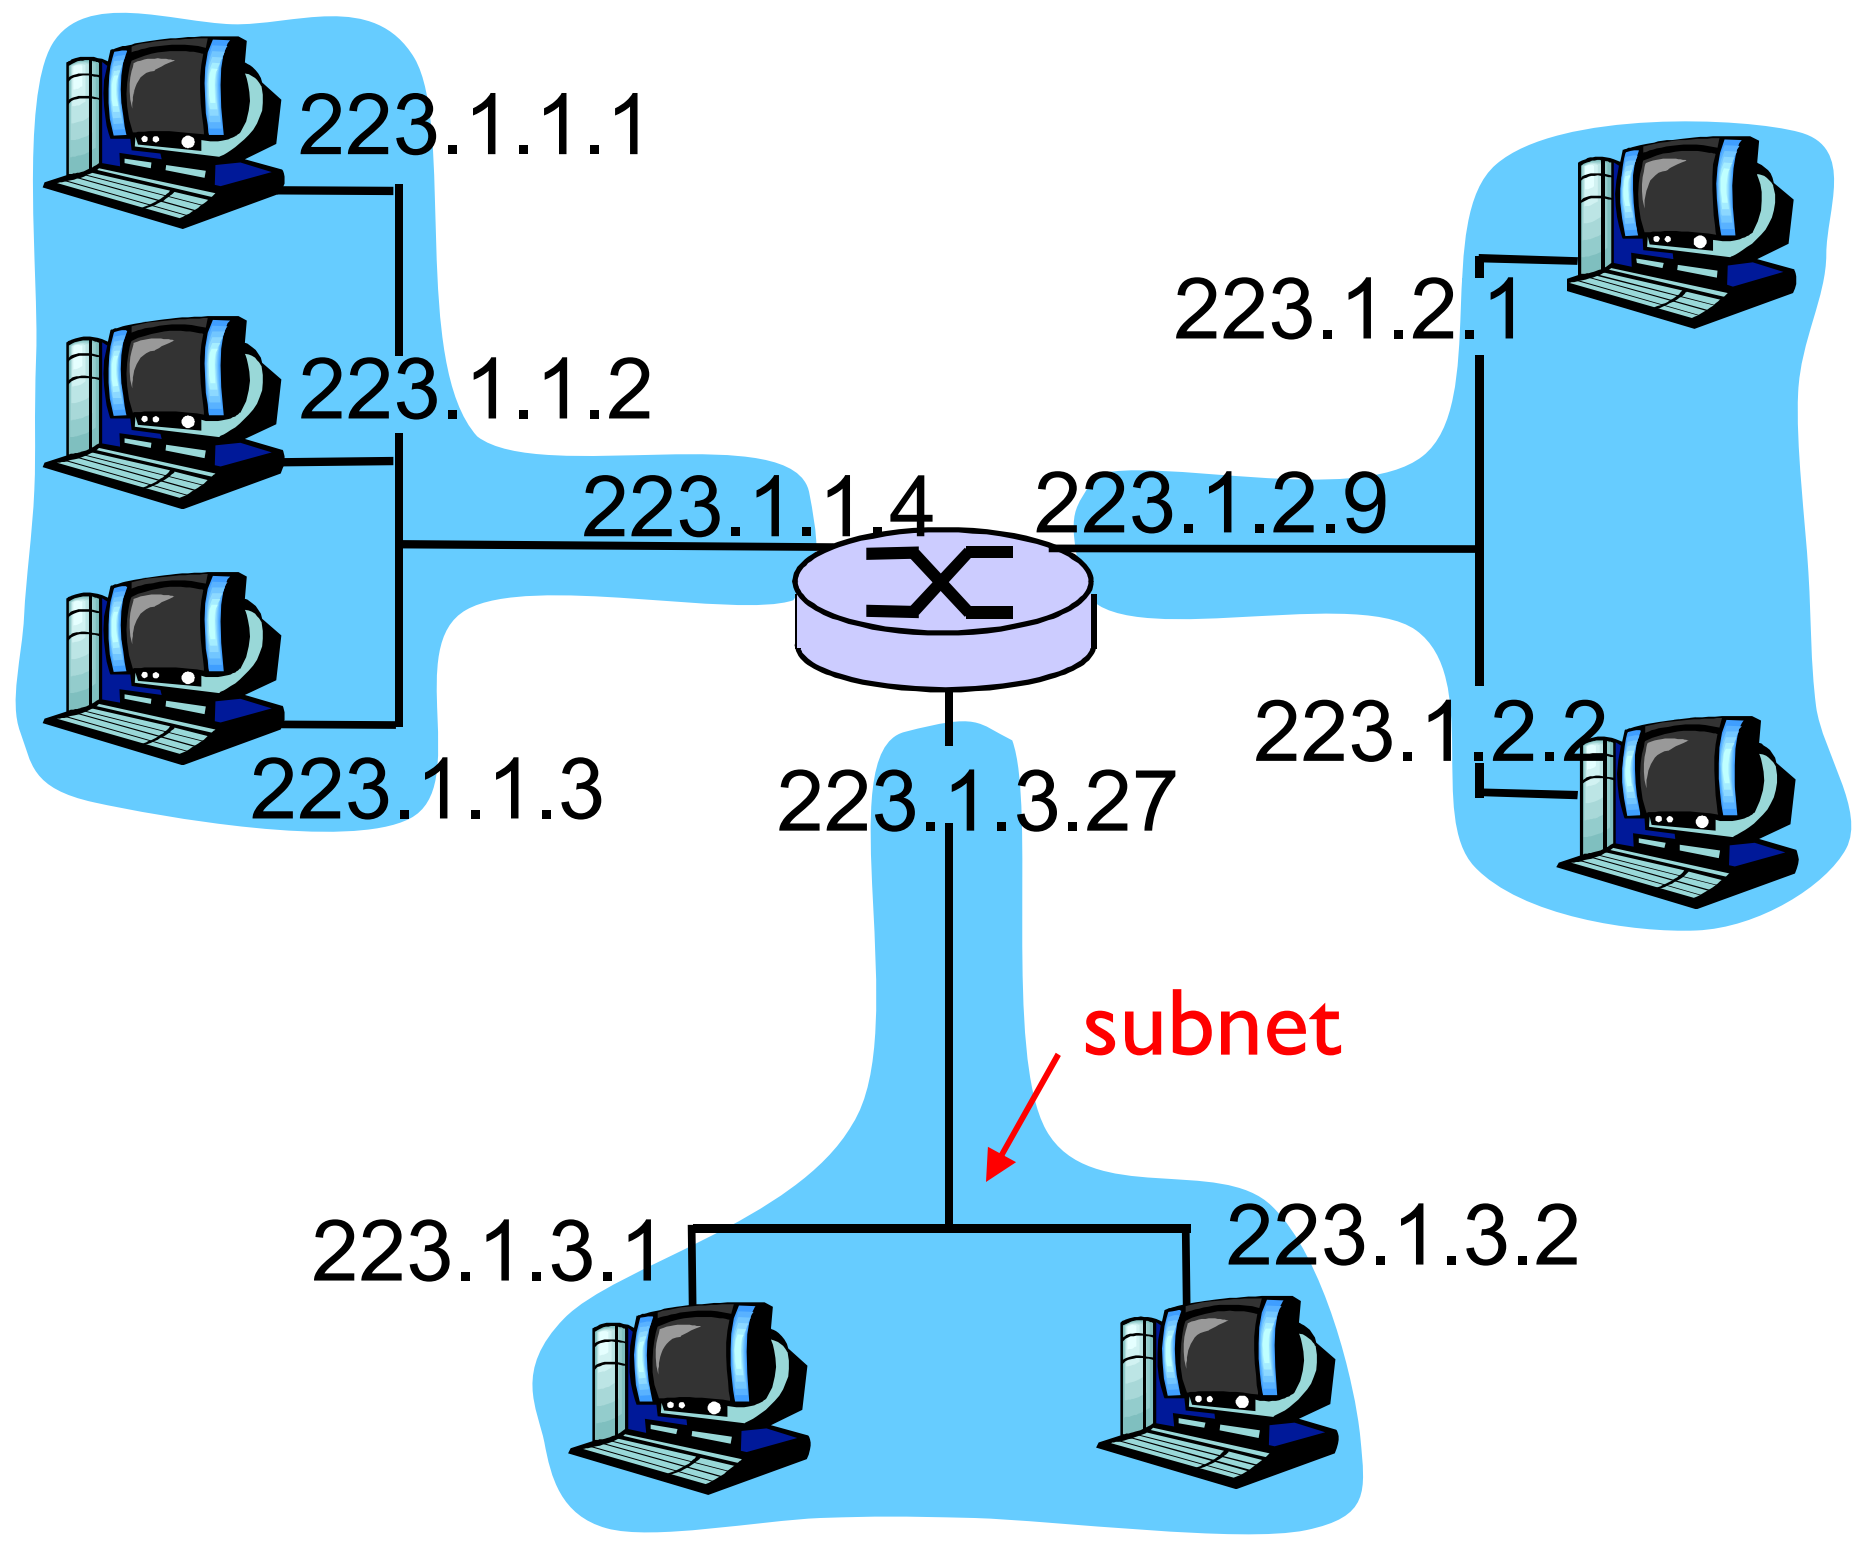

network consisting of 3 subnets

Subnets

Recipe

- to determine the subnets, detach each interface from its host or router, creating islands of isolated networks
- each isolated network is called a subnet.

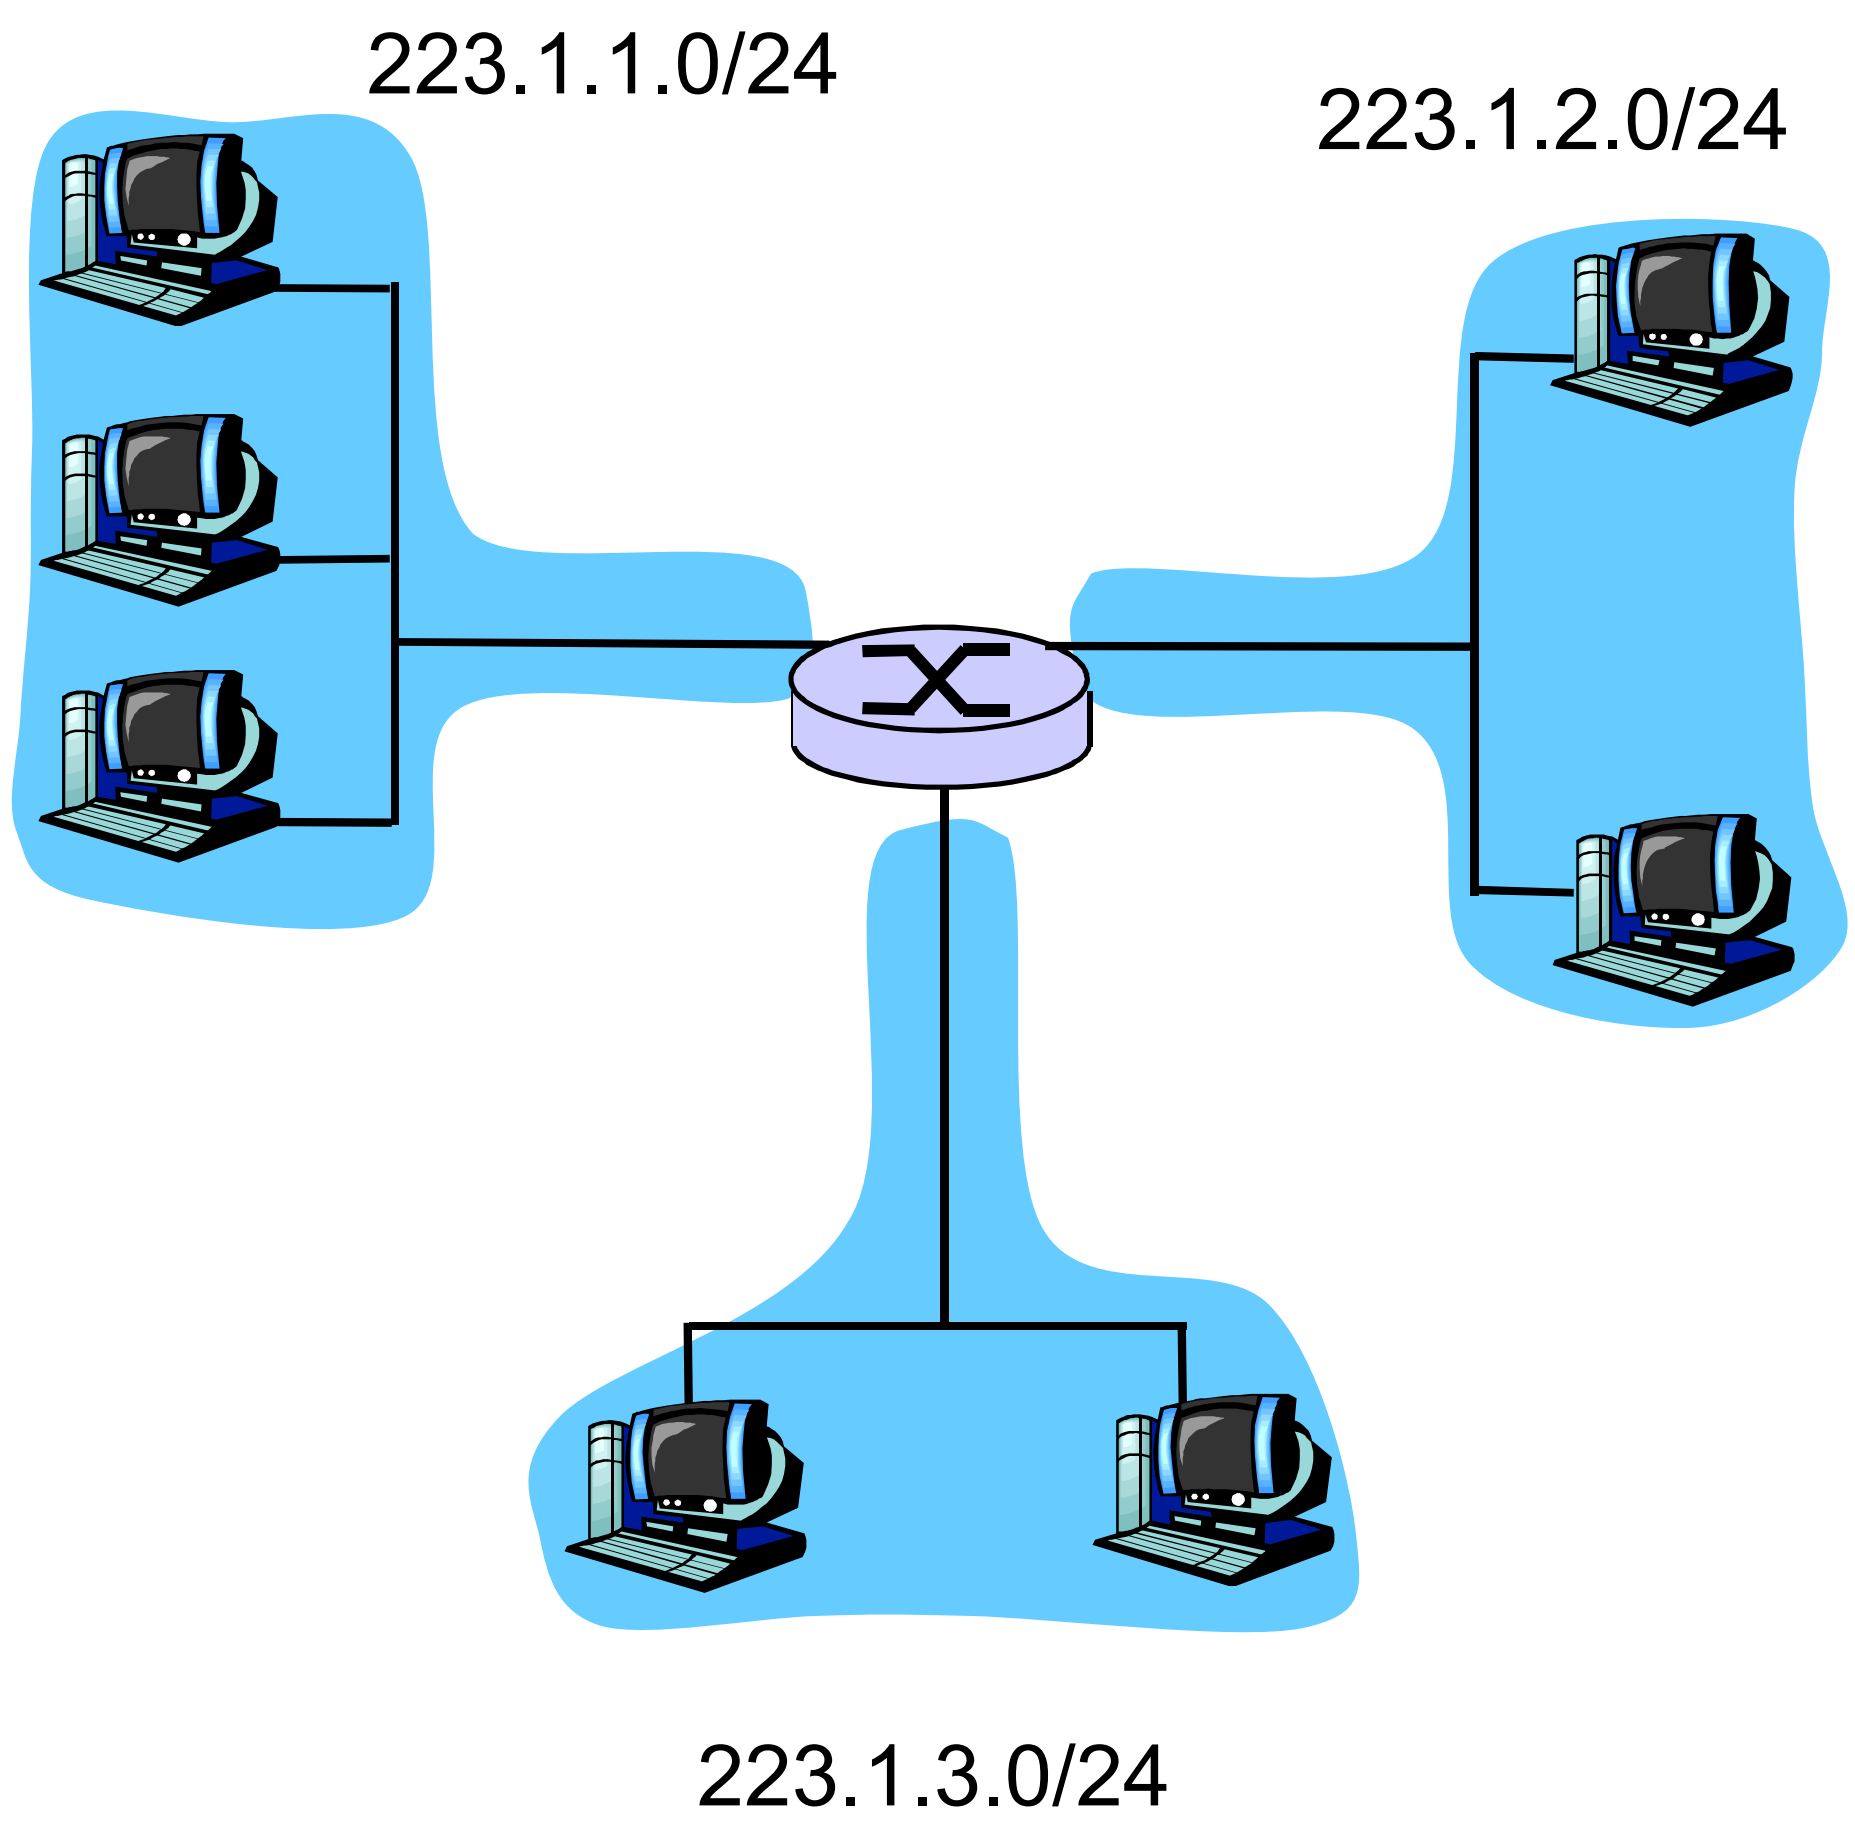

Subnet mask: /24

Subnets

How many?

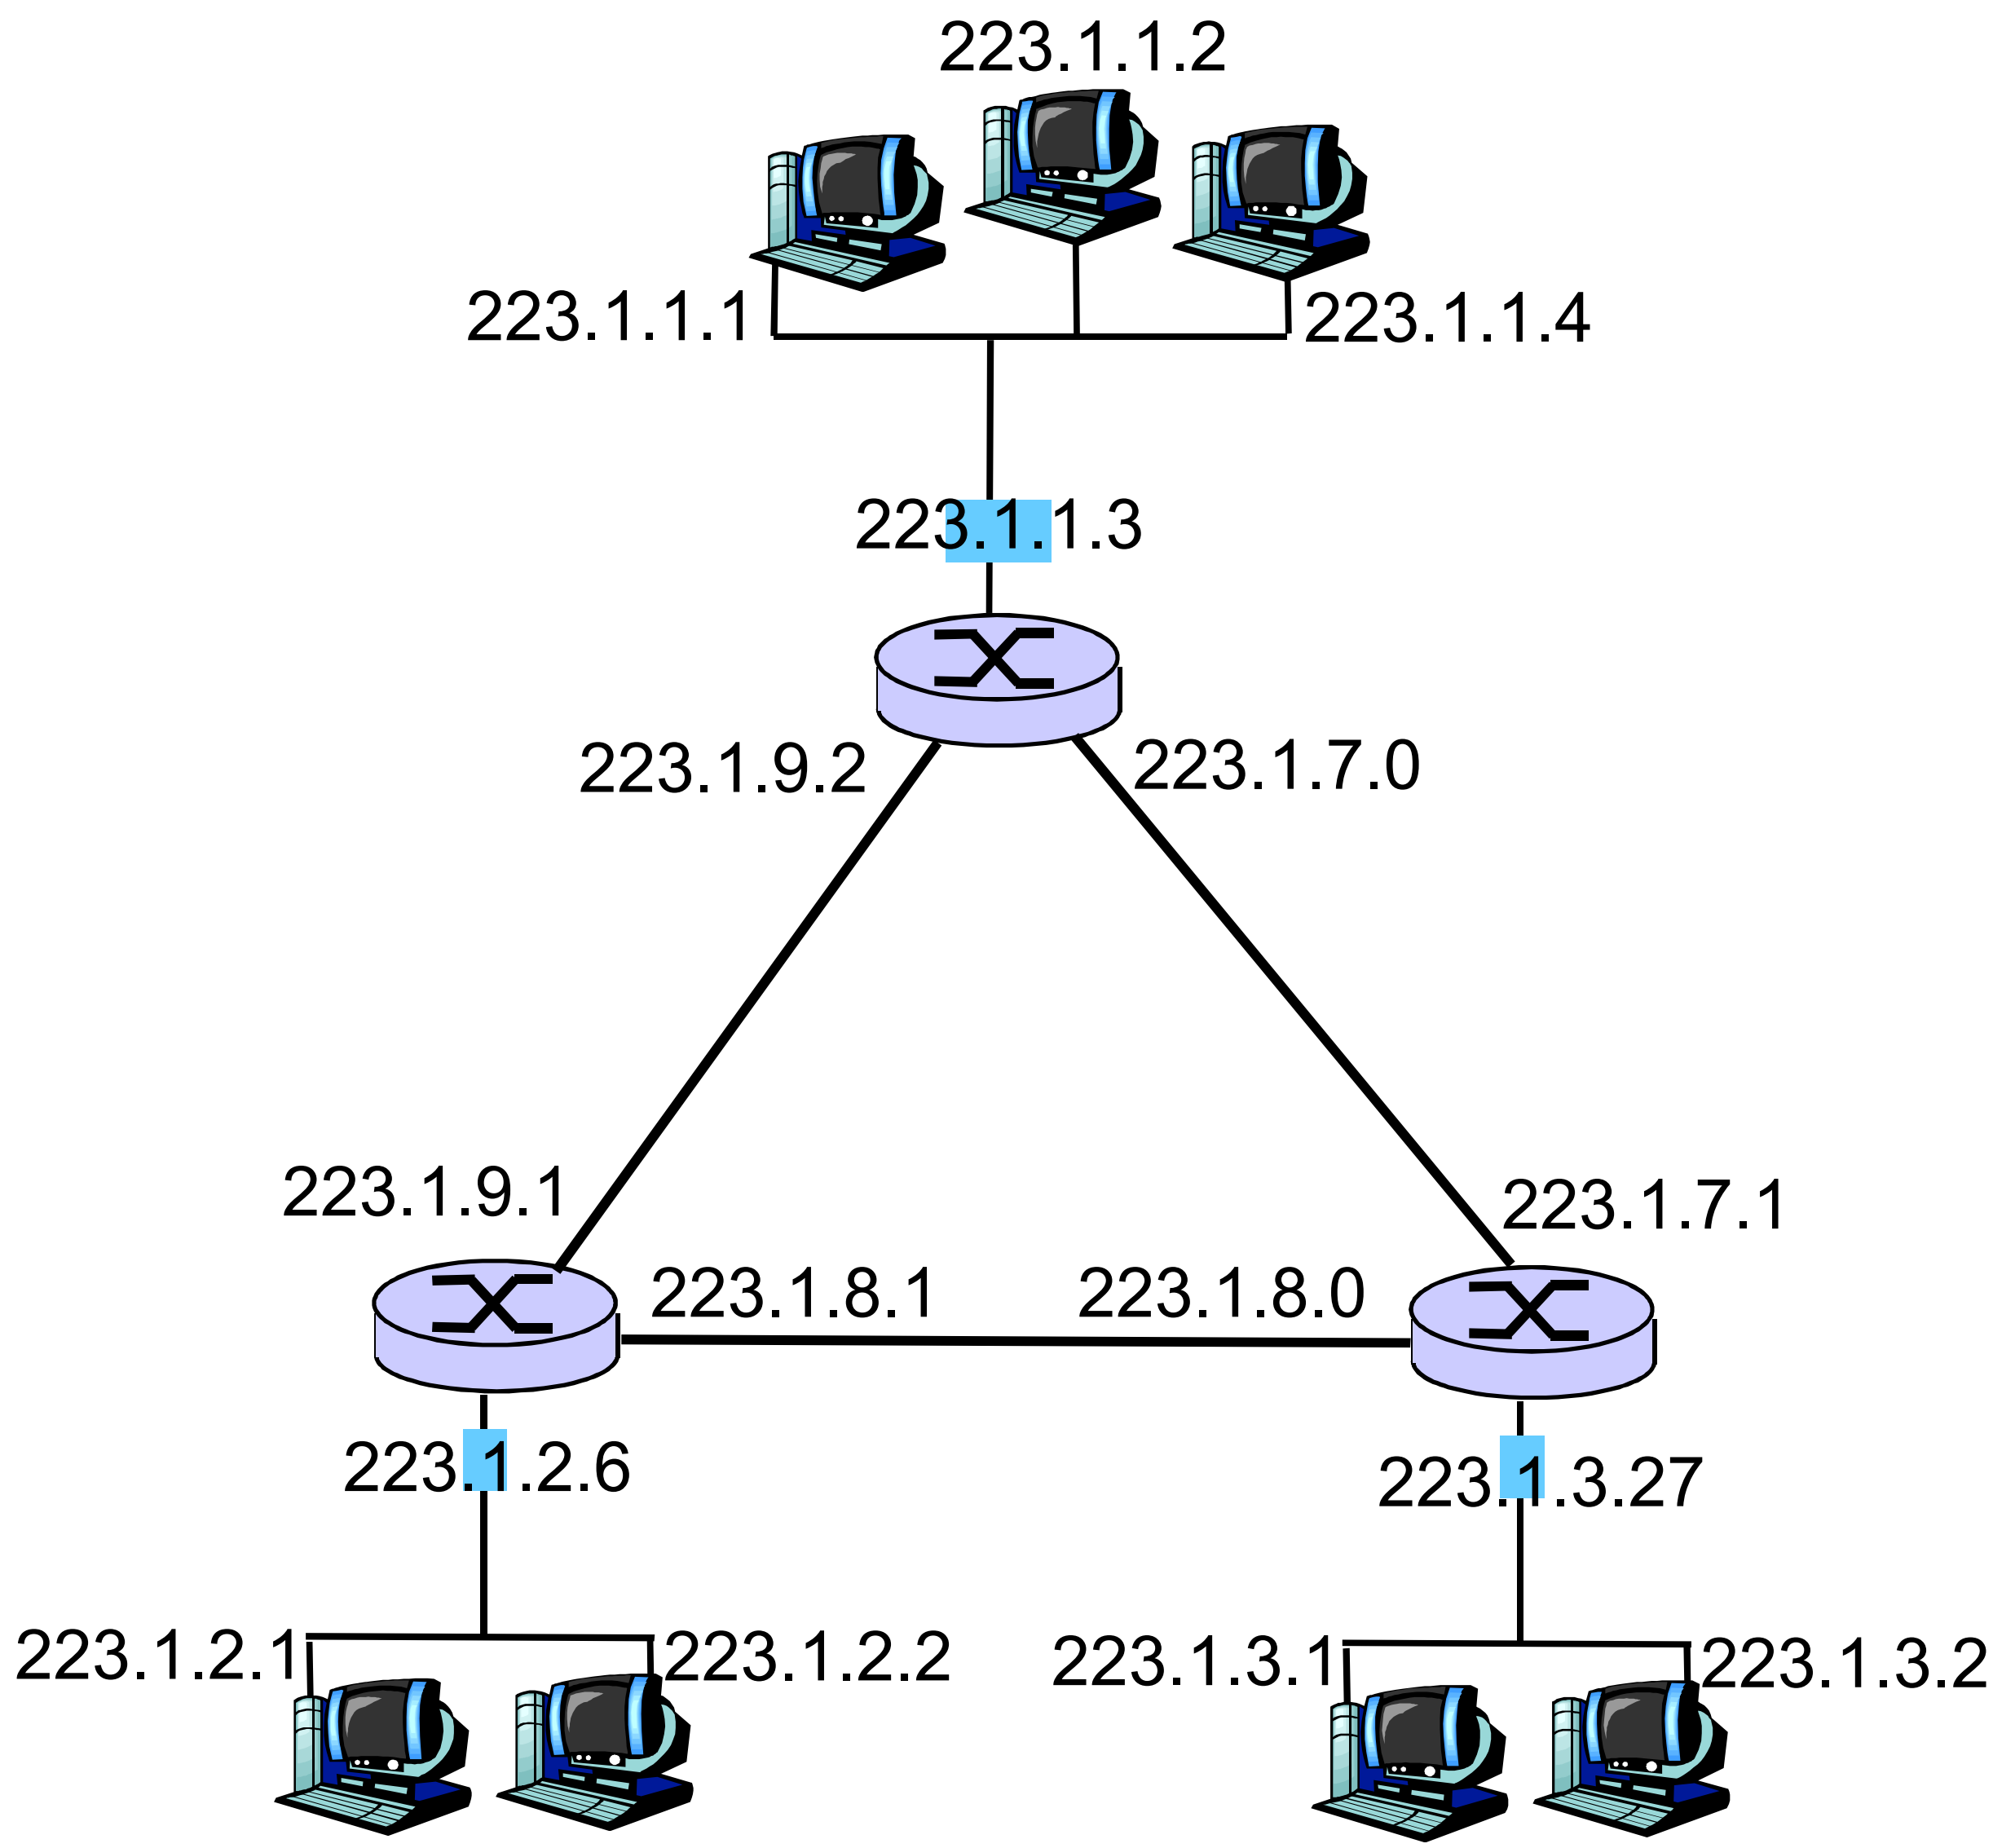

Subnets

How many? 6

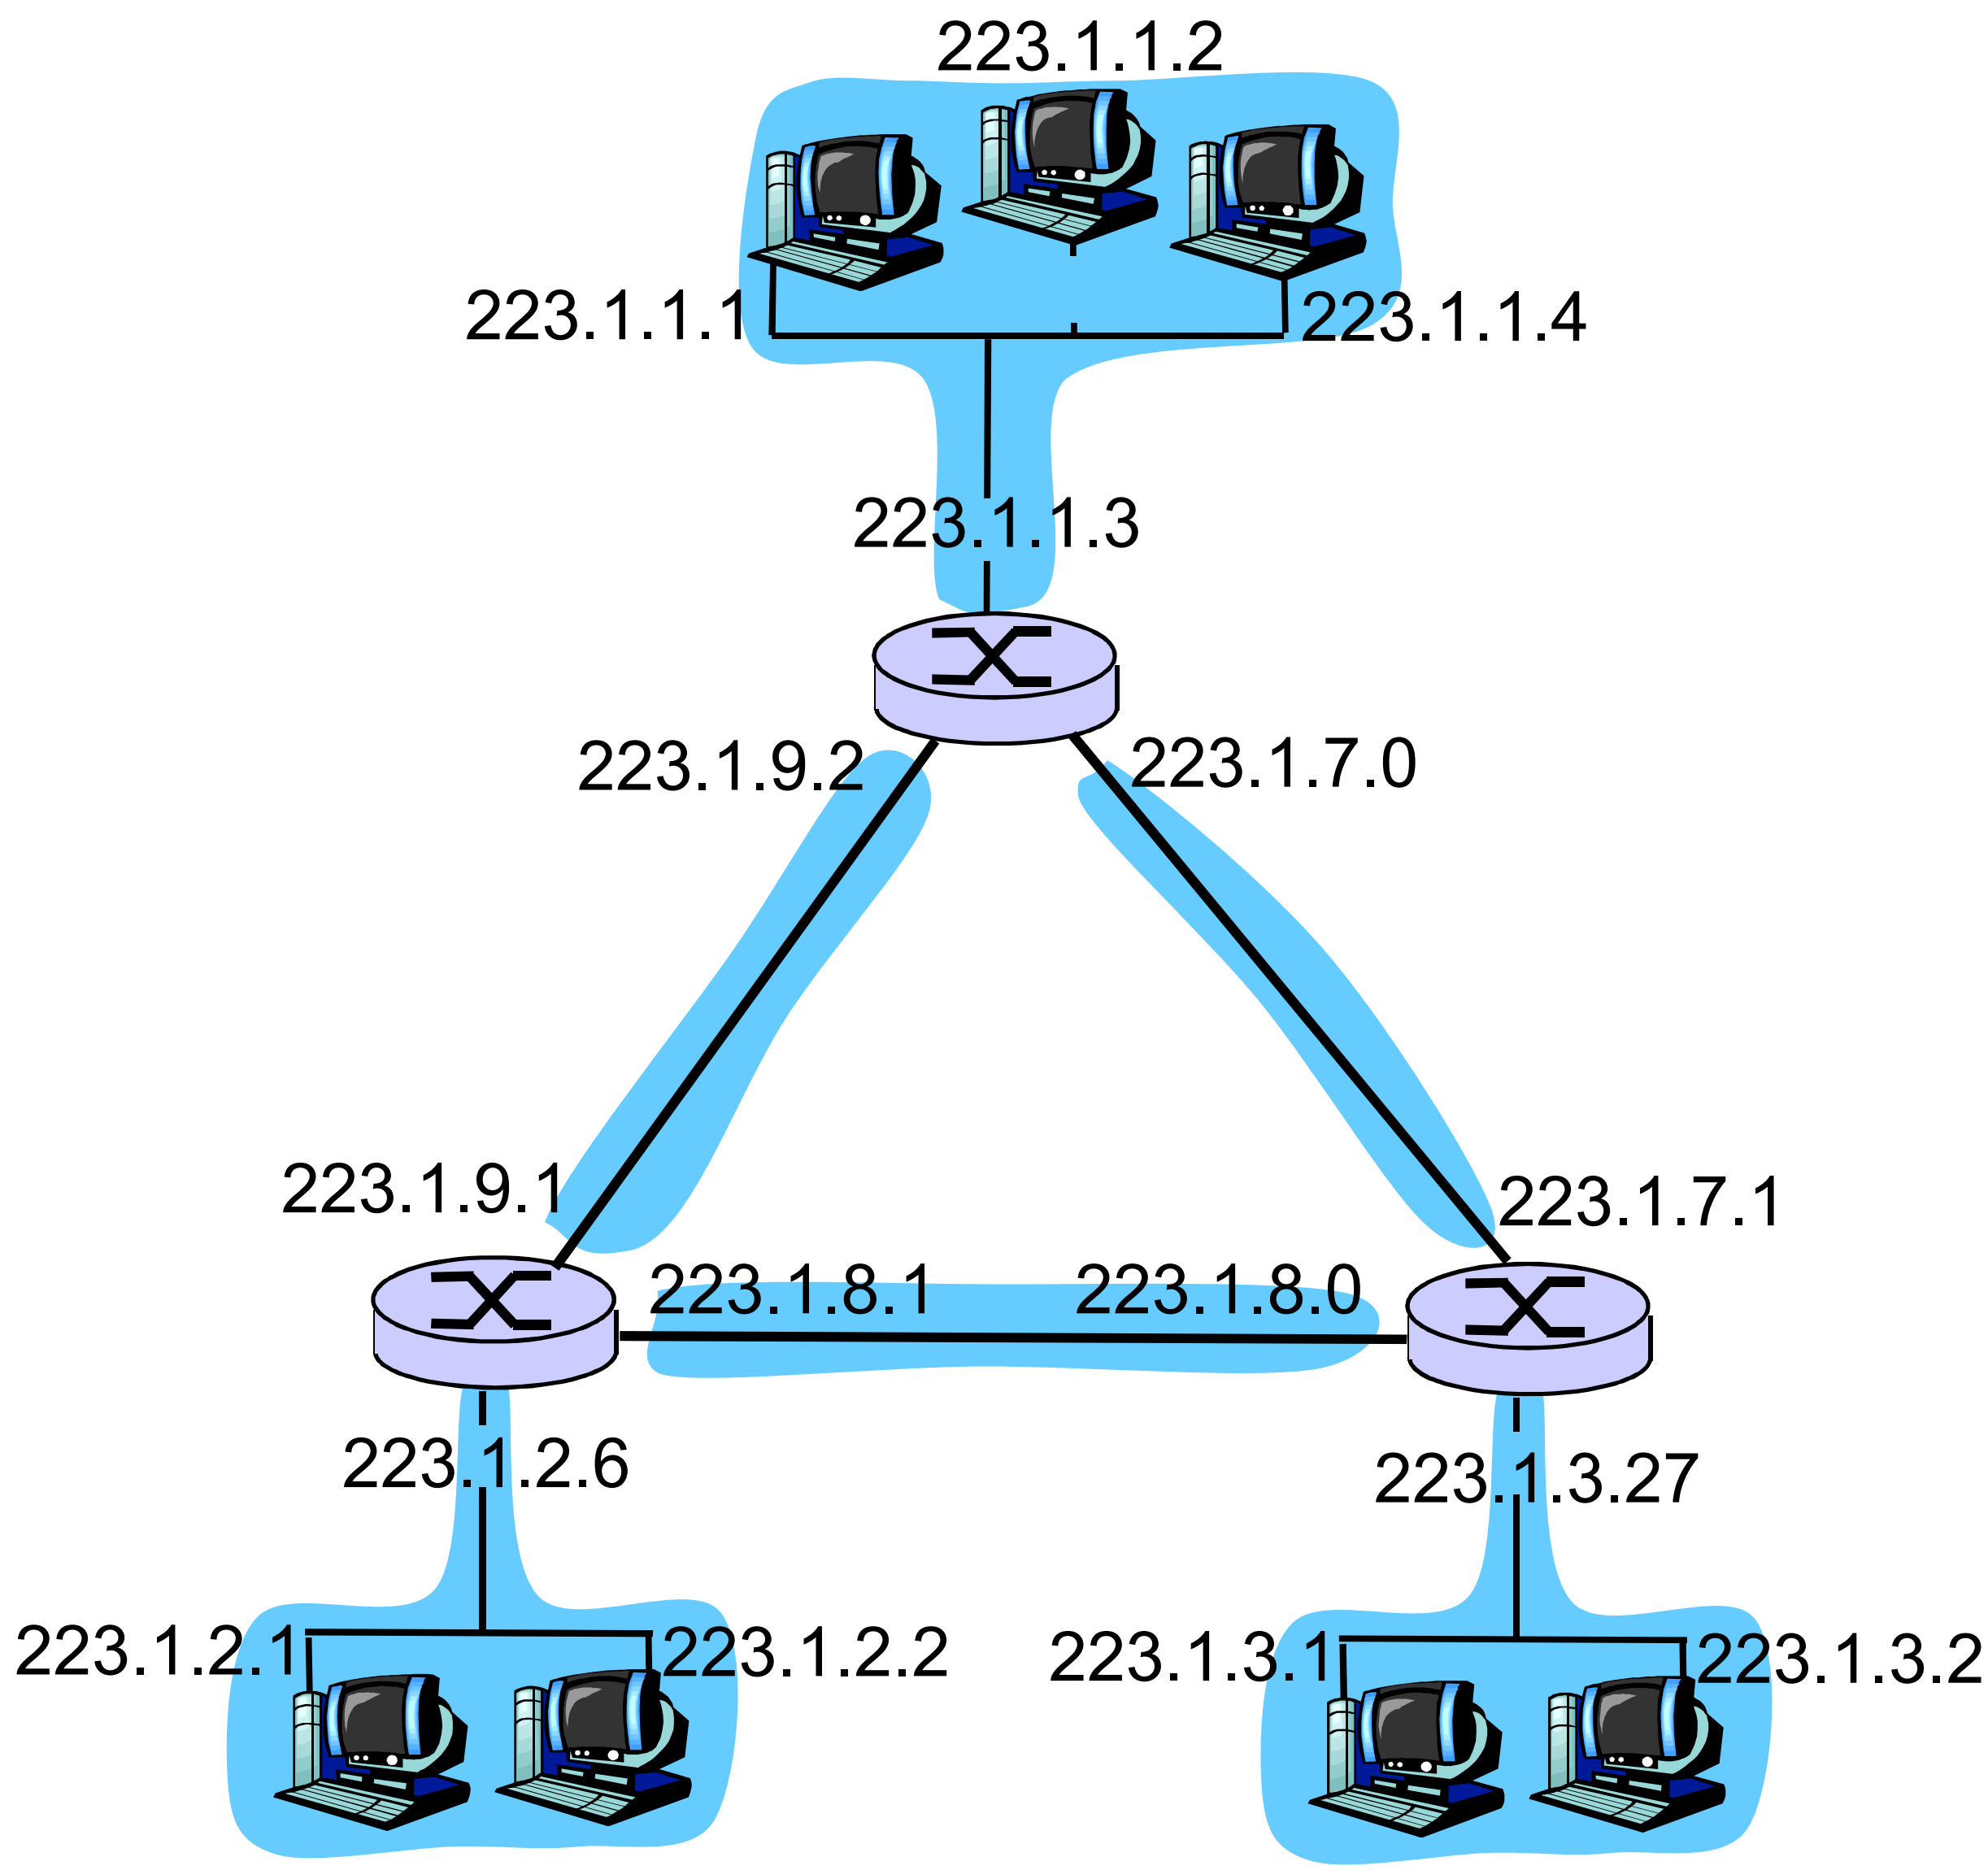

IP addressing: CIDR

CIDR: Classless InterDomain Routing

- subnet portion of address of arbitrary length
- address format: a.b.c.d/x, where x is # bits in subnet portion of address

subnet part | host part

11001000 00010111 00010000 00000000

200.23.16.0/23

IP addresses: how to get one?

Q: How does a *host* get IP address?

- hard-coded by system admin in a file
  - Windows: control-panel->network->configuration->tcp/ip->properties
  - UNIX: /etc/rc.config
- DHCP: Dynamic Host Configuration Protocol: dynamically get address from a server
  - "plug-and-play"

DHCP: Dynamic Host Configuration Protocol

Goal: allow host to *dynamically* obtain its IP address from network server when it joins network

- Can renew its lease on address in use
- Allows reuse of addresses (only hold address while connected and "on")
- Support for mobile users who want to join network (more shortly)

DHCP overview:

- host broadcasts "DHCP discover" msg [optional]
- DHCP server responds with "DHCP offer" msg [optional]
- host requests IP address: "DHCP request" msg
- DHCP server sends address: "DHCP ack" msg

DHCP client-server scenario

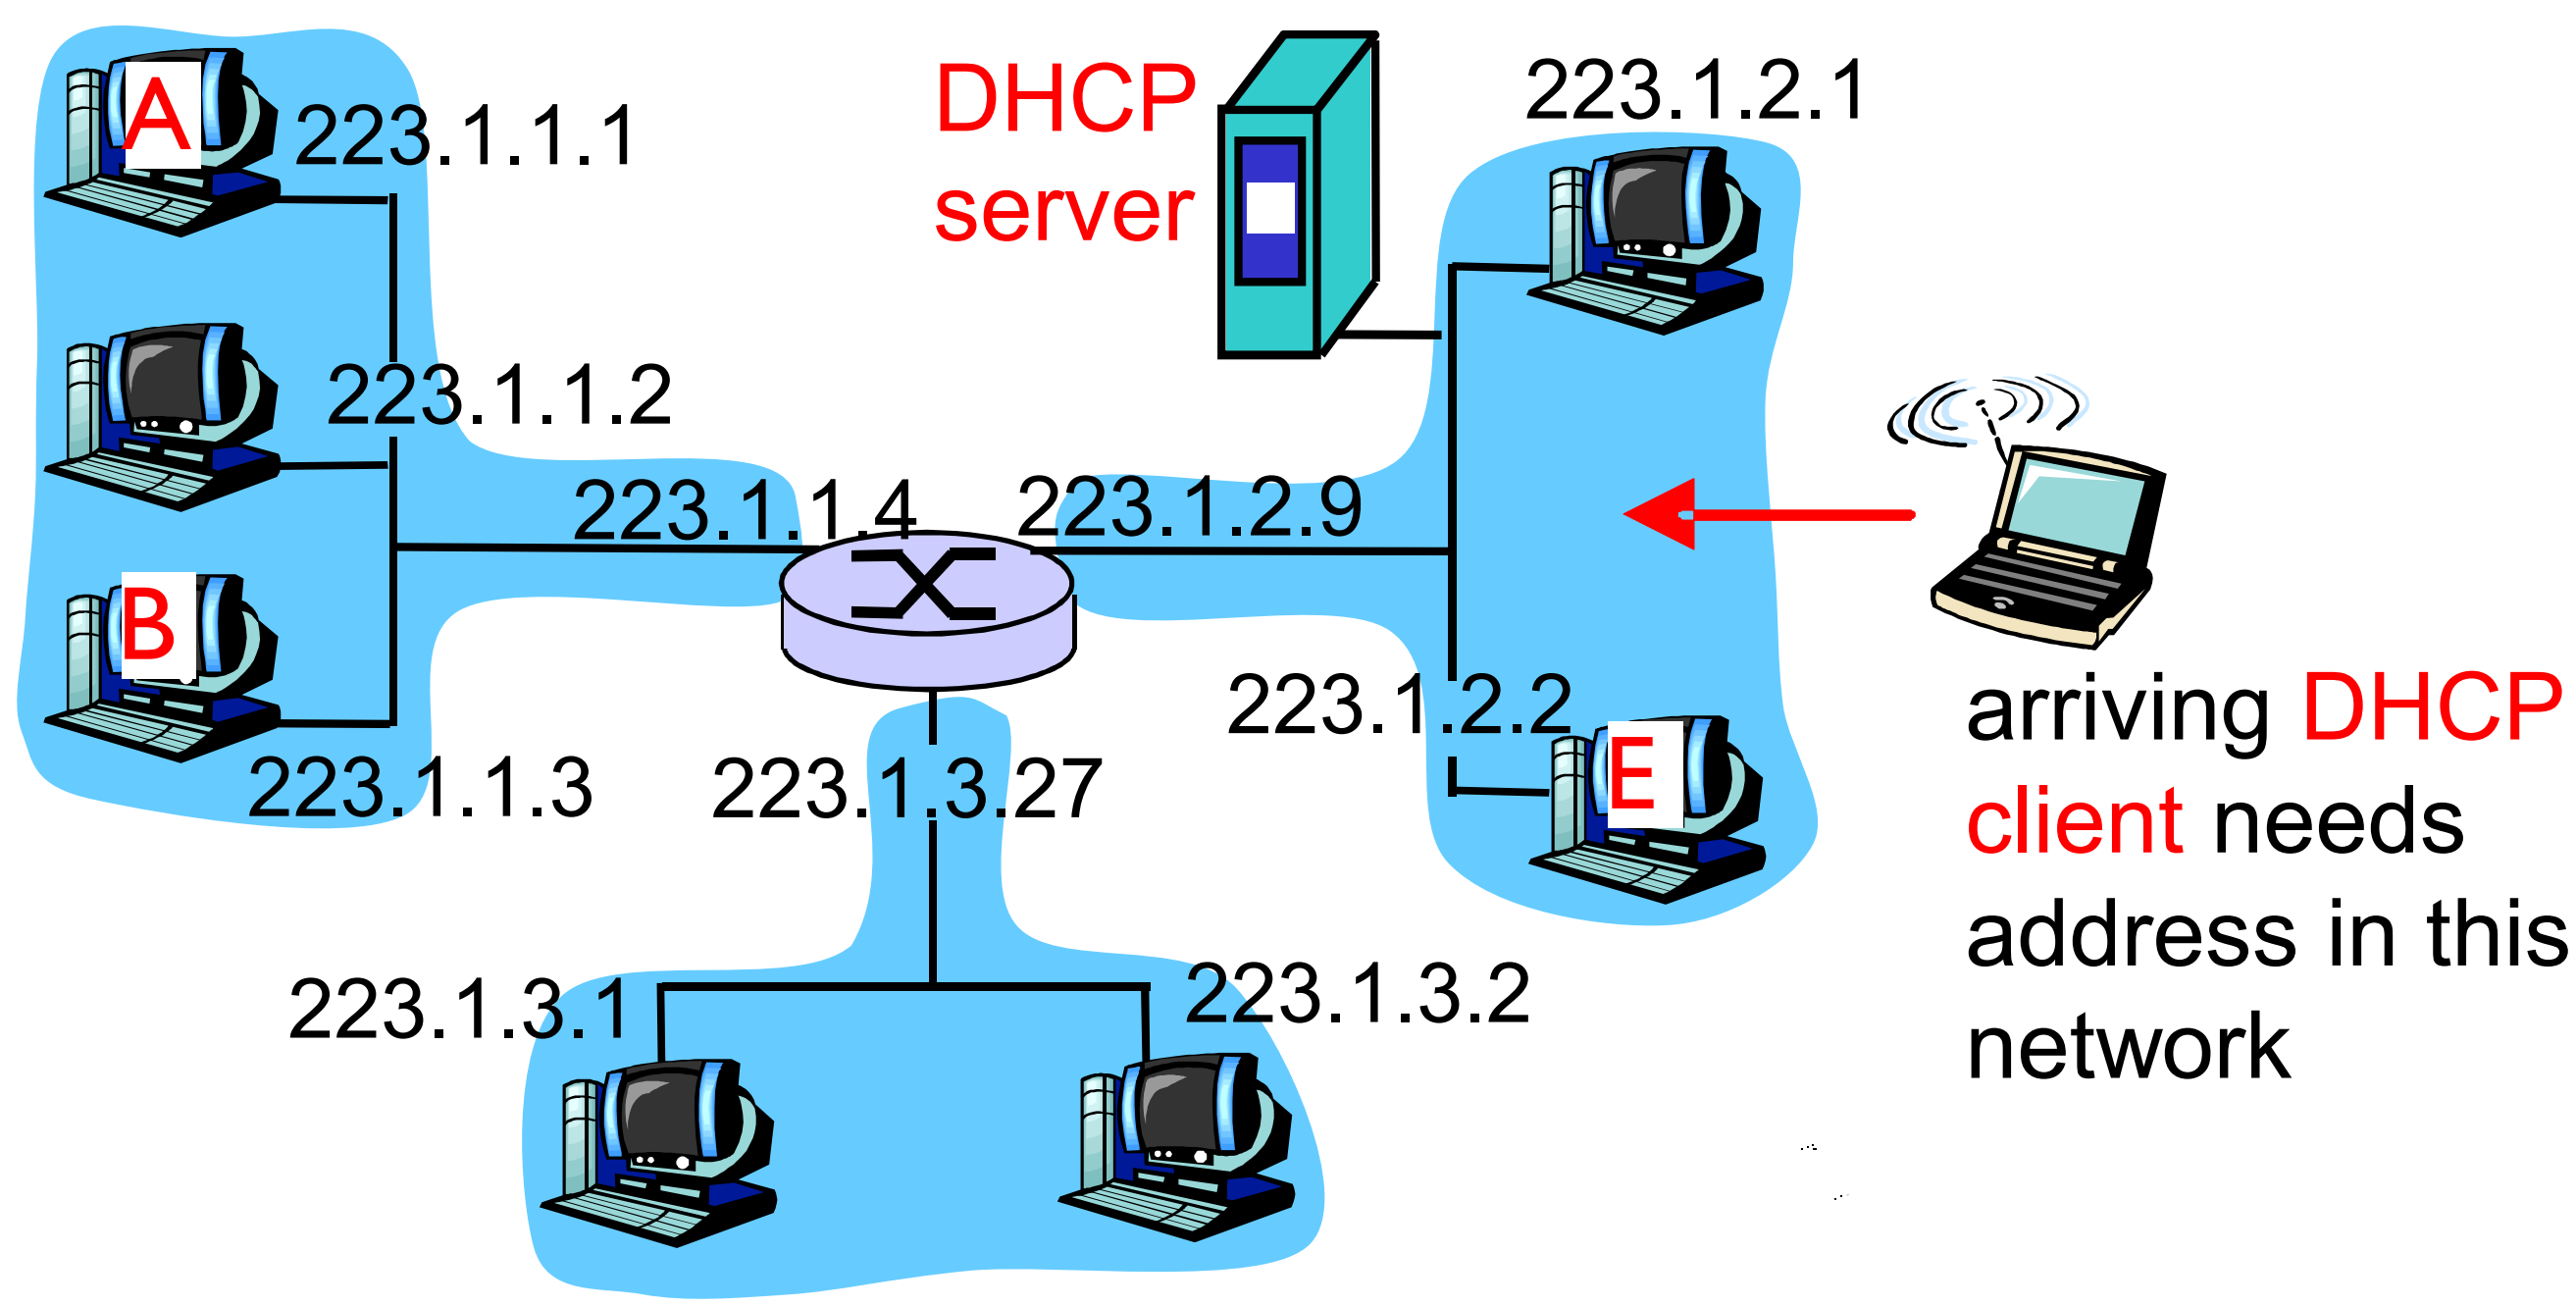

DHCP client-server scenario

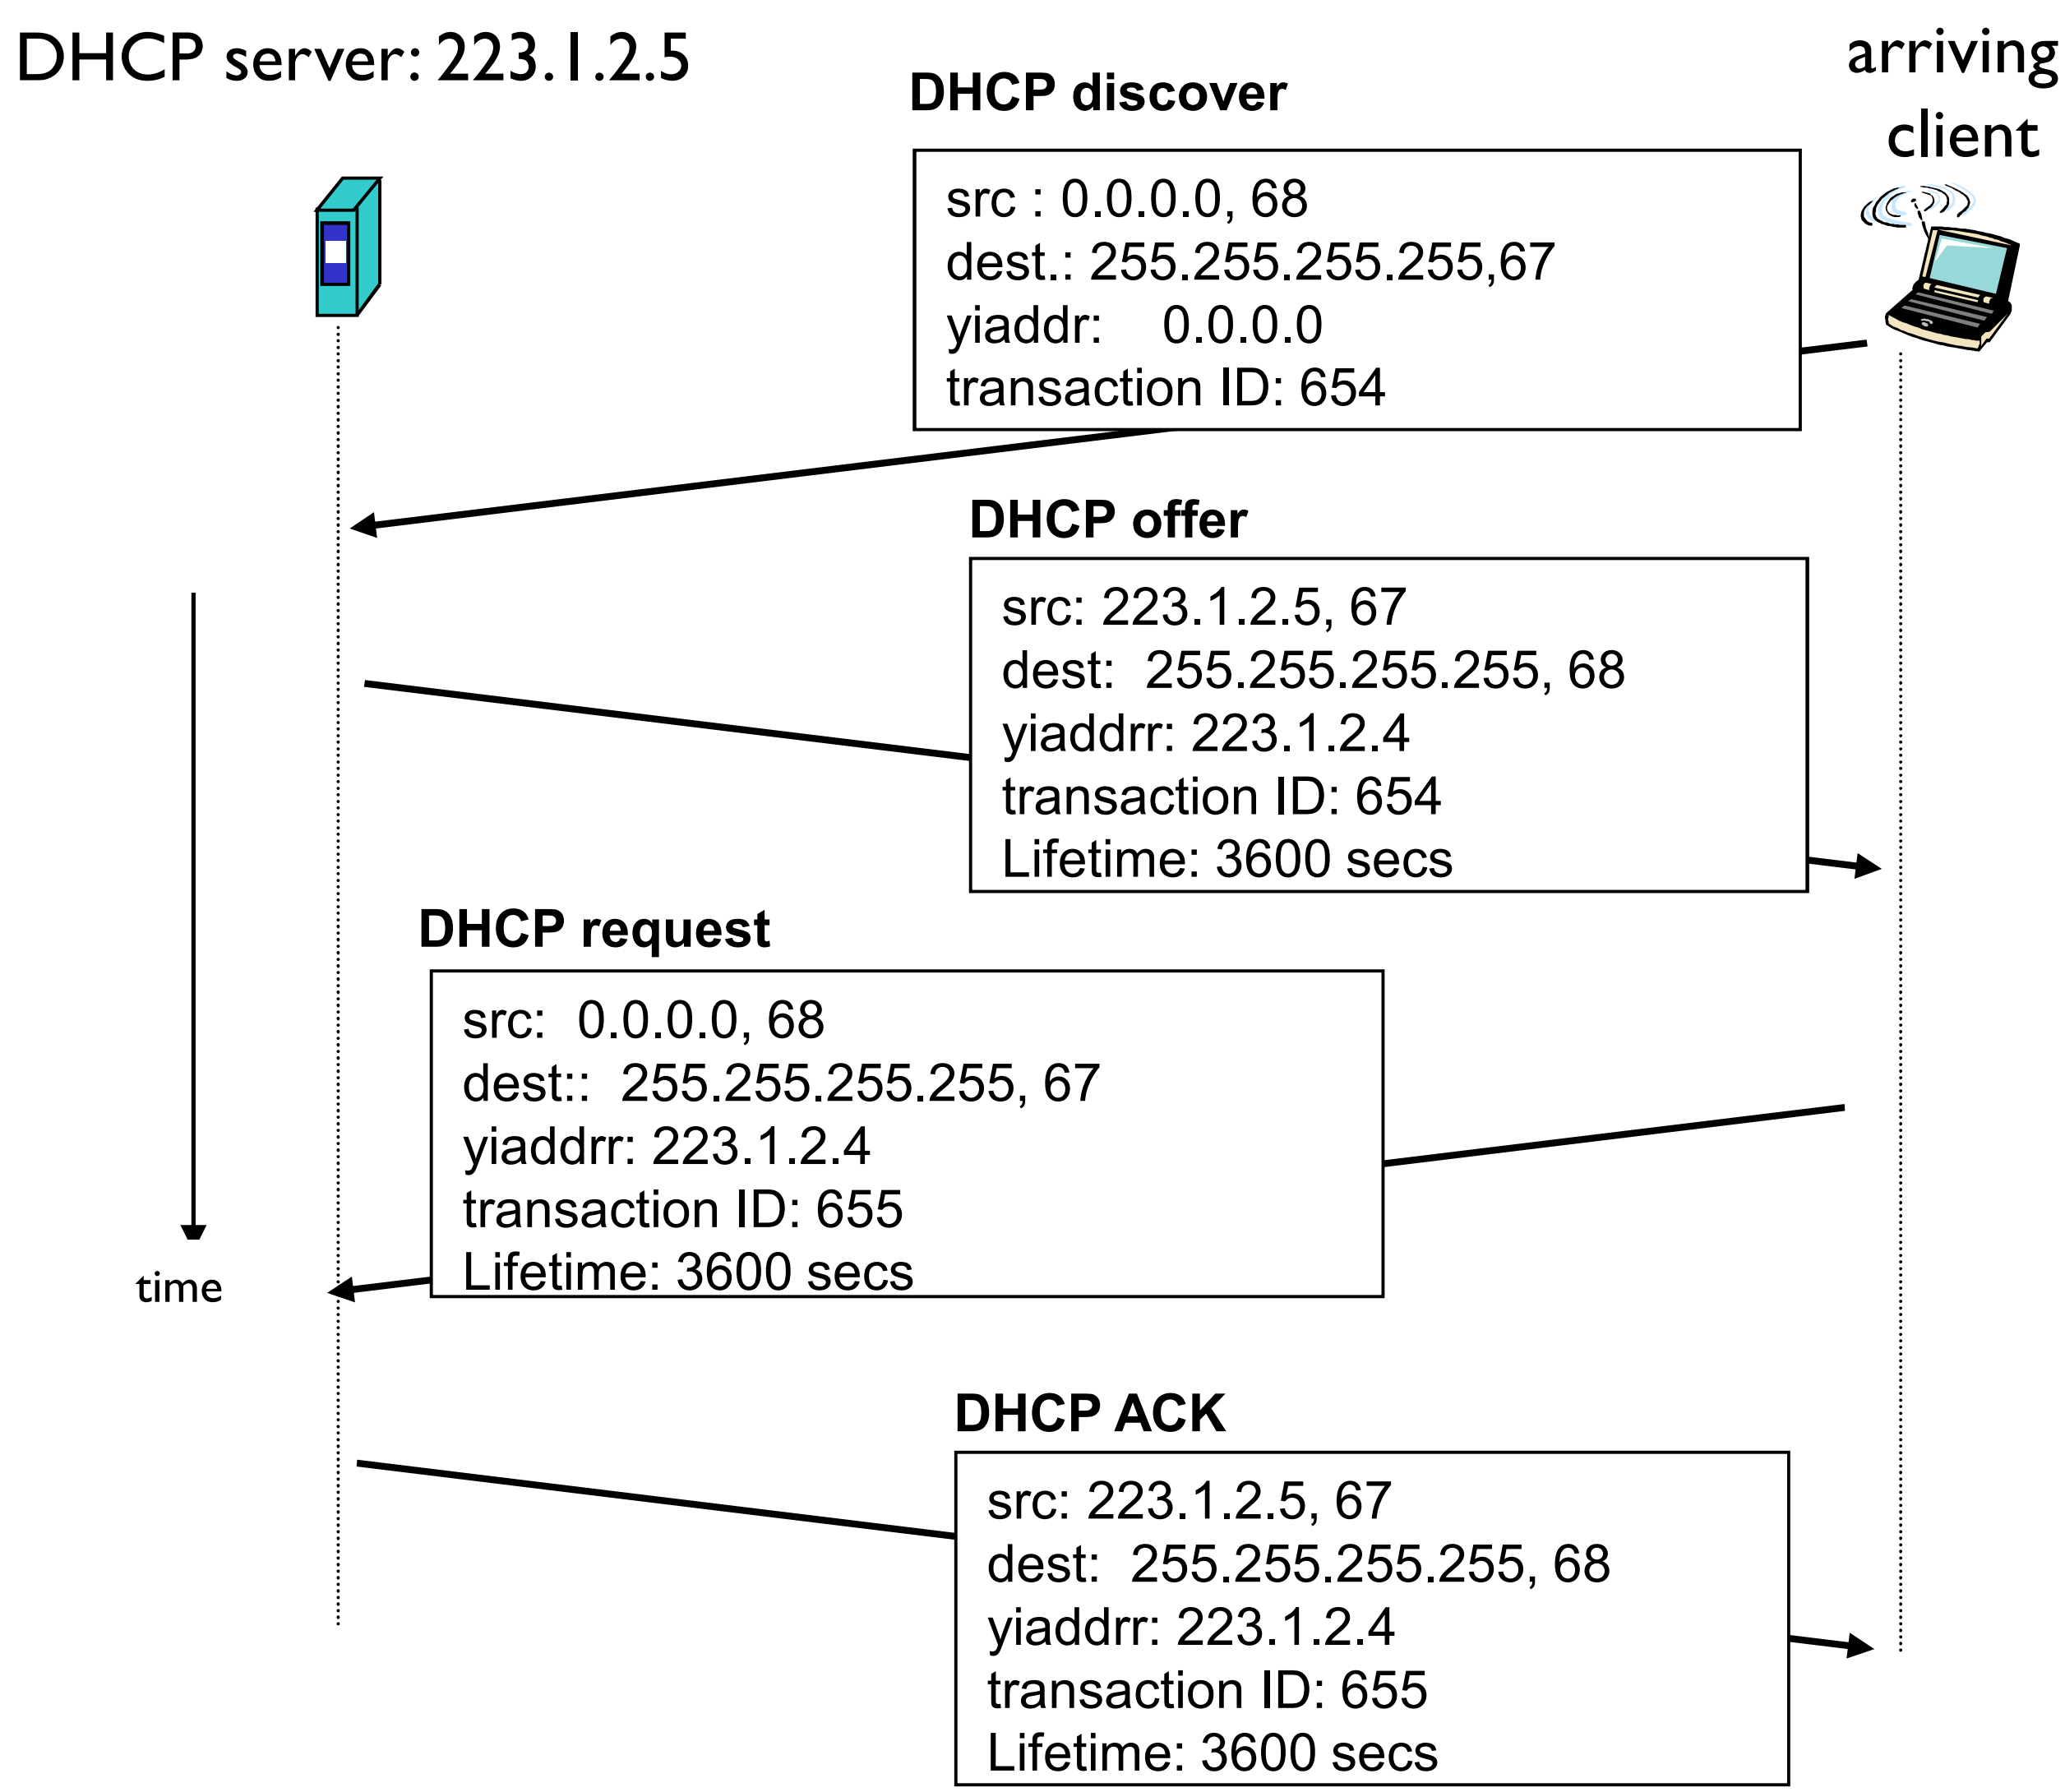

DHCP: more than IP address

DHCP can return more than just allocated IP address on subnet:

- address of first-hop router for client
- name and IP address of DNS sever
- network mask (indicating network versus host portion of address)

DHCP: example

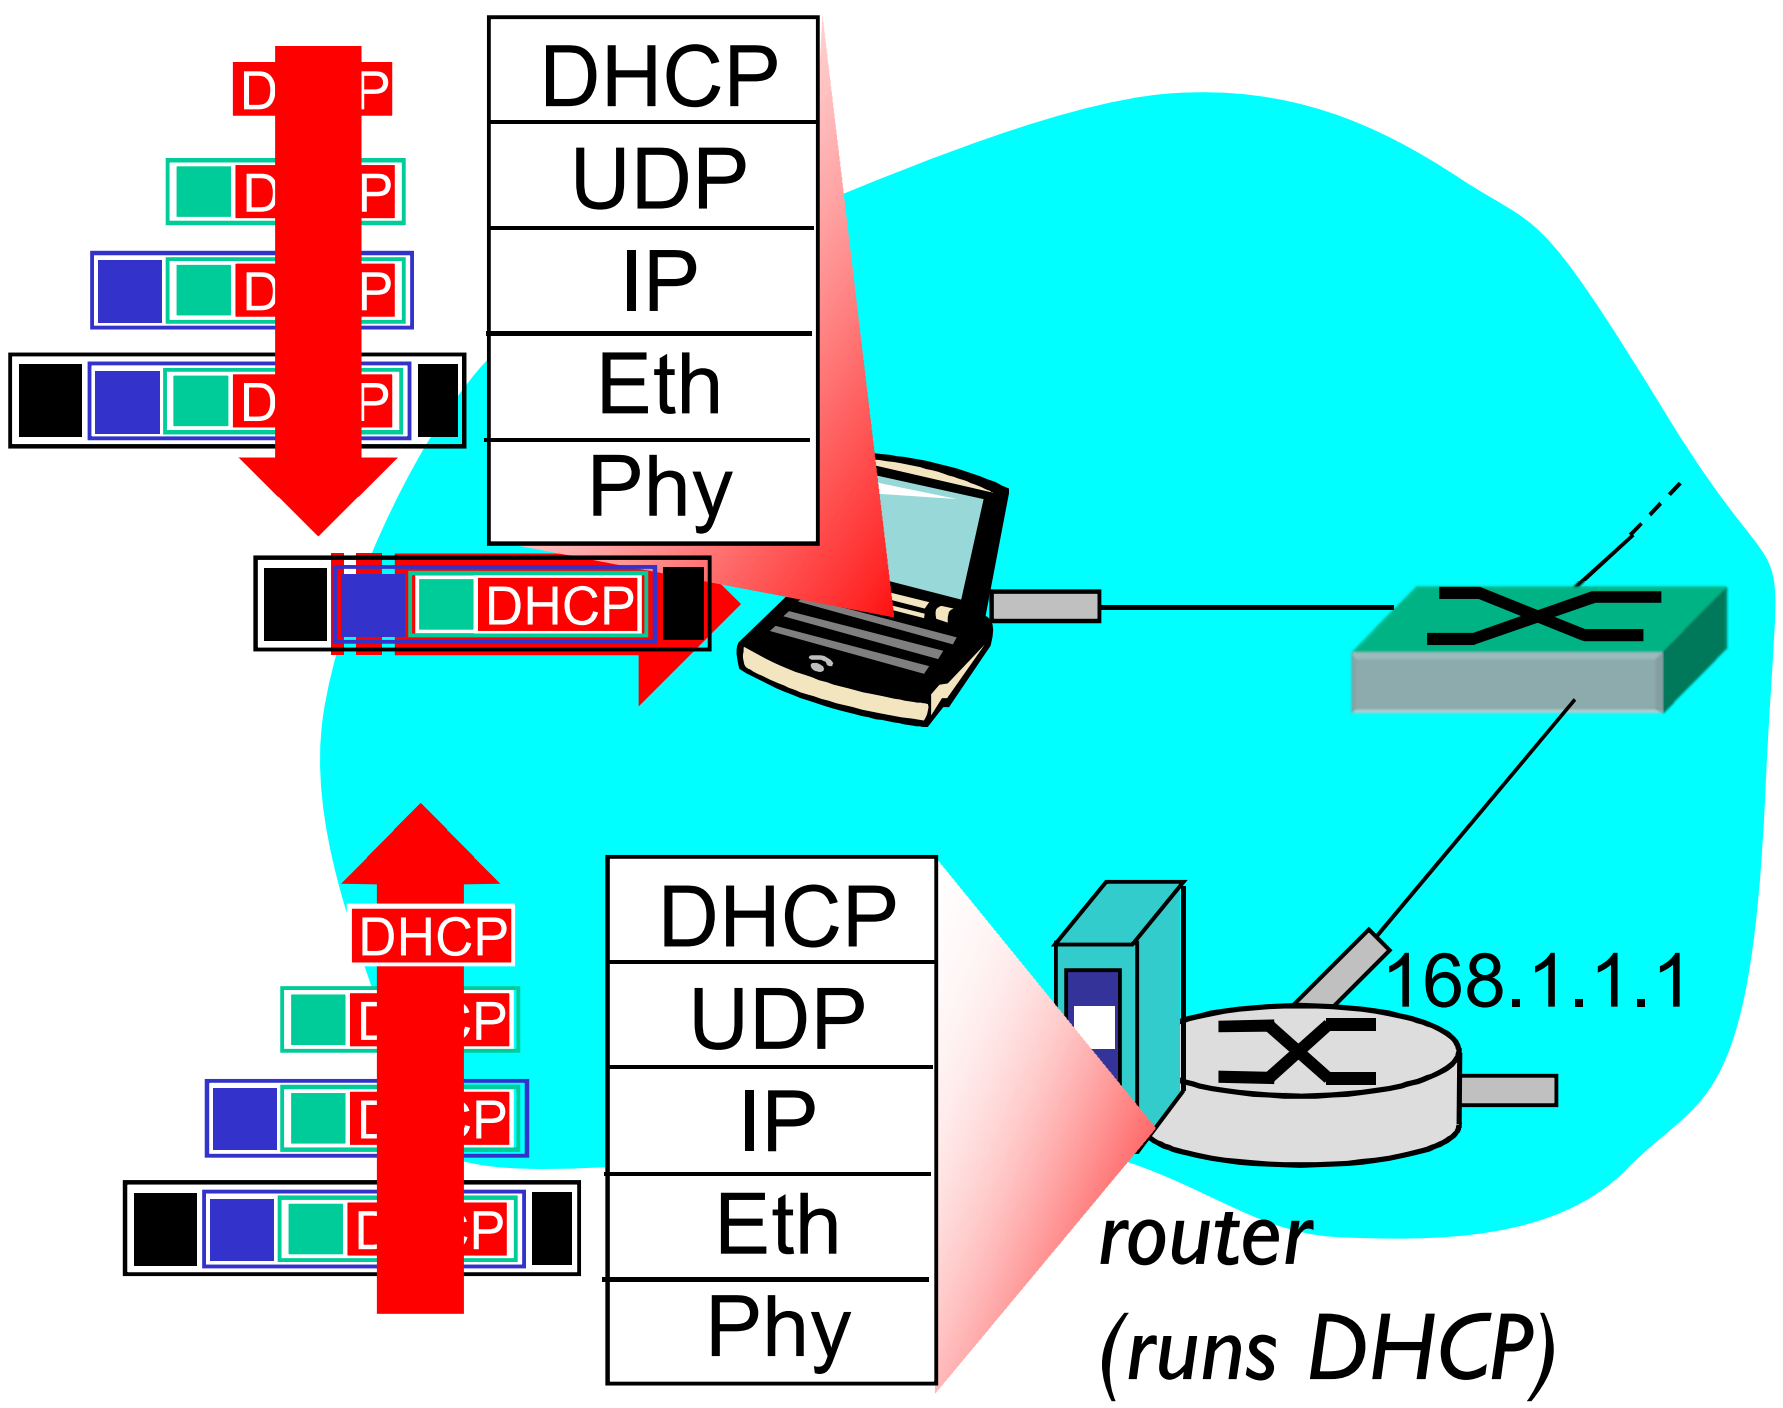

- connecting laptop needs its IP address, addr of first-hop router, addr of DNS server: use DHCP
- DHCP request encapsulated in UDP, encapsulated in IP, encapsulated in 802.1 Ethernet
- Ethernet frame broadcast (dest: FFFFFFFFFFFF) on LAN, received at router running DHCP server
- Ethernet demuxed to IP demuxed, UDP demuxed to DHCP

DHCP: example

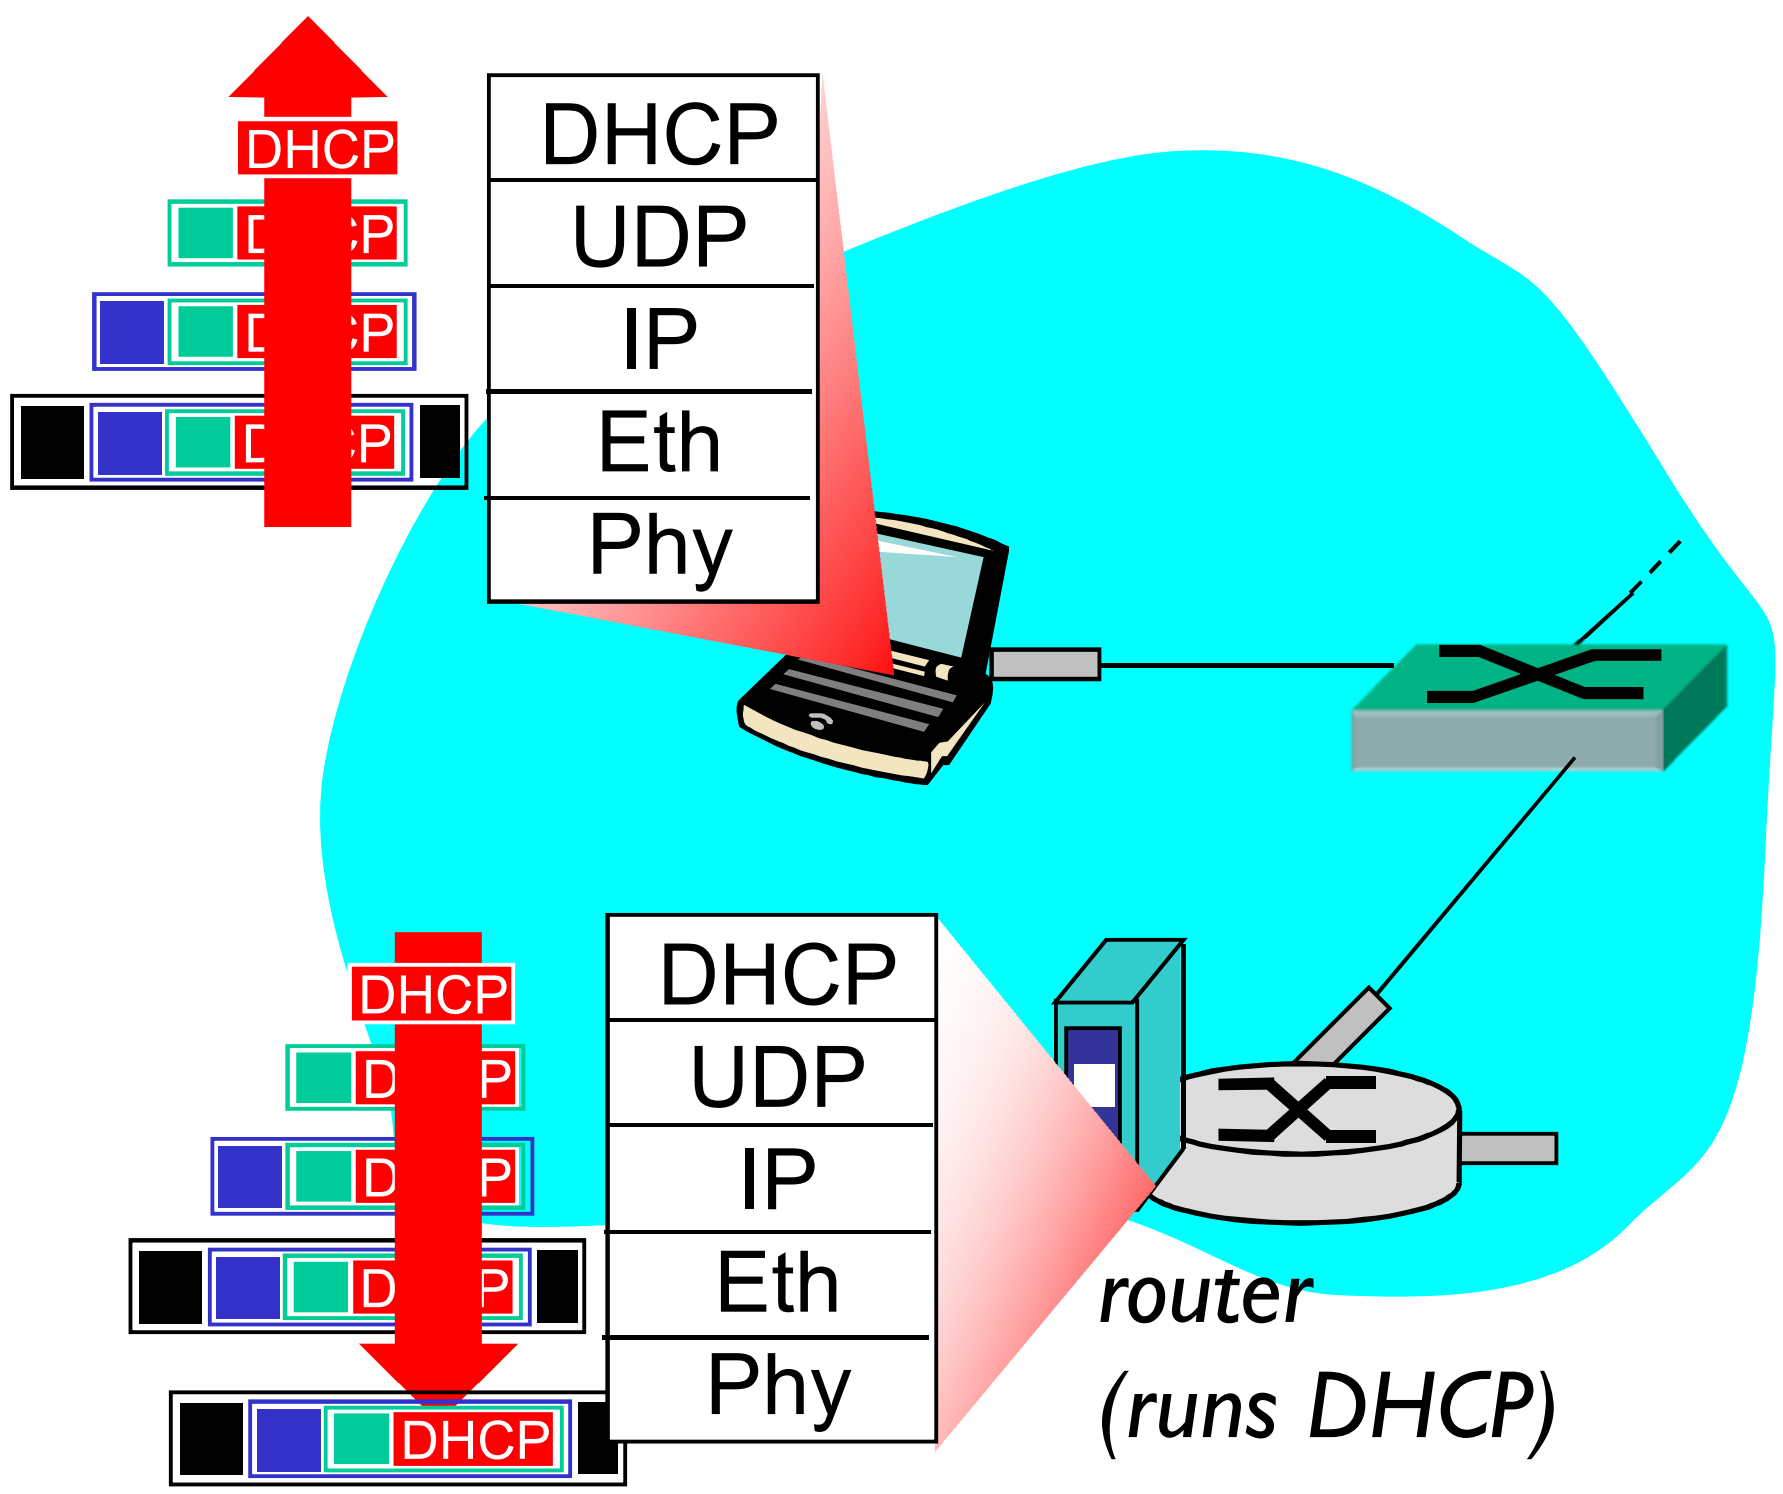

- DHCP server formulates DHCP ACK containing client's IP address, IP address of first-hop router for client, name & IP address of DNS server
- encapsulation of DHCP server, frame forwarded to client, demuxing up to DHCP at client
- client now knows its IP address, name and IP address of DSN server, IP address of its first-hop router

DHCP: Wireshark output (home LAN)

request

Message type: **Boot Request (1)**
Hardware type: Ethernet
Hardware address length: 6
Hops: 0
Transaction ID: 0x6b3a11b7
Seconds elapsed: 0
Bootp flags: 0x0000 (Unicast)
Client IP address: 0.0.0.0 (0.0.0.0)
Your (client) IP address: 0.0.0.0 (0.0.0.0)
Next server IP address: 0.0.0.0 (0.0.0.0)
Relay agent IP address: 0.0.0.0 (0.0.0.0)
Client MAC address: Wistron_23:68:8a (00:16:d3:23:68:8a)
Server host name not given
Boot file name not given
Magic cookie: (OK)
Option: (t=53,l=1) **DHCP Message Type = DHCP Request**
Option: (61) Client identifier
    Length: 7; Value: 010016D323688A;
    Hardware type: Ethernet
    Client MAC address: Wistron_23:68:8a (00:16:d3:23:68:8a)
Option: (t=50,l=4) Requested IP Address = 192.168.1.101
Option: (t=12,l=5) Host Name = "nomad"
Option: (55) Parameter Request List
    Length: 11; Value: 010F03062C2E2F1F21F92B
    1 = Subnet Mask; 15 = Domain Name
    3 = Router; 6 = Domain Name Server
    44 = NetBIOS over TCP/IP Name Server
    ……

reply

Message type: **Boot Reply (2)**
Hardware type: Ethernet
Hardware address length: 6
Hops: 0
Transaction ID: 0x6b3a11b7
Seconds elapsed: 0
Bootp flags: 0x0000 (Unicast)
Client IP address: 192.168.1.101 (192.168.1.101)
Your (client) IP address: 0.0.0.0 (0.0.0.0)
Next server IP address: 192.168.1.1 (192.168.1.1)
Relay agent IP address: 0.0.0.0 (0.0.0.0)
Client MAC address: Wistron_23:68:8a (00:16:d3:23:68:8a)
Server host name not given
Boot file name not given
Magic cookie: (OK)
Option: (t=53,l=1) DHCP Message Type = DHCP ACK
Option: (t=54,l=4) Server Identifier = 192.168.1.1
Option: (t=1,l=4) Subnet Mask = 255.255.255.0
Option: (t=3,l=4) Router = 192.168.1.1
Option: (6) Domain Name Server
    Length: 12; Value: 445747E2445749F244574092;
    IP Address: 68.87.71.226;
    IP Address: 68.87.73.242;
    IP Address: 68.87.64.146
Option: (t=15,l=20) Domain Name = "hsd1.ma.comcast.net."

IP addresses: how to get one?

Q: How does *network* get subnet part of IP addr?

A: gets allocated portion of its provider ISP's address space

ISP's block	11001000	00010111	00010000	00000000	200.23.16.0/20
Organization 0	11001000	00010111	00010000	00000000	200.23.16.0/23
Organization 1	11001000	00010111	00010010	00000000	200.23.18.0/23
Organization 2	11001000	00010111	00010100	00000000	200.23.20.0/23
...		.....		....	....
Organization 7	11001000	00010111	00011110	00000000	200.23.30.0/23

Hierarchical addressing: route aggregation

Hierarchical addressing allows efficient advertisement of routing information:

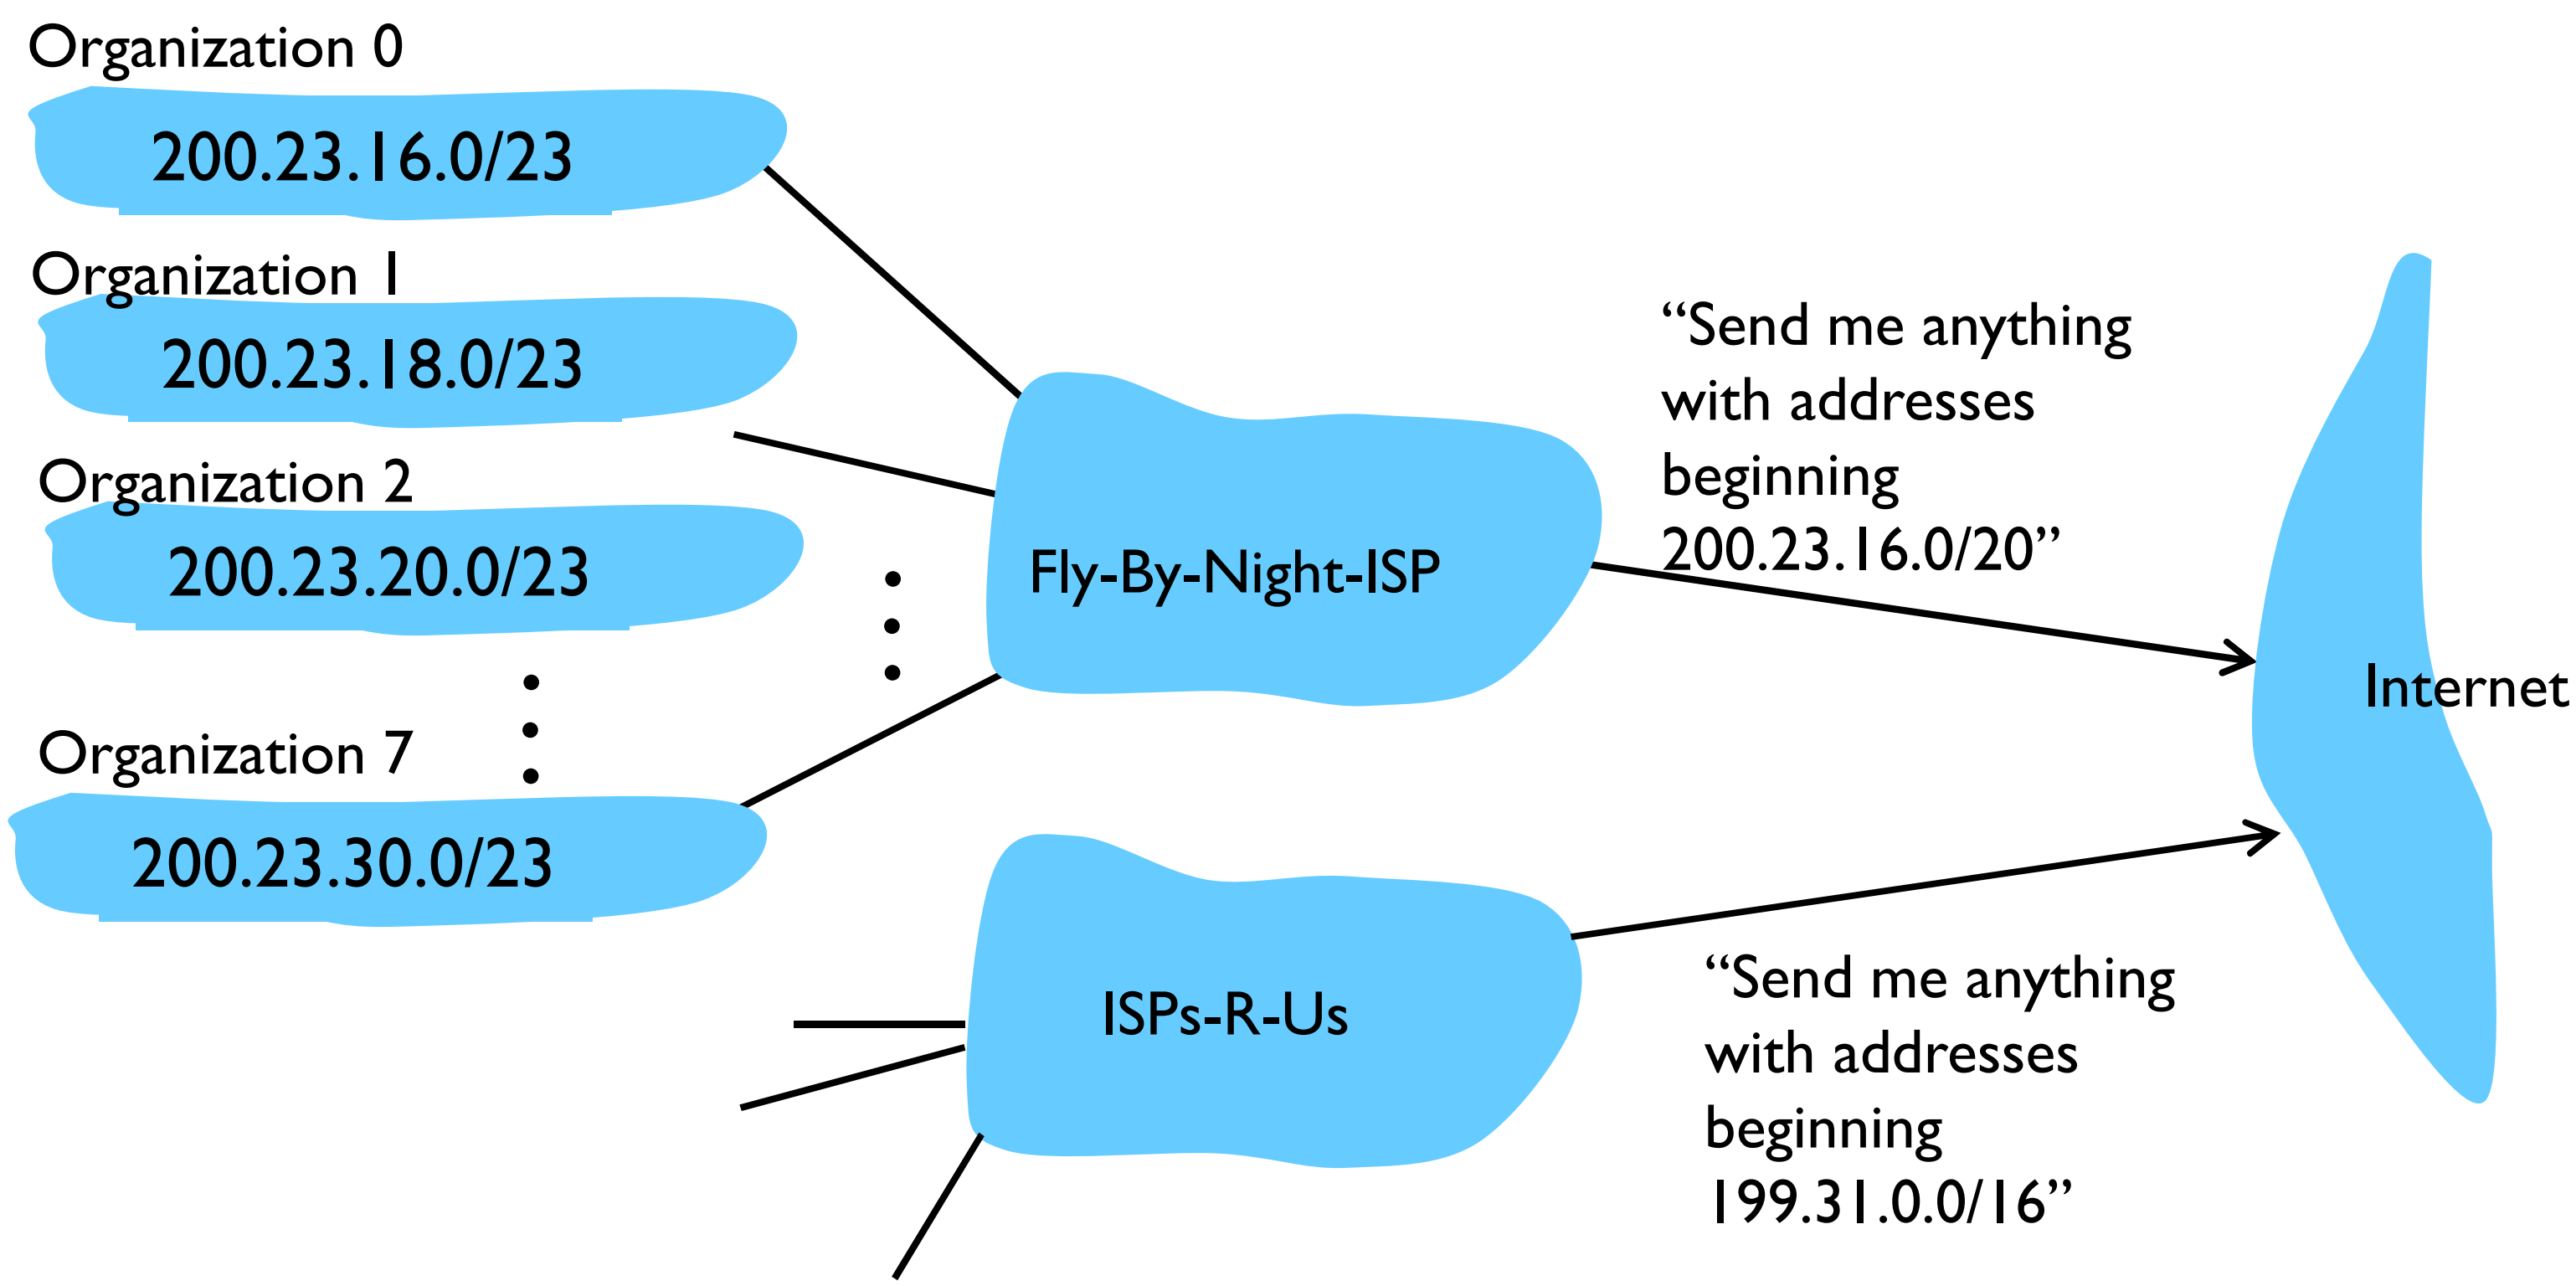

Hierarchical addressing: more specific routes

ISPs-R-Us has a more specific route to Organization 1

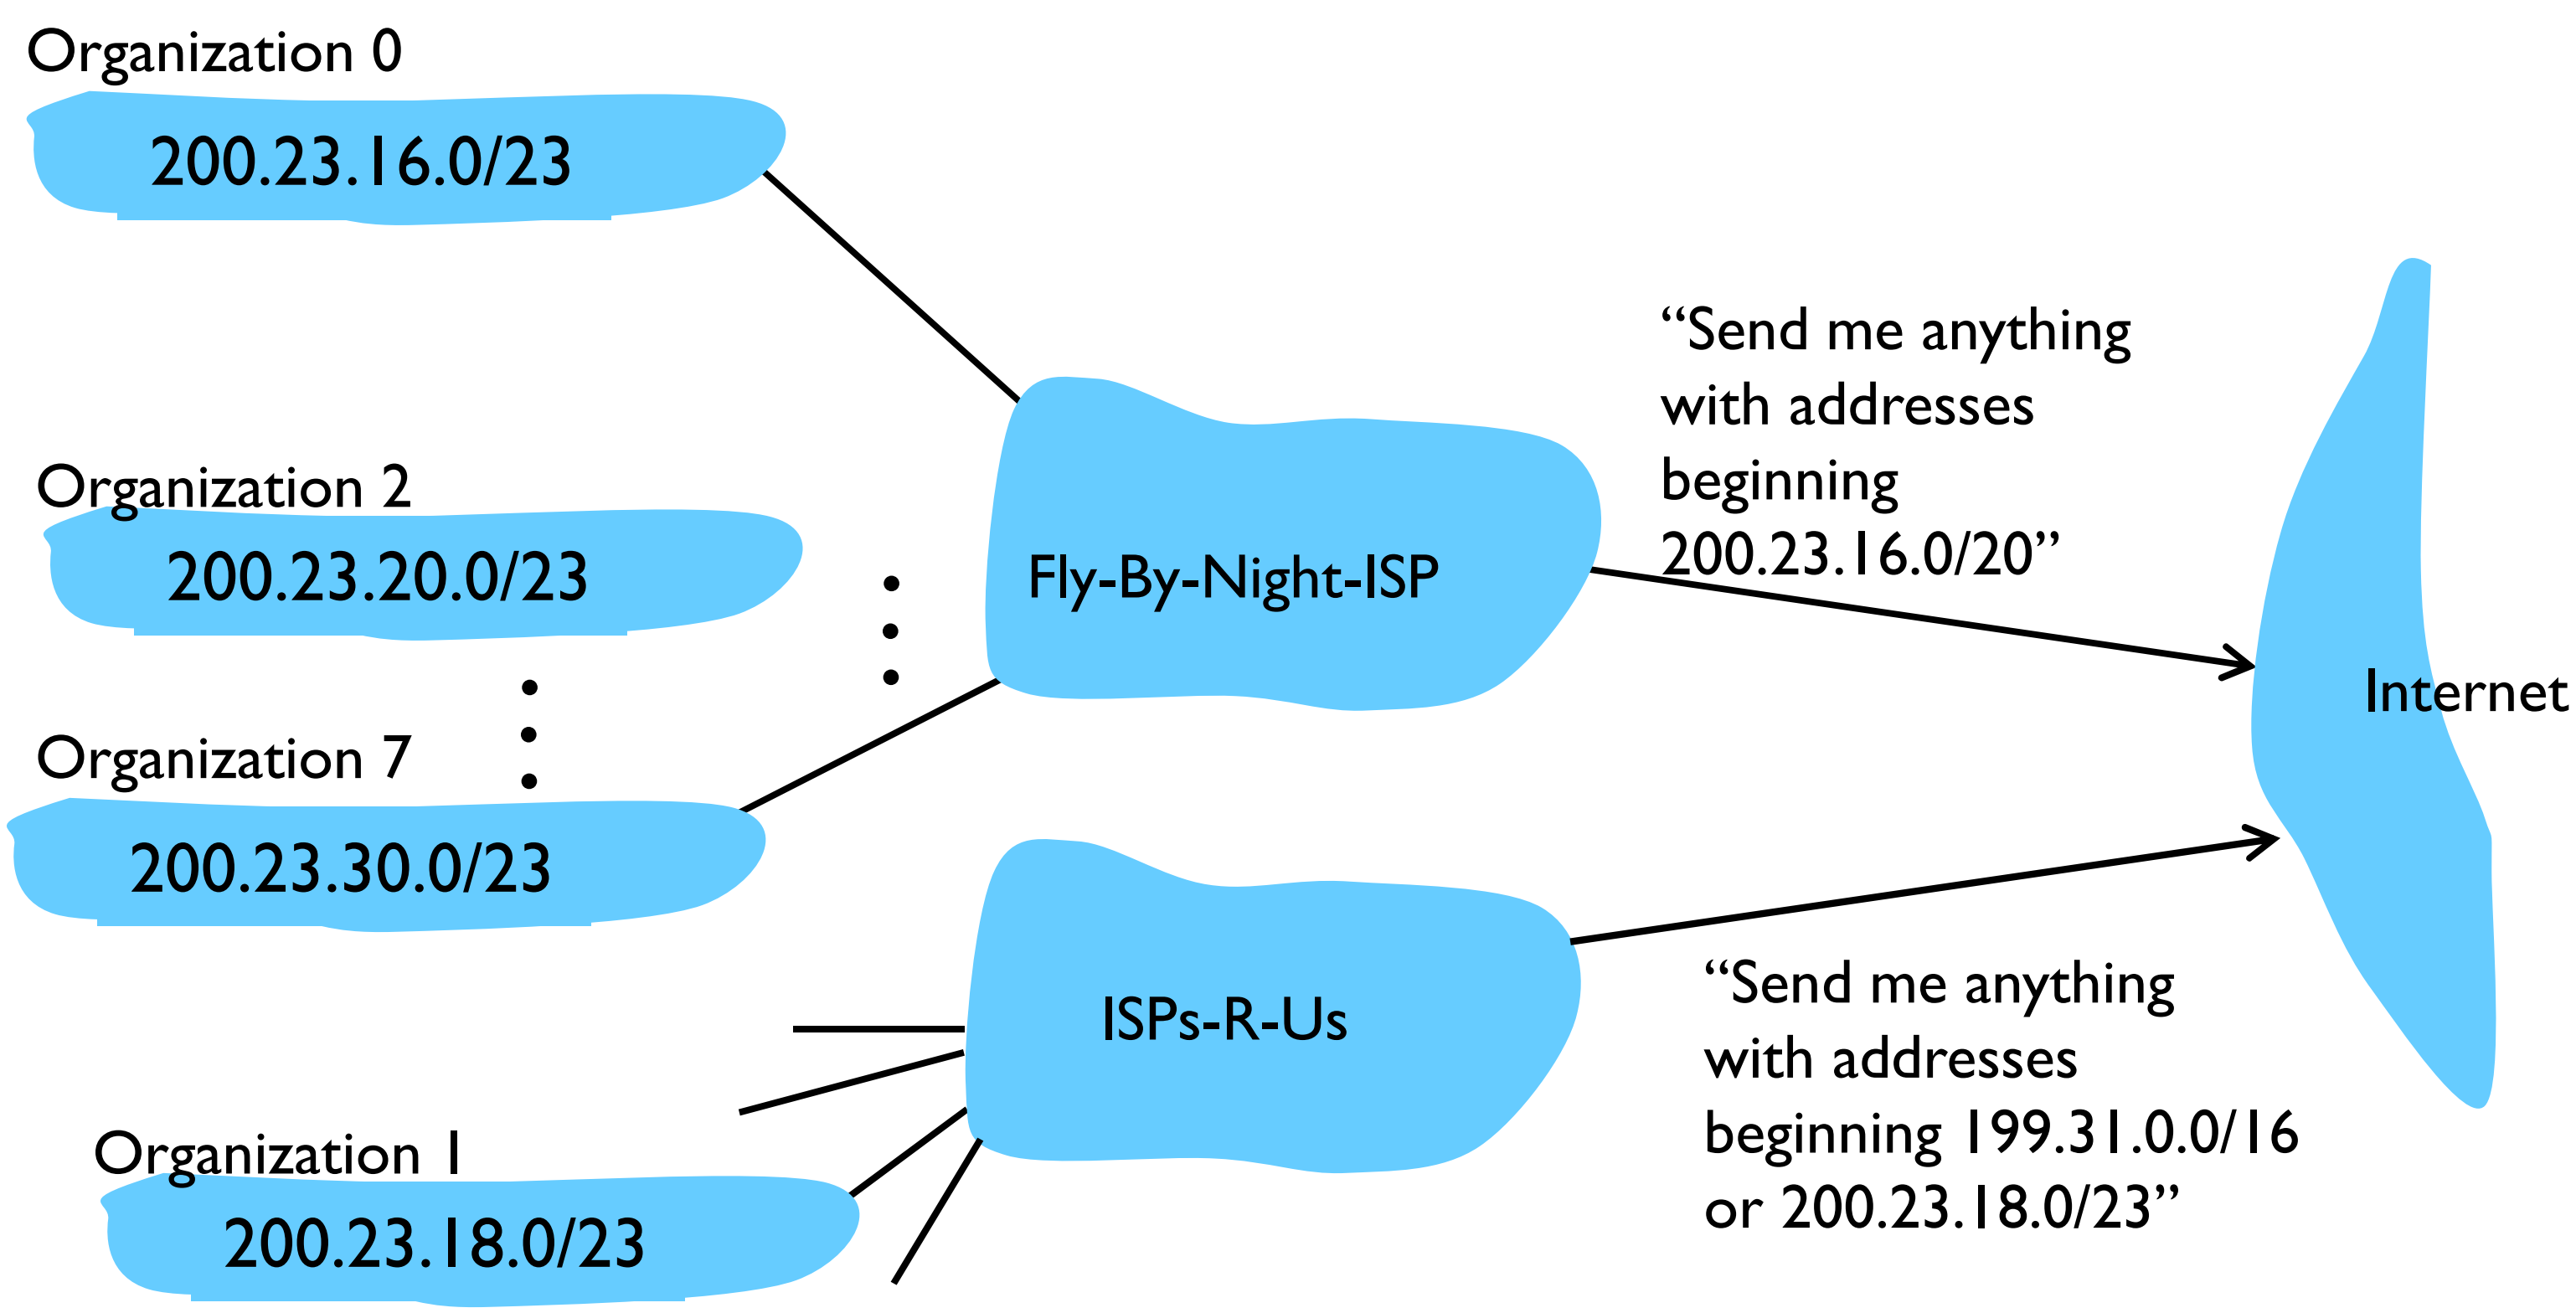

IP addressing: the last word...

Q: How does an ISP get block of addresses?

A: ICANN: Internet Corporation for Assigned Names and Numbers

- allocates addresses
- manages DNS
- assigns domain names, resolves disputes

NAT: Network Address Translation

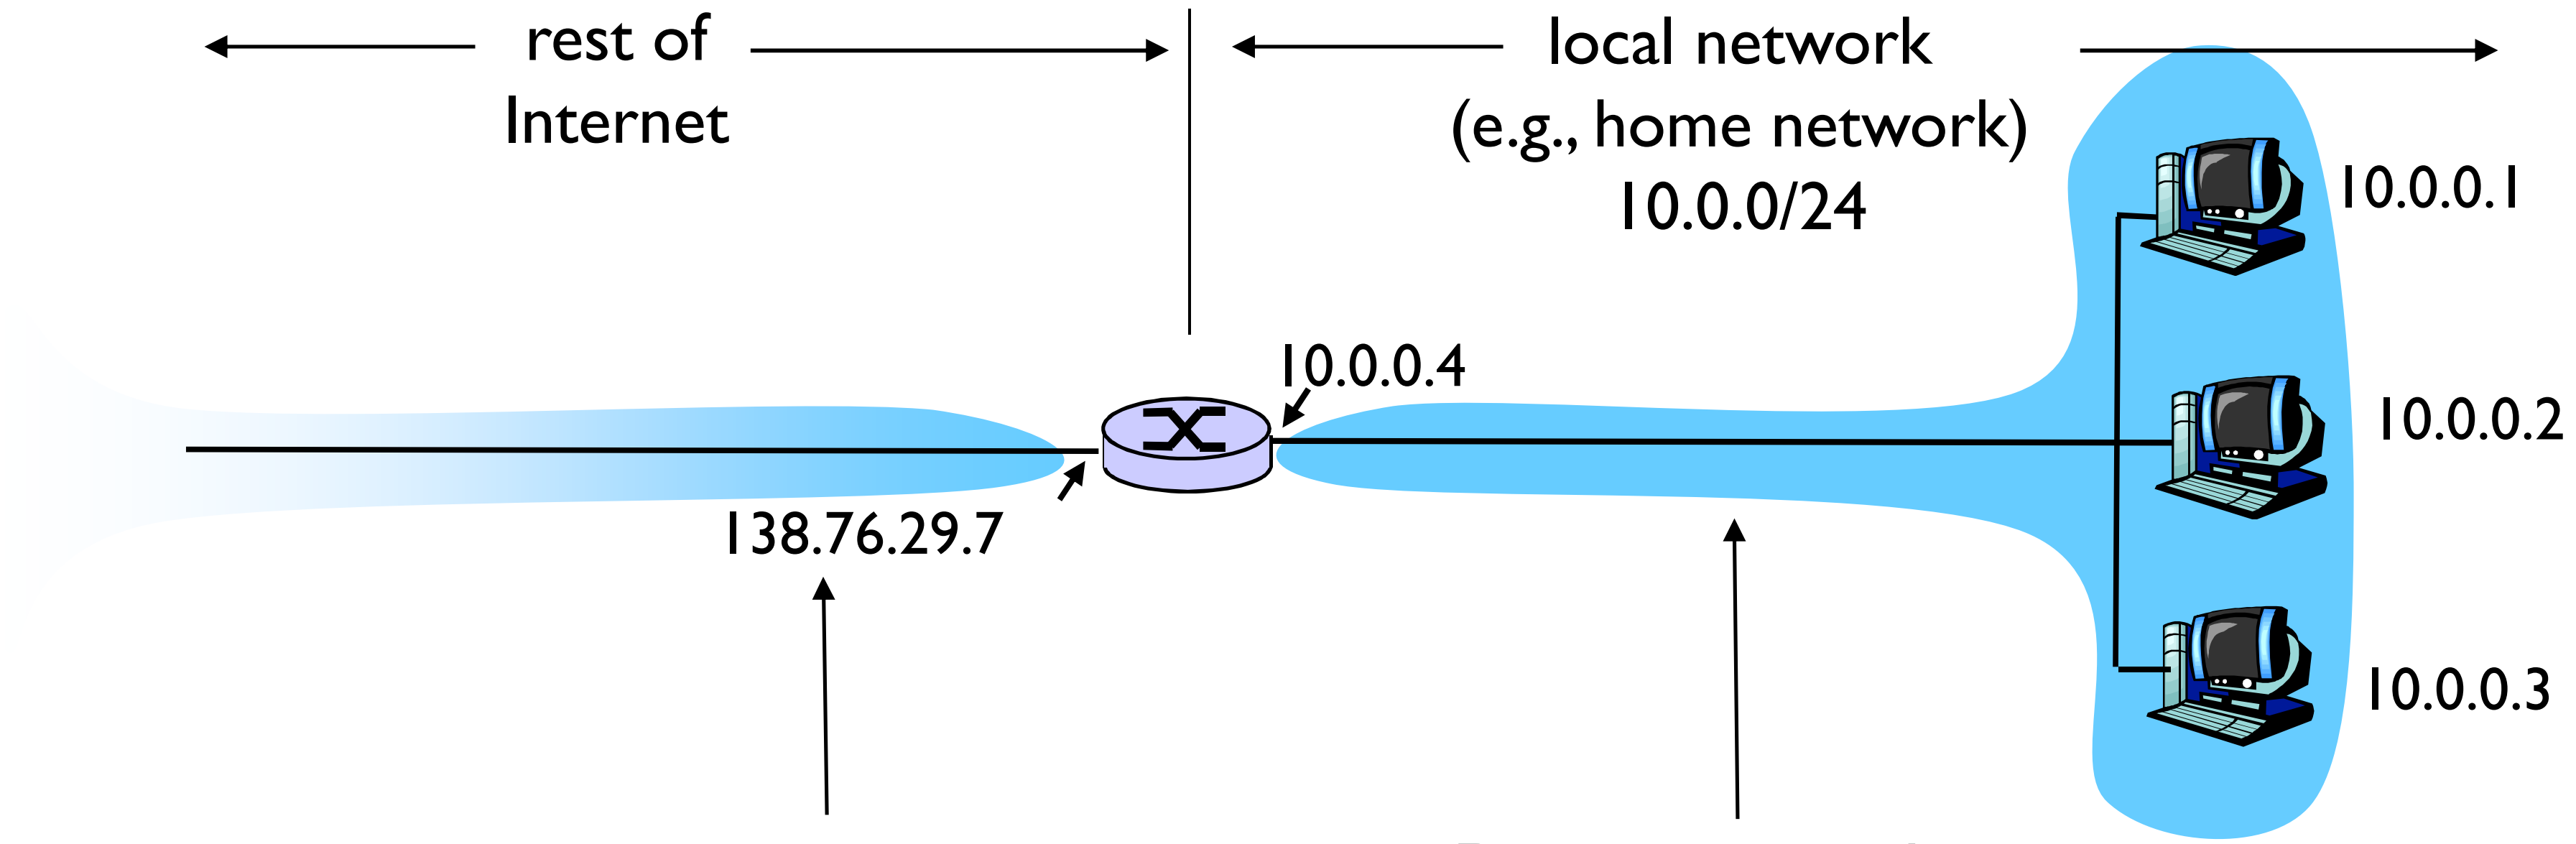

All datagrams *leaving* local network have same single source NAT IP address: 138.76.29.7, different source port numbers

Datagrams with source or destination in this network have 10.0.0/24 address for source, destination (as usual)

NAT: Network Address Translation

- Motivation: Why are NAT's so useful?

NAT: Network Address Translation

- Motivation: local network uses just one IP address as far as outside world is concerned:
  1. range of addresses not needed from ISP: just one IP address for all devices
  2. can change addresses of devices in local network without notifying outside world
  3. can change ISP without changing addresses of devices in local network
  4. devices inside local net not explicitly addressable, visible by outside world (a security plus).

NAT: Network Address Translation

Implementation: NAT router must:

- *outgoing datagrams: replace* (source IP address, port #) of every outgoing datagram to (NAT IP address, new port #)

  . . . remote clients/servers will respond using (NAT IP address, new port #) as destination addr.

- *remember (in NAT translation table)* every (source IP address, port #) to (NAT IP address, new port #) translation pair

- *incoming datagrams: replace* (NAT IP address, new port #) in dest fields of every incoming datagram with corresponding (source IP address, port #) stored in NAT table

NAT: Network Address Translation

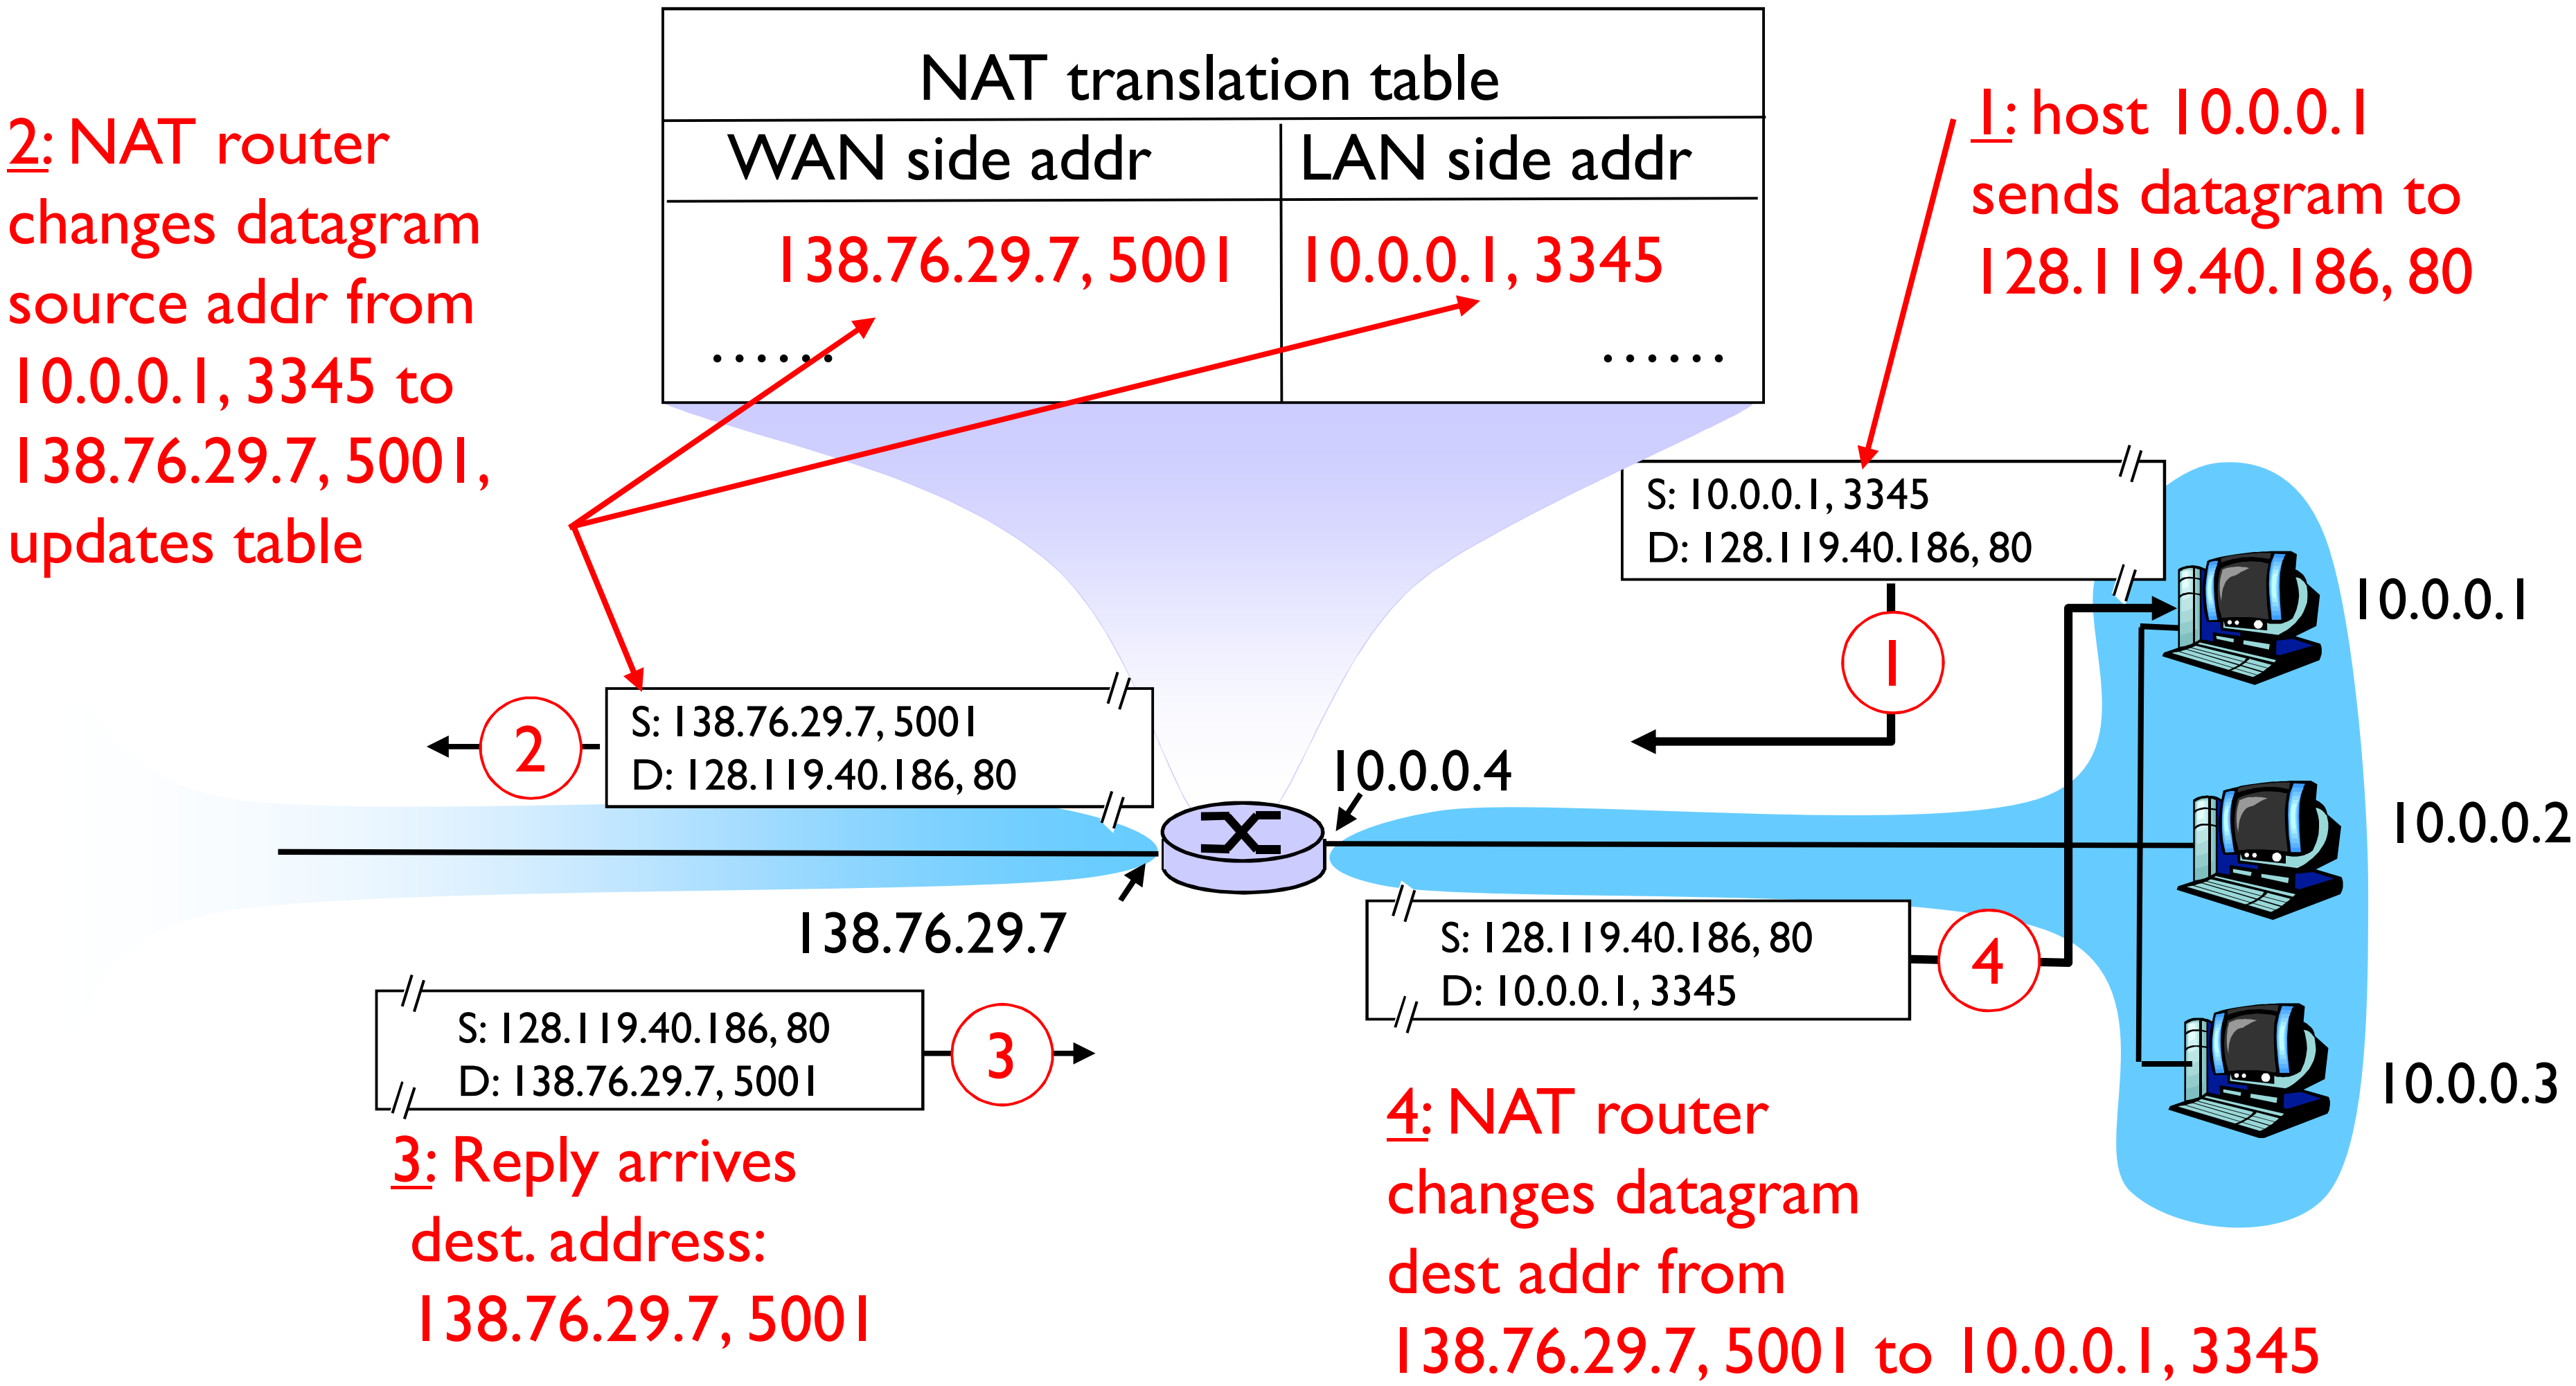

NAT: Network Address Translation

- 16-bit port-number field:
  - 60,000 simultaneous connections with a single LAN-side address!
- NAT is controversial:
  - **Why would anyone have a problem with NATs??**

NAT: Network Address Translation

- NAT is controversial:
  1. routers should only process up to layer 3
  2. violates end-to-end argument

     NAT possibility must be taken into account by app designers, e.g., P2P applications
  3. address shortage should instead be solved by IPv6

NAT traversal problem

- client wants to connect to server with address 10.0.0.1
  - server address 10.0.0.1 local to LAN (client can't use it as destination addr)
  - only one externally visible NATed address: 138.76.29.7

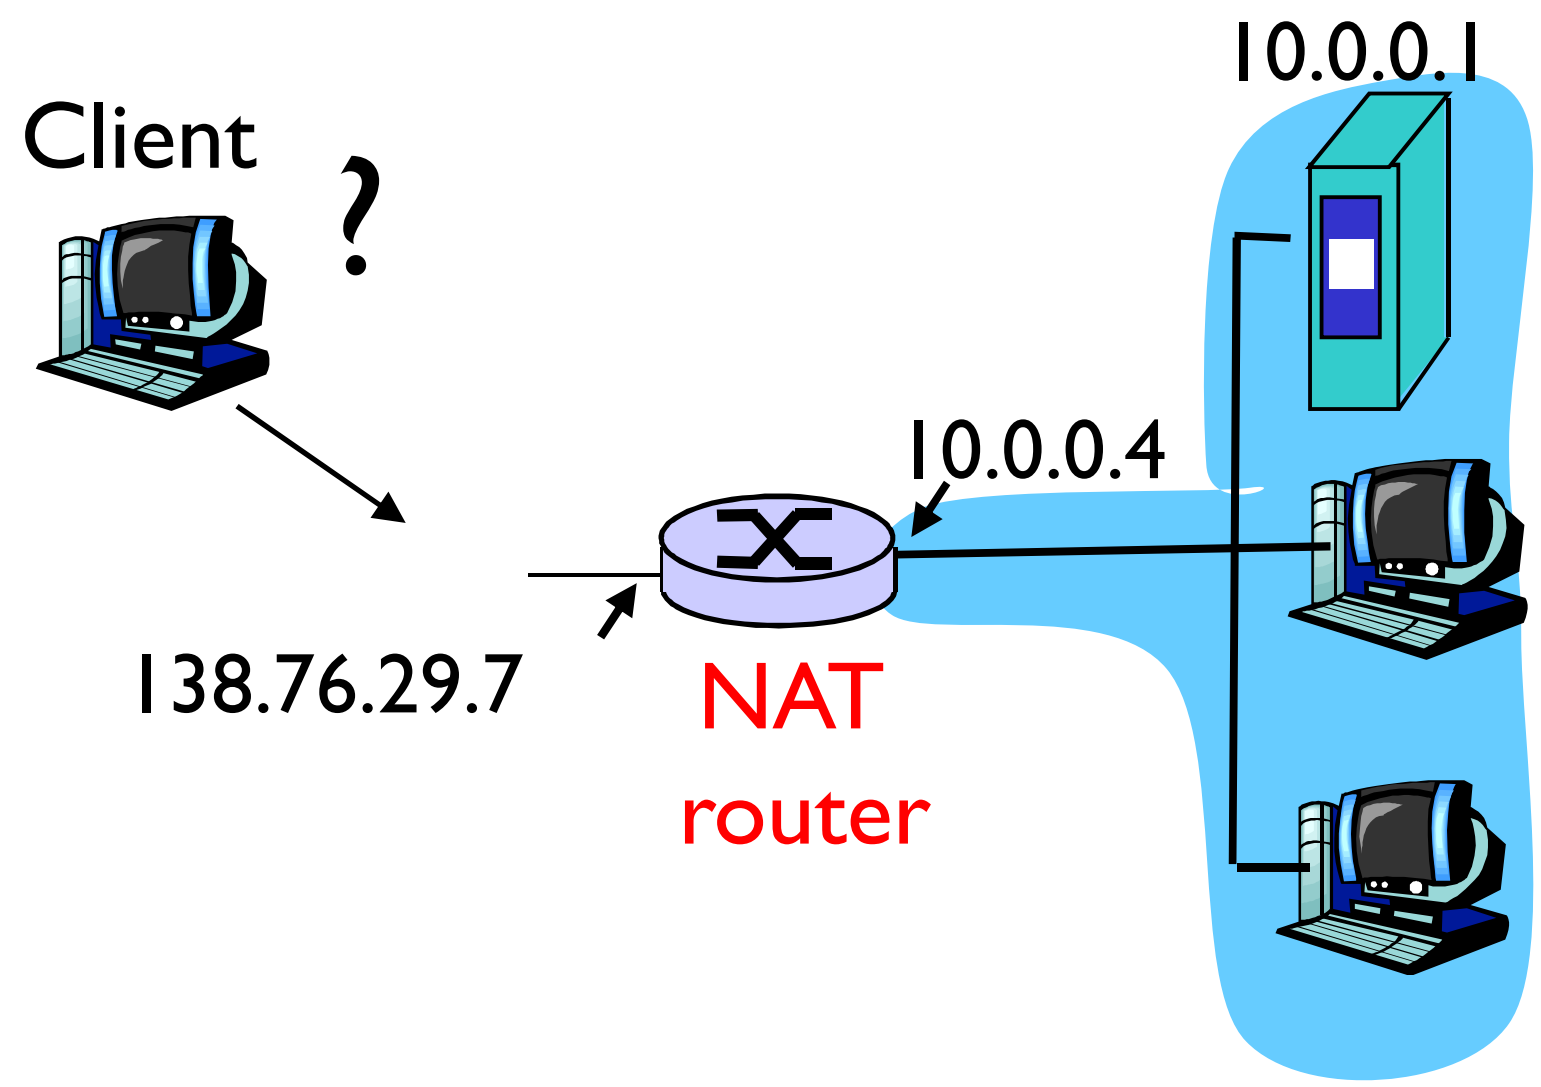

- **Can you think of a good solution?**

NAT traversal problem

- client wants to connect to server with address 10.0.0.1
  - server address 10.0.0.1 local to LAN (client can't use it as destination addr)
  - only one externally visible NATed address: 138.76.29.7
- solution 1: ***statically configure*** NAT to forward incoming connection requests at given port to server
  - e.g., (138.76.29.7, port 2500) always forwarded to 10.0.0.1 port 25000

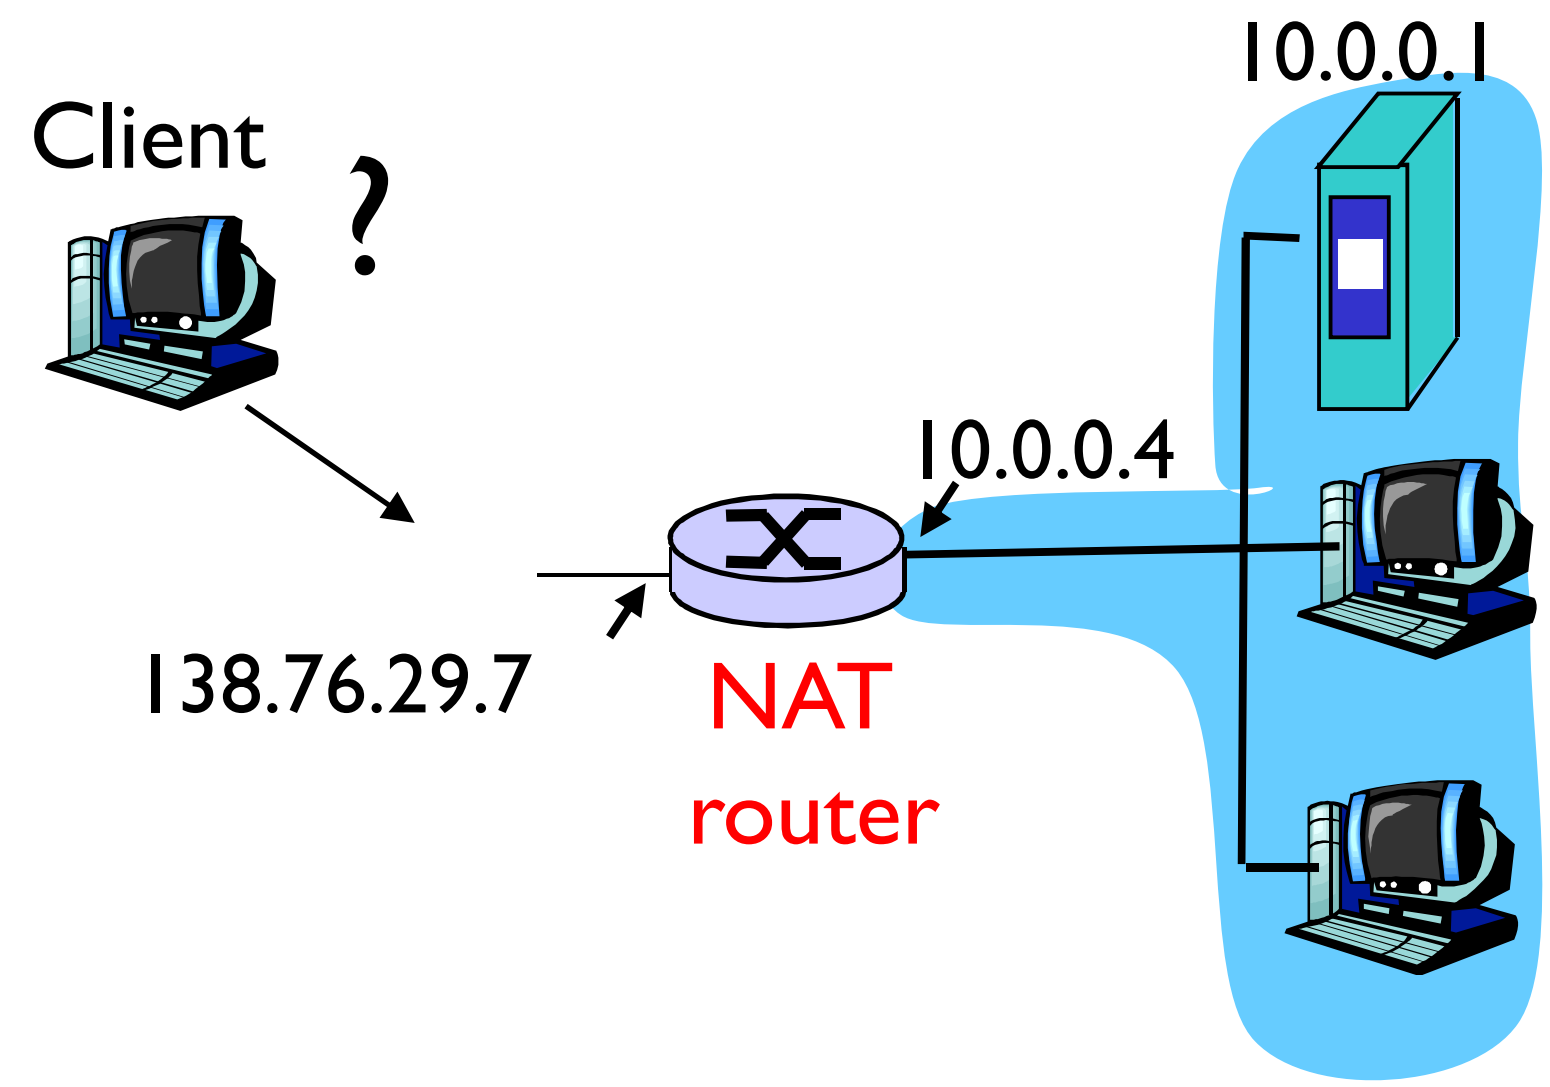

NAT traversal problem

- solution 2: Universal Plug and Play (UPnP) ***Internet Gateway Device (IGD) Protoco***l. Allows NATed host to:
  - learn public IP address (138.76.29.7)
  - add/remove port mappings (with lease times)

i.e., ***automate*** static NAT port map configuration

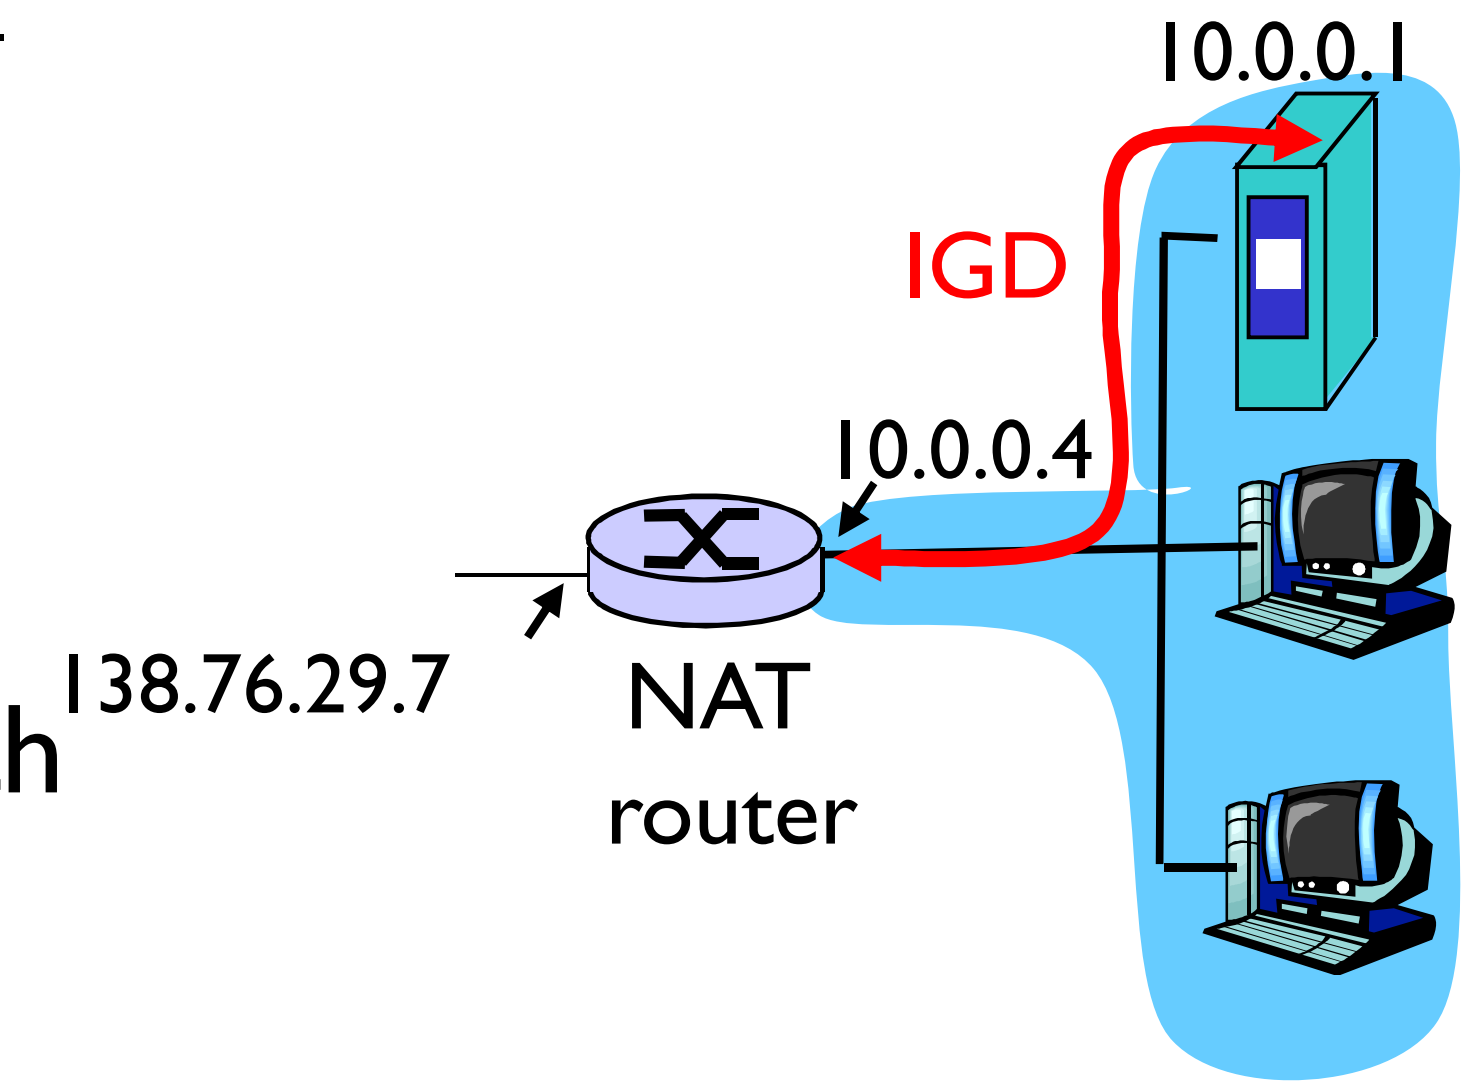

NAT traversal problem

- solution 3: ***relaying*** (used in Skype)
  - NATed client establishes connection to relay
  - External client connects to relay
  - relay bridges packets between to connections

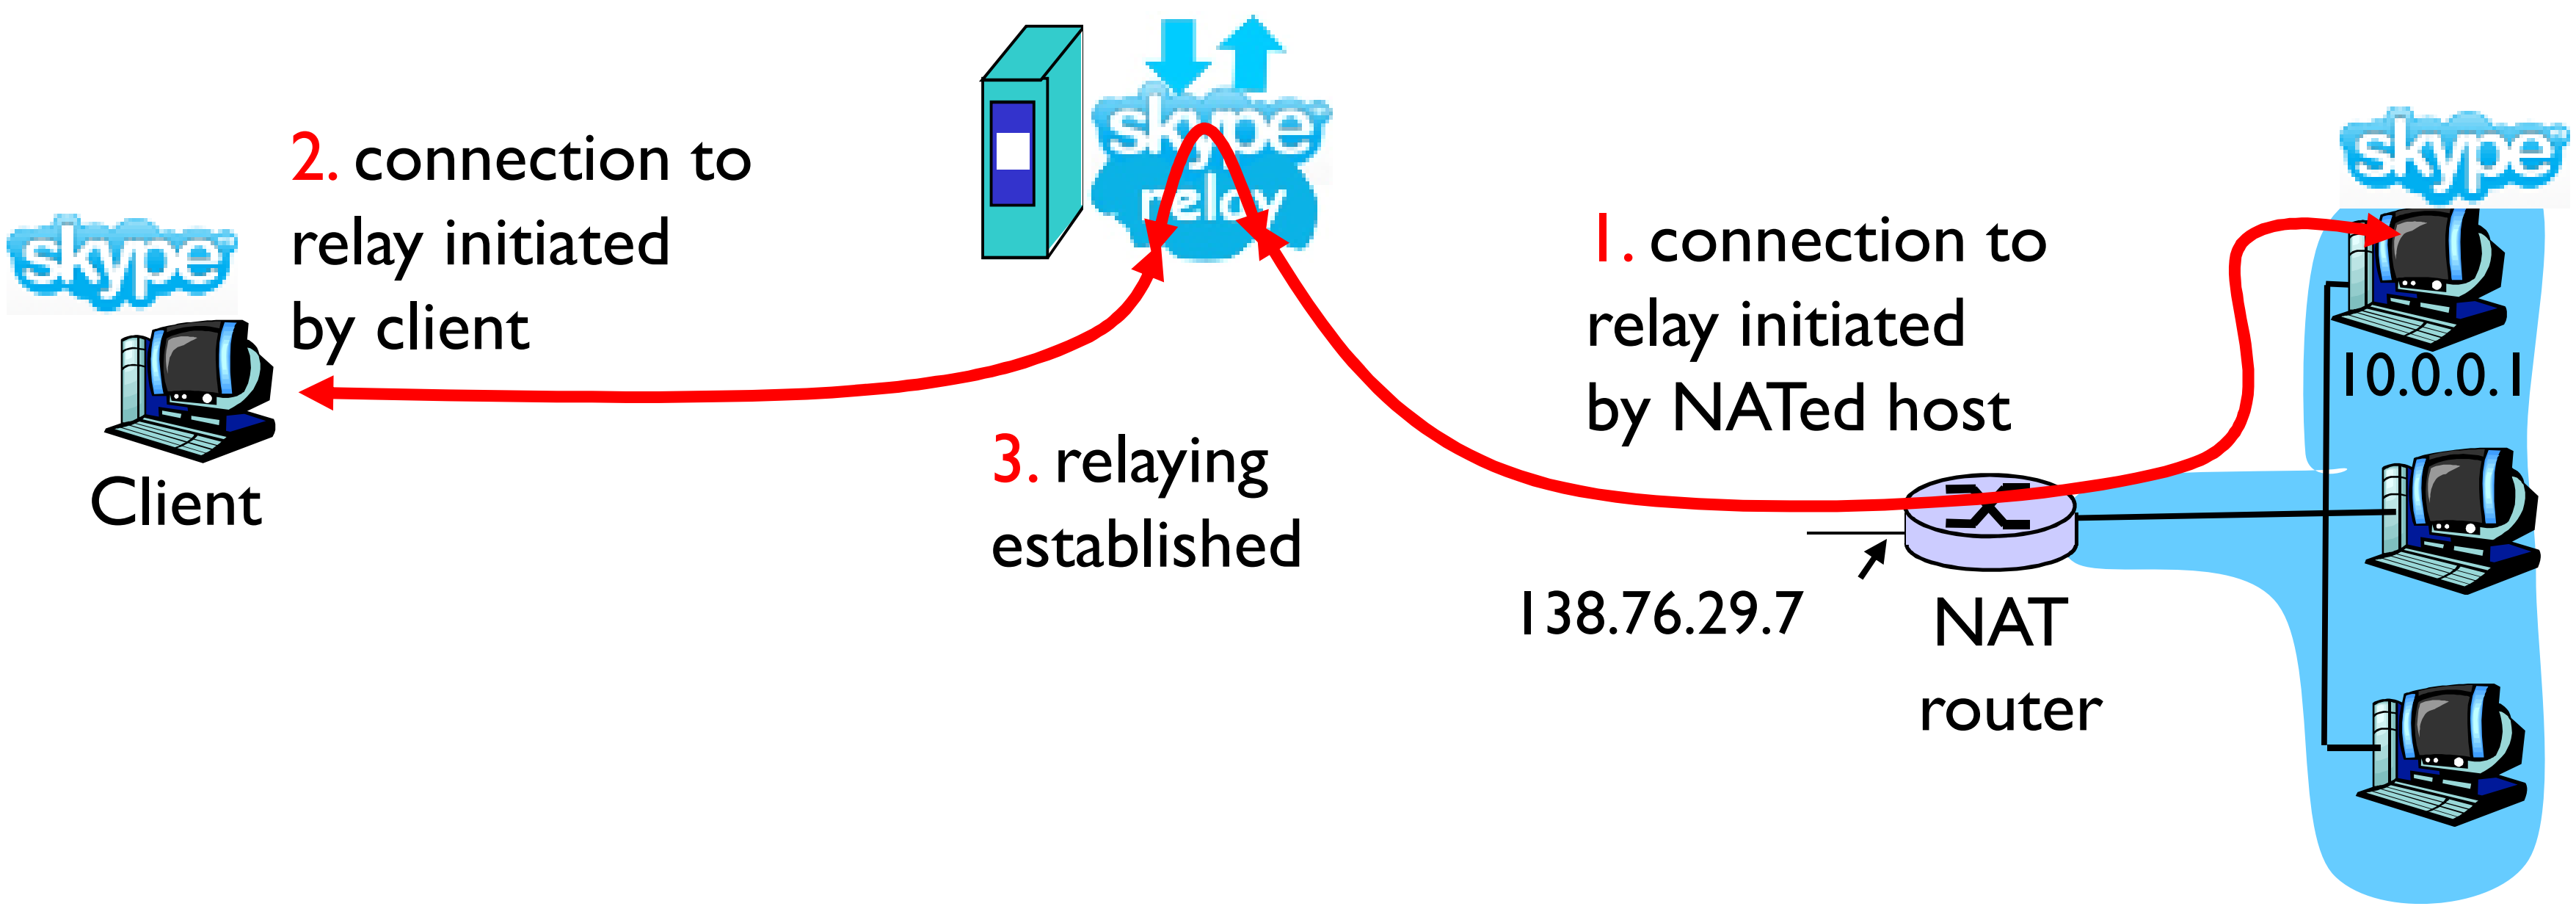

IPv6

- Initial motivation: 32-bit address space is completely allocated.
- Additional motivation:
  - Modify header format to help speed processing/forwarding

Can you identify IPv4 datagram fields that are candidates for change to speed up processing?

IP datagram format

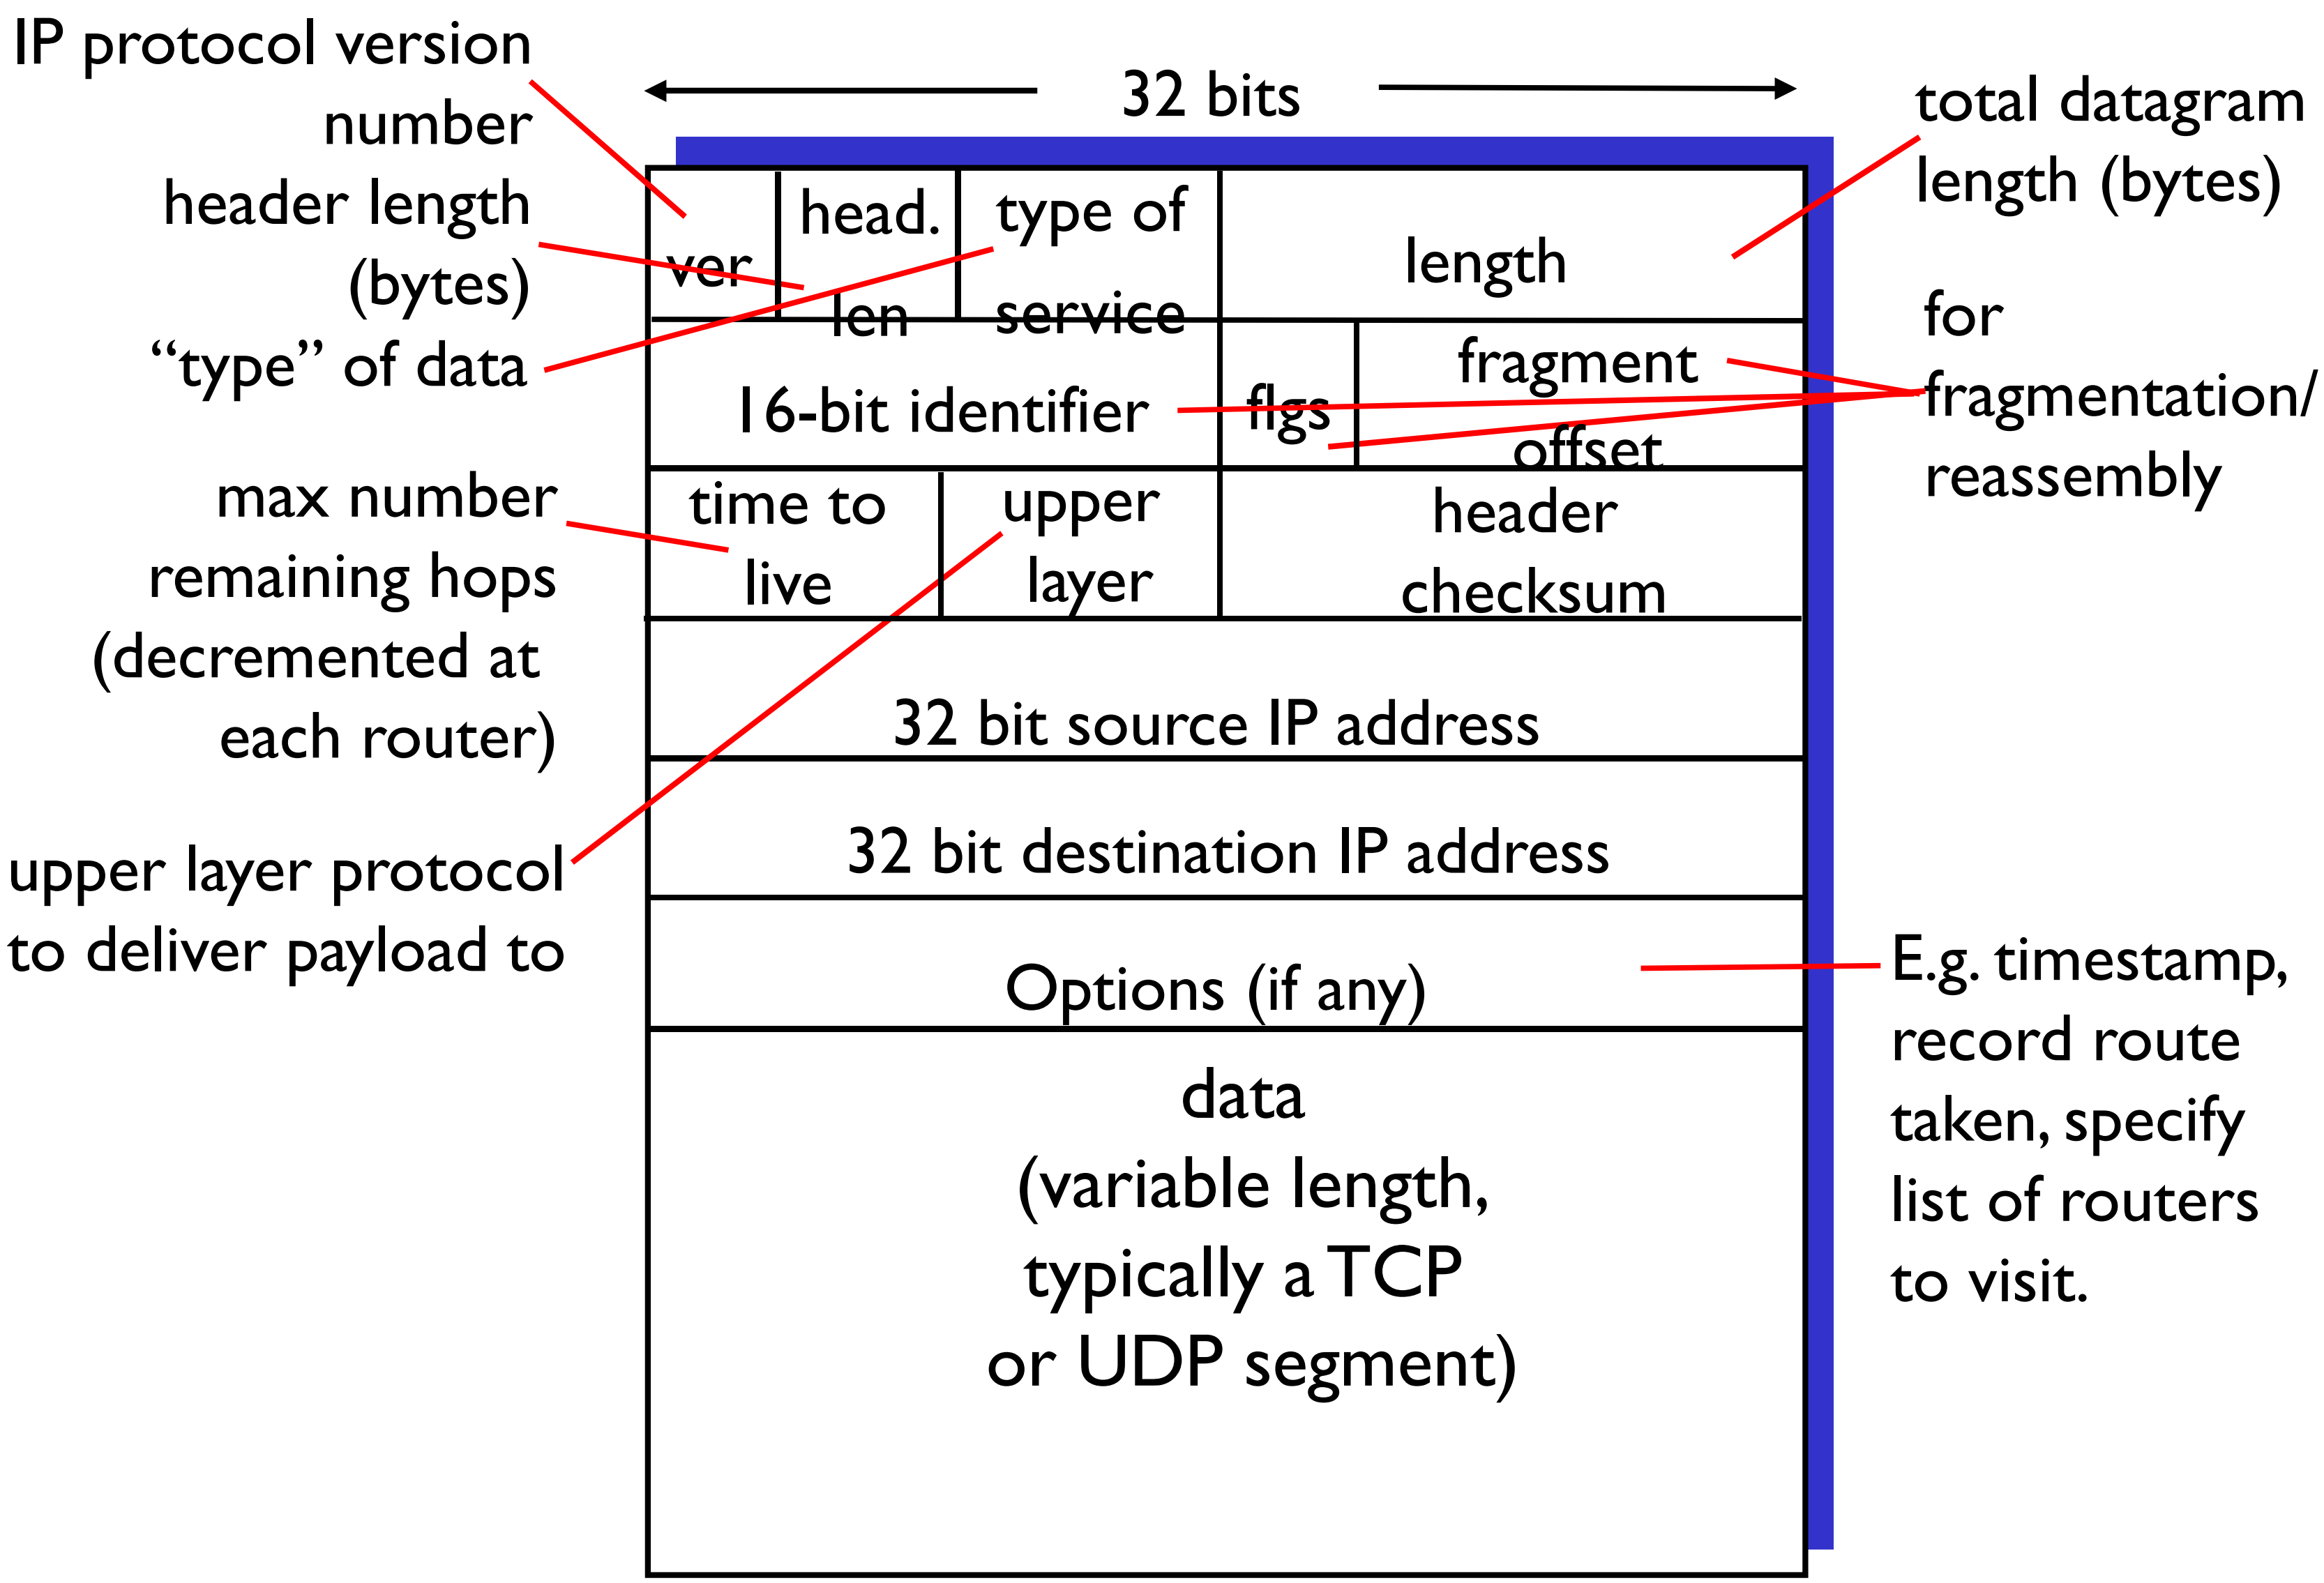

IPv6

- Initial motivation: 32-bit address space is completely allocated.
- Additional motivation:
  - header format helps speed processing/forwarding
  - header changes to facilitate QoS

  IPv6 datagram format:
  - ***fixed-length 40 byte header***
  - ***no fragmentation allowed***

IPv6 datagram format

Traffic class: type of service/priority

flow label: identify datagrams in same "flow."
(concept of "flow" not well defined).

next header: identify upper layer protocol for data

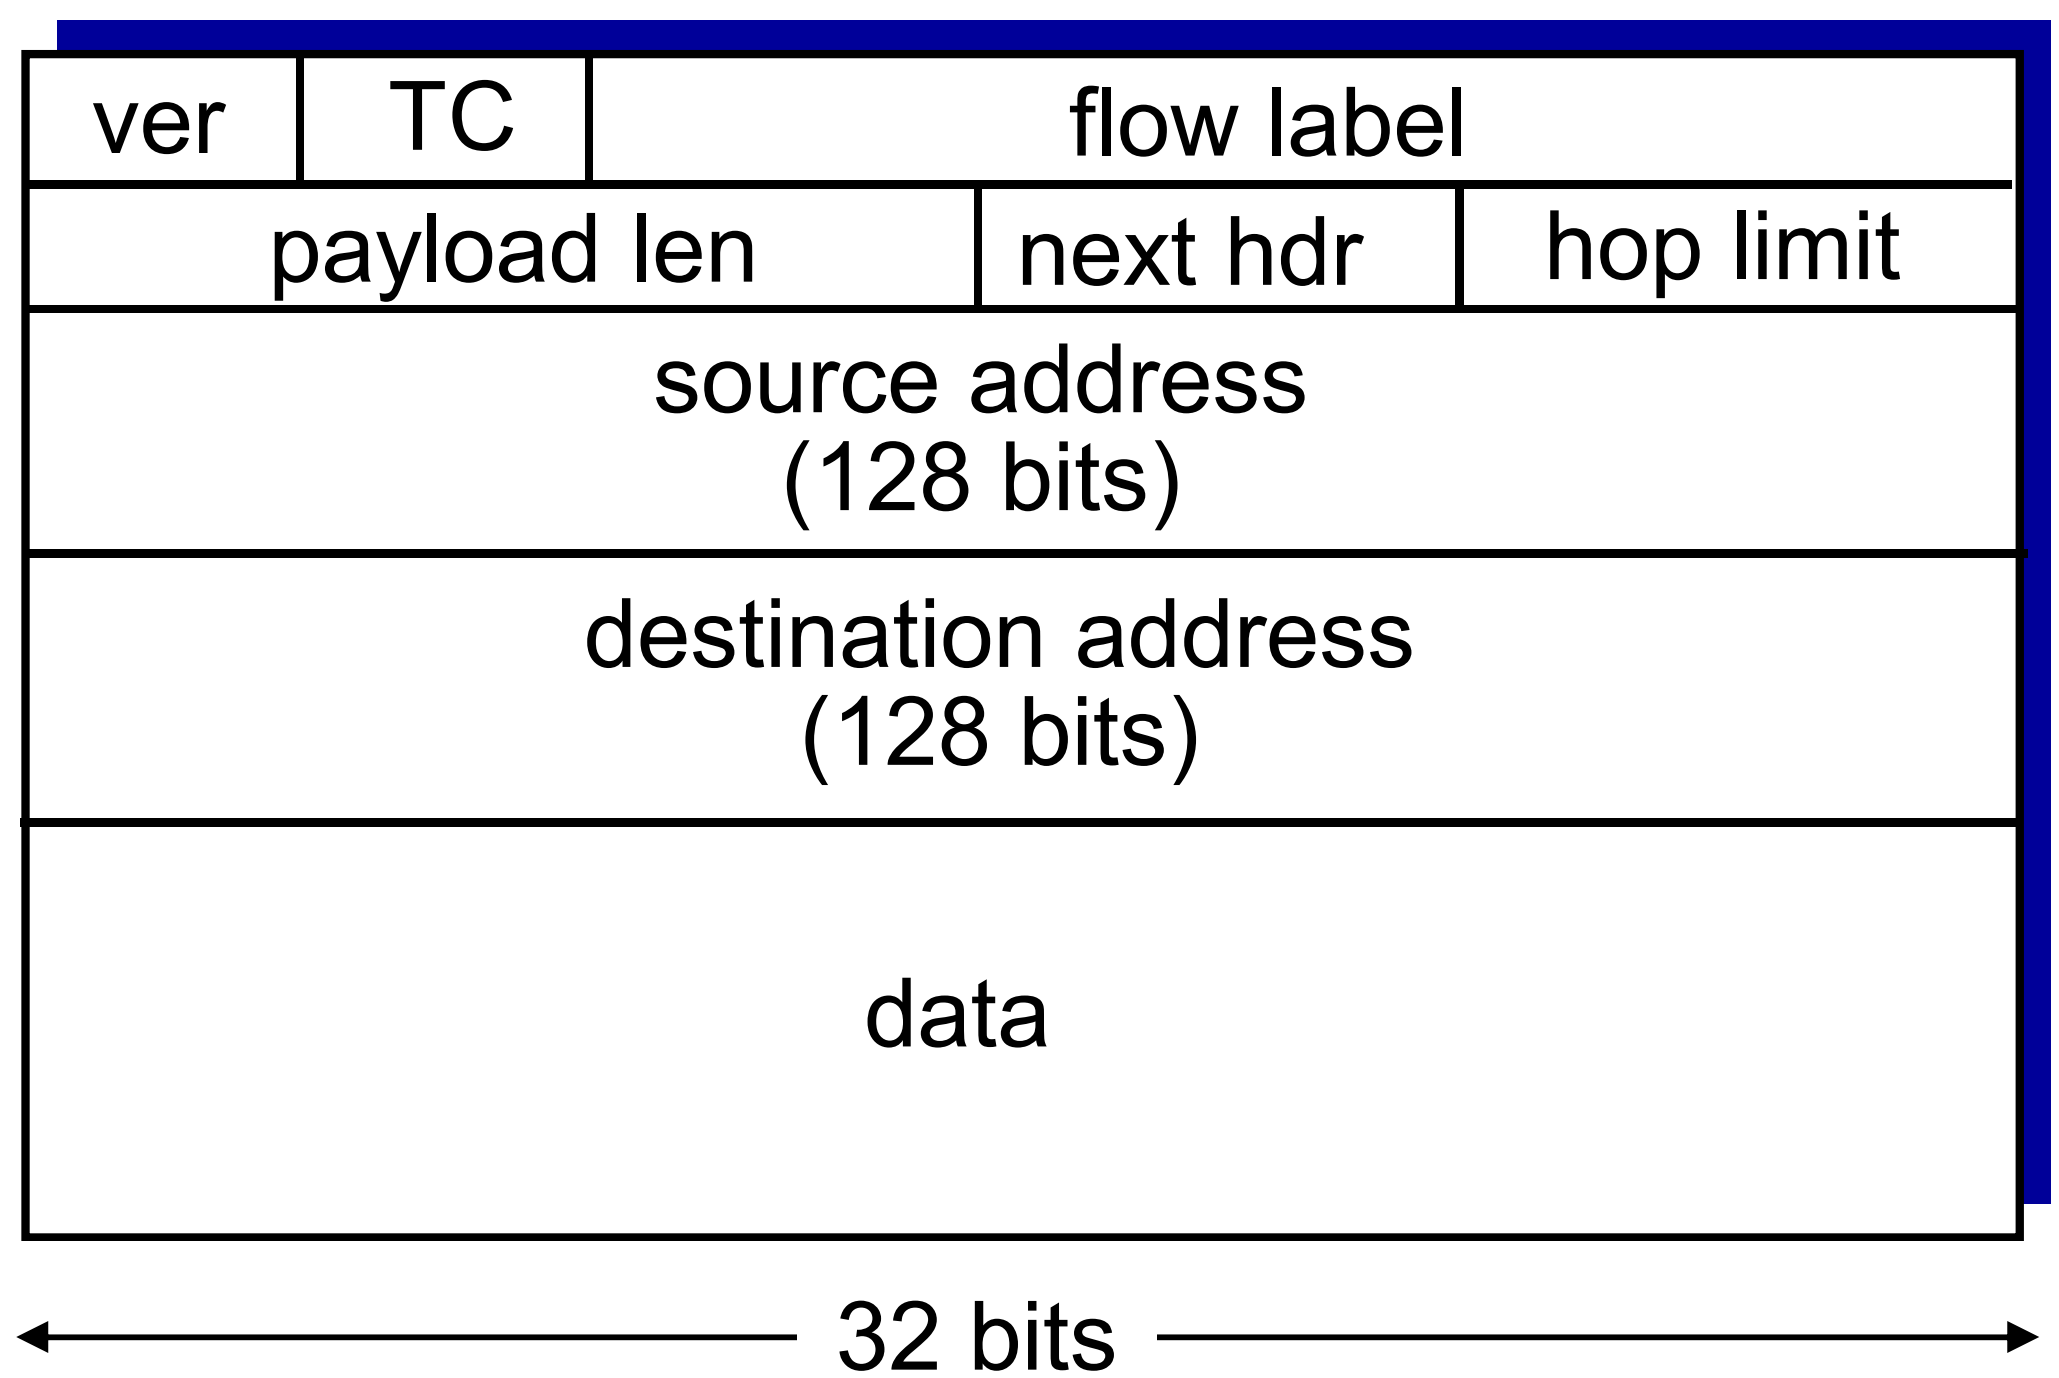

Other Changes from IPv4

- *Checksum:* removed entirely to reduce processing time at each hop
- *Options:* allowed, but outside of header, indicated by "Next Header" field
- *ICMPv6:* new version of ICMP
  - additional message types, e.g. "Packet Too Big"
  - multicast group management functions

Transition From IPv4 To IPv6

- Not all routers can be upgraded simultaneous
  - no time when we can shut down the internet for a few hours……….
  - **How will the network operate with mixed IPv4 and IPv6 routers? Can you think of a human protocol analogy?**

Transition from IPv4 to IPv6

- not all routers can be upgraded simultaneously
- **tunneling:** **IPv6 datagram carried as payload in IPv4 datagram among IPv4 routers**

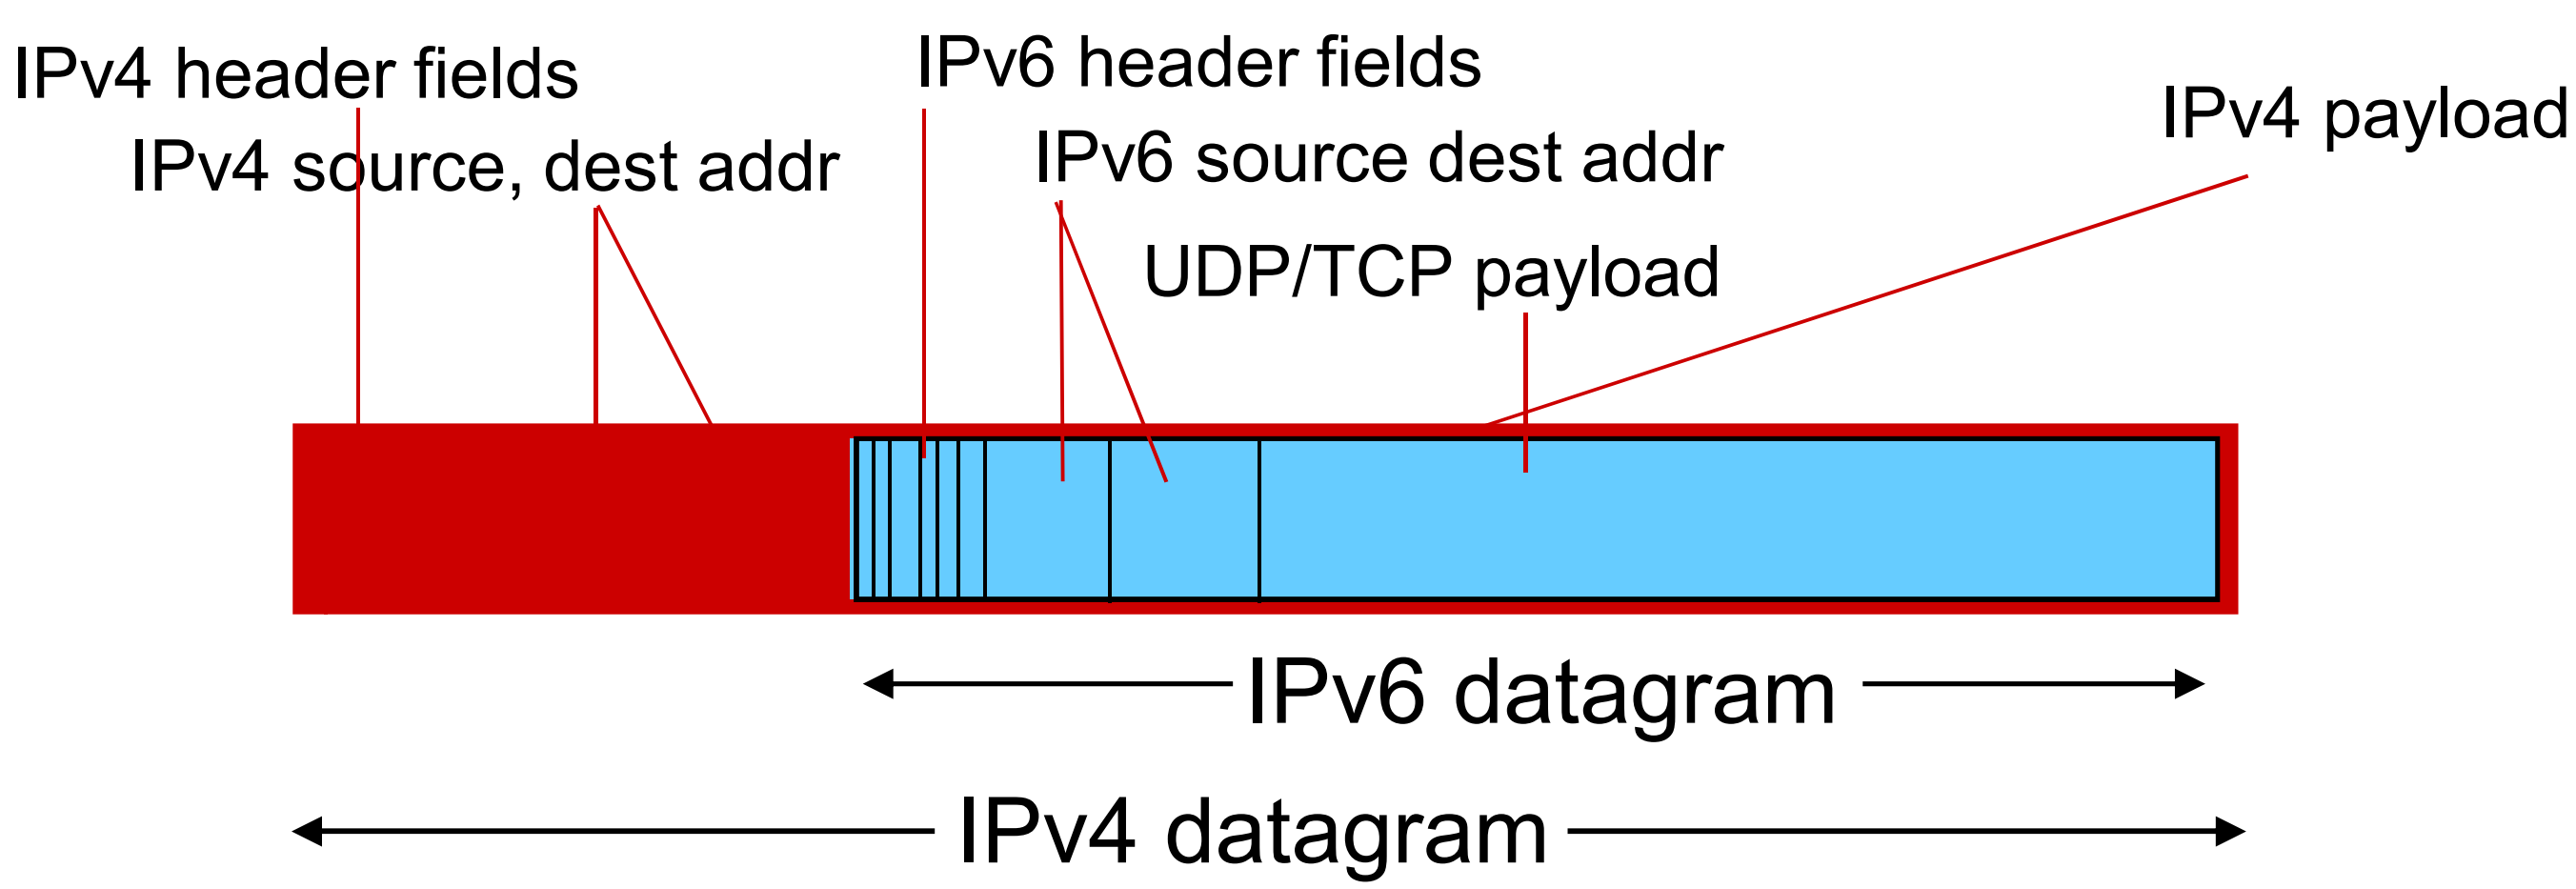

Tunneling

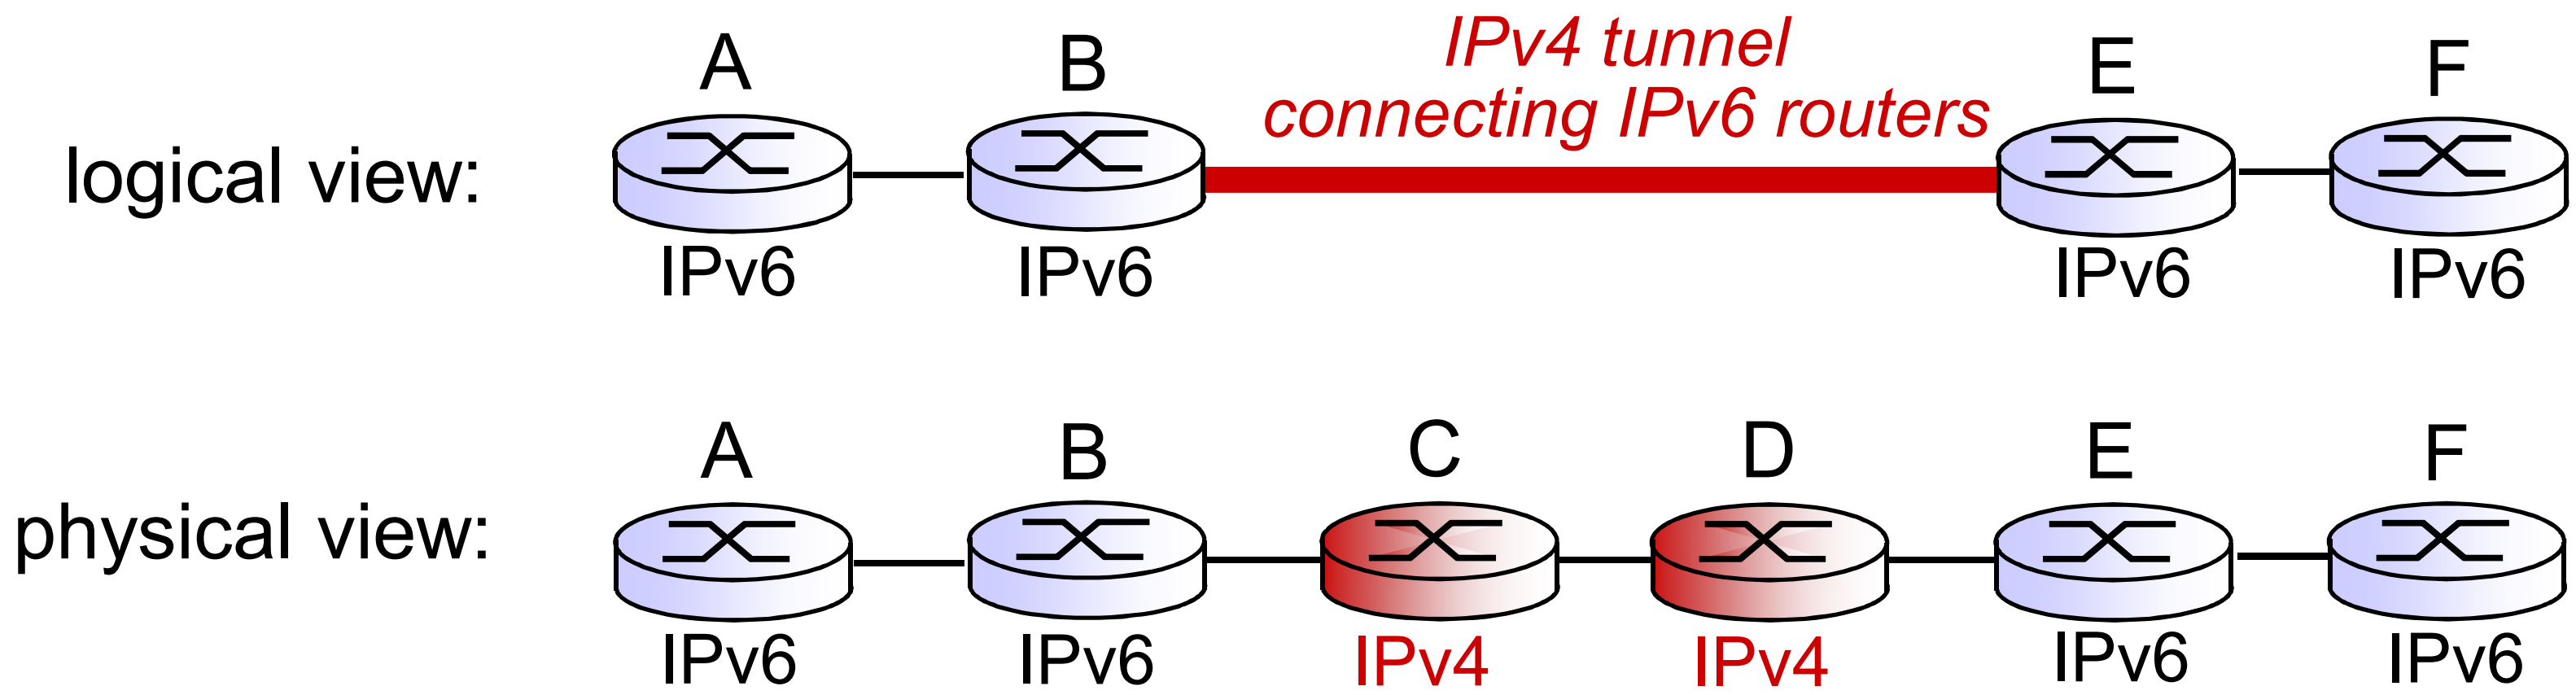

logical view:
A
B
IPv4 tunnel
connecting IPv6 routers
E
F
IPv6
IPv6
IPv6
IPv6
physical view:
A
B
C
D
E
F
IPv6
IPv6
IPv4
IPv4
IPv6
IPv6

Tunneling

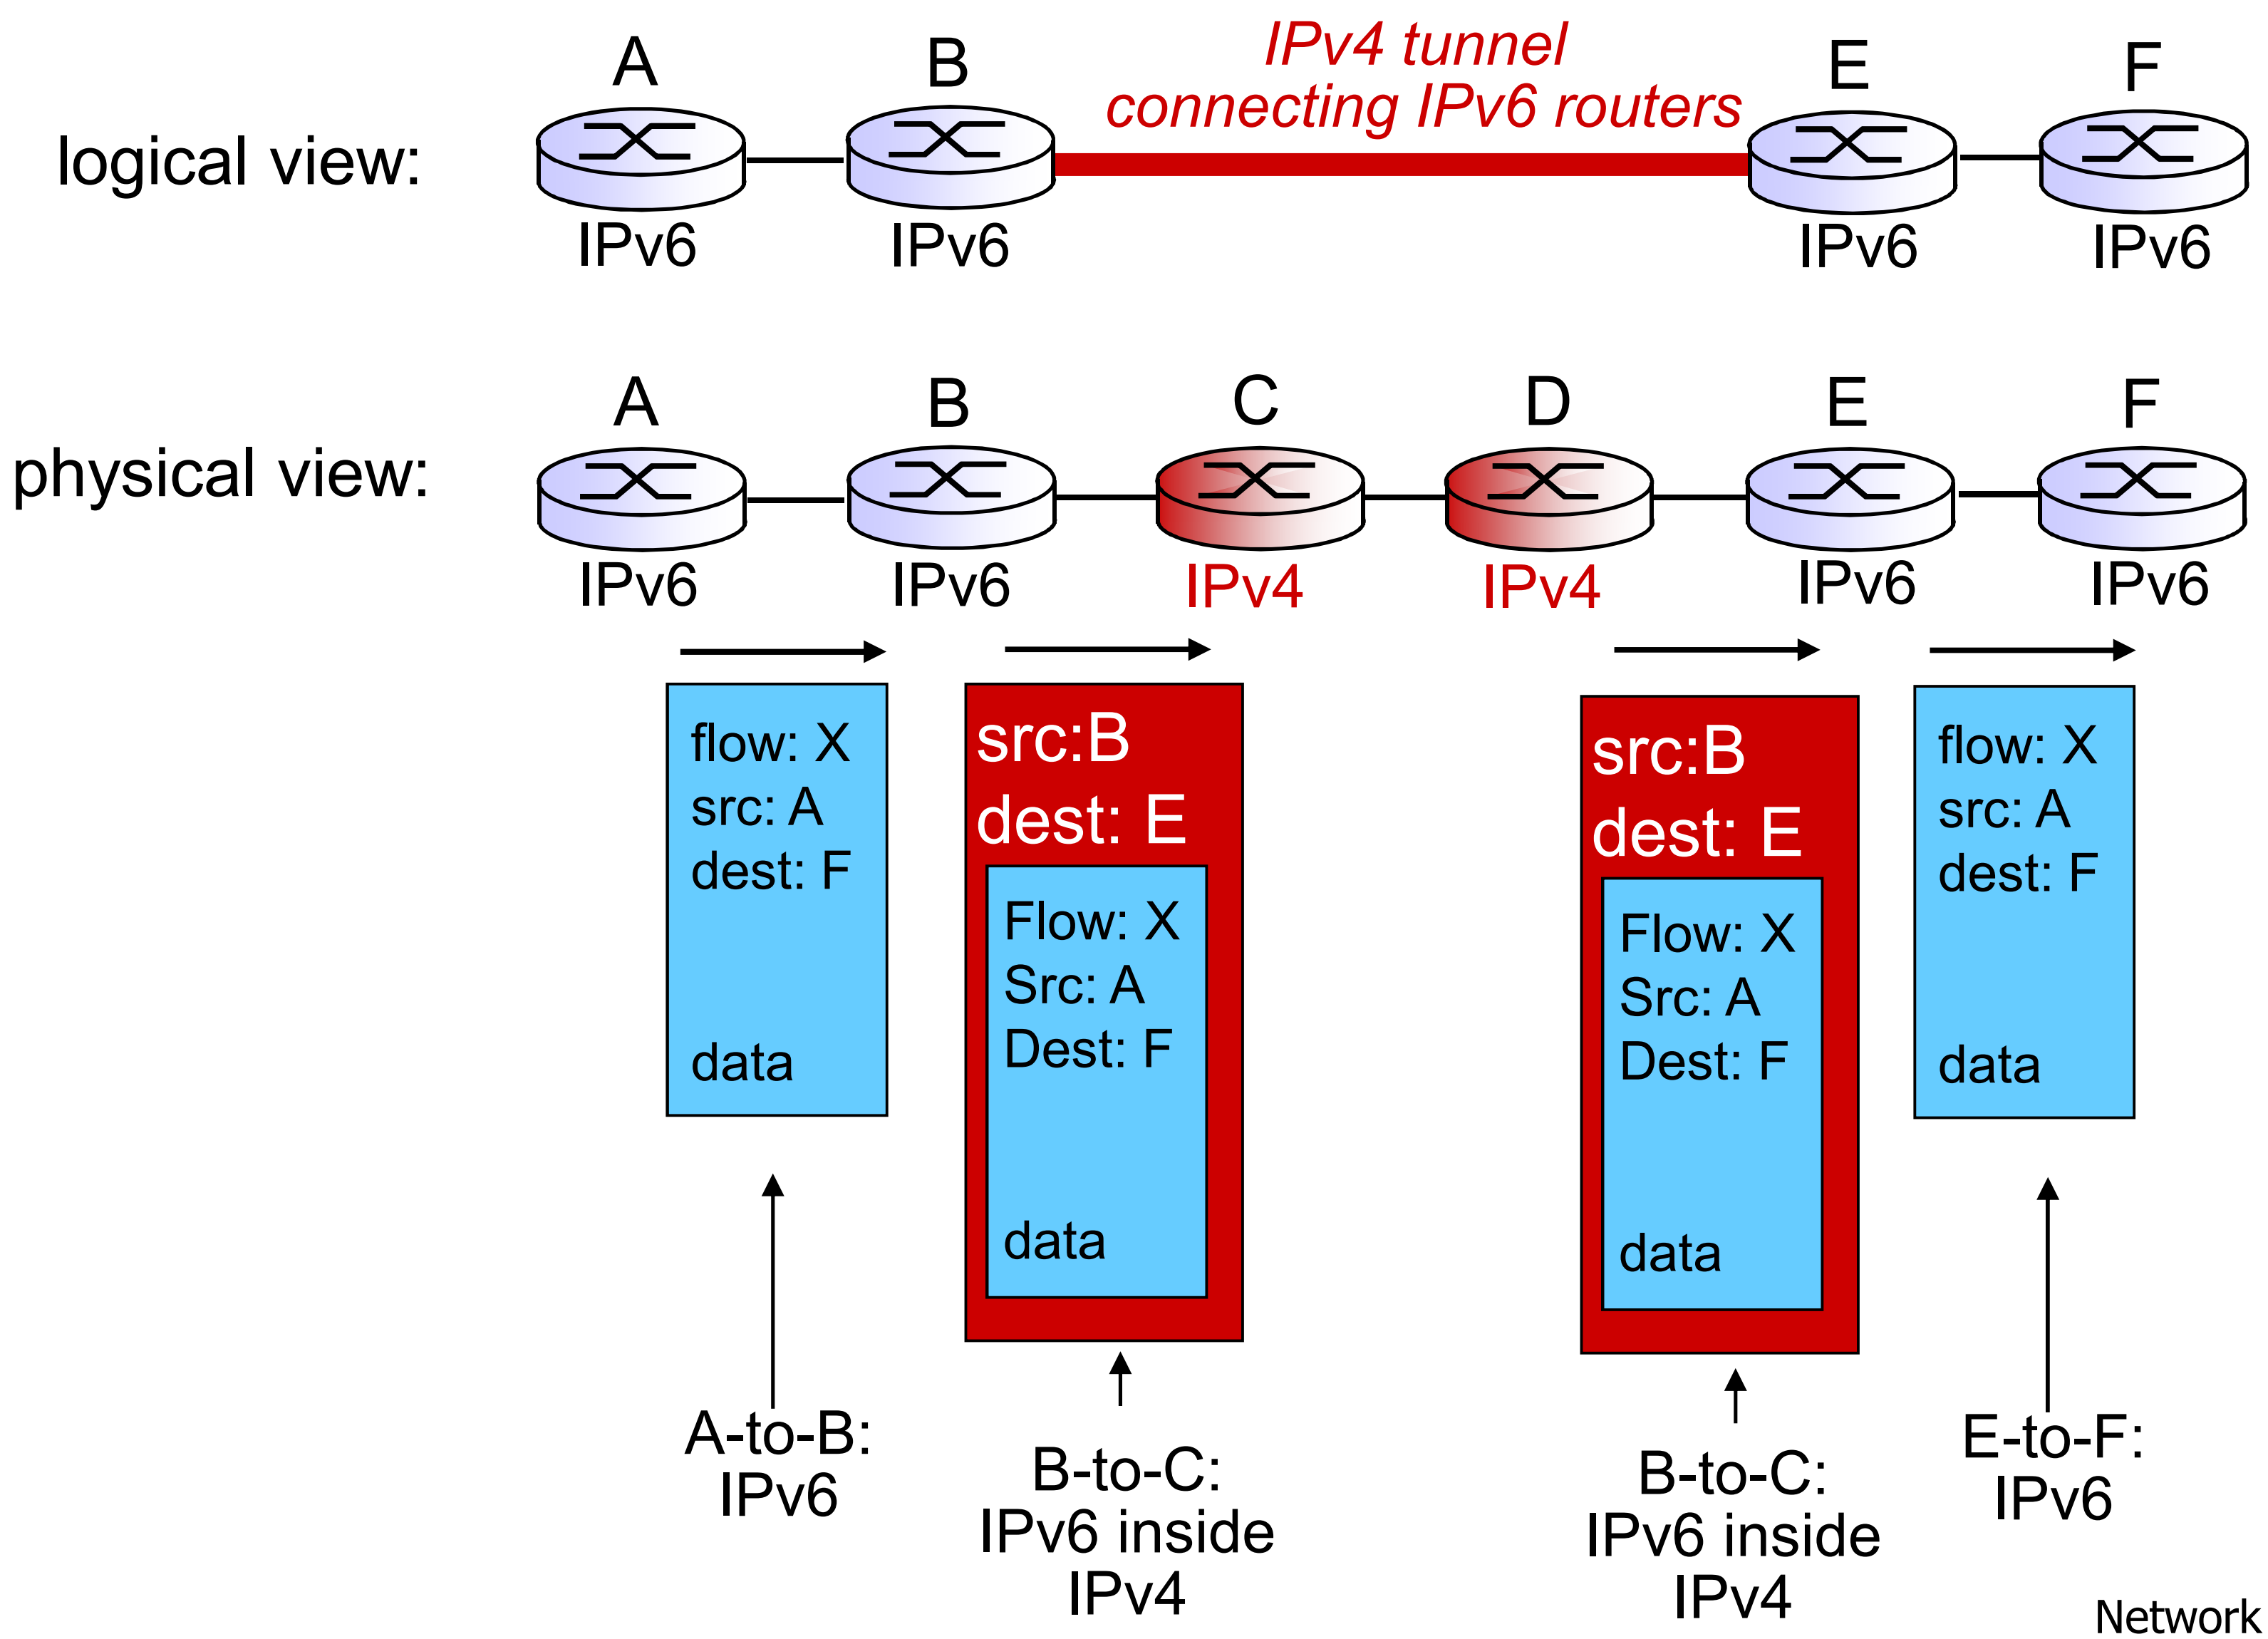

logical view:
A
B
IPv4 tunnel
connecting IPv6 routers
E
F
IPv6
IPv6
IPv6
IPv6
physical view:
A
B
C
D
E
F
IPv6
IPv6
IPv4
IPv4
IPv6
IPv6
flow: X
src: A
dest: F
data
src:B
dest: E
Flow: X
Src: A
Dest: F
data
src:B
dest: E
Flow: X
Src: A
Dest: F
data
flow: X
src: A
dest: F
data
A-to-B:
IPv6
B-to-C:
IPv6 inside
IPv4
B-to-C:
IPv6 inside
IPv4
E-to-F:
IPv6

Lesson 13: Network Layer – Internet Protocol

- Summary: the Internet Protocol main parts -
  - Datagram format
  - IPv4 addressing and network topology
  - DHCP
  - NAT
  - IPv6 and interconnect with IPv4