

# Power to change life

## Centrifugal & Openwell Pump Agriculture Series




**Kirloskar Oil Engines Limited**

A Kirloskar Group Company

# Openwell Pump

## Agriculture

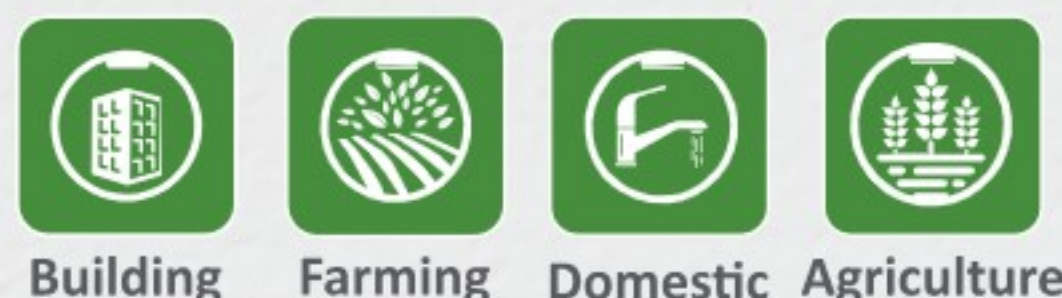

### Specifications:

Speed - 2880 RPM  
Voltage Range - 160 -240 Volts 50 Hz 1 PH  
380 - 415 Volts 50 Hz 3 PH

### Salient Features

- Cast Iron / Stainless Steel Motor Body
- VPI Treatment Stator & Rotor for Long Life of Pump
- High Quality Carbon + Stainless Steel Thrust Bearings
- High Quality Carbon Bush
- Insulation Class - 'B'
- High Grade Noryl / Cast Iron & Dynamically balanced Impeller
- All CI Parts CED Coated

### Material of Construction (MOC)

| PART NAME | MATERIAL     | Winding          | Copper Wire   |
|-----------|--------------|------------------|---------------|
| Body      | Cast Iron/SS | Impeller         | HTB/Cast Iron |
| Shaft     | SS410        | Casing & Adopter | SS/CI-FG 200  |

# Openwell Pump

|   | MODEL            | H.P. | kW  | SUPPLY TYPE | PIPE SIZE (MM) |                  | HEAD IN METERS |     |      |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |    |
|---|------------------|------|-----|-------------|----------------|------------------|----------------|-----|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|
|   |                  |      |     |             |                |                  | 6              | 8   | 10   | 12  | 14  | 16  | 18  | 20  | 22  | 24  | 26  | 28  | 30  | 32  | 34  | 36  | 38 | 40 | 42 |
|   | OW1.3225.15.1.01 | 1.5  | 1.1 | 1 PH        | 32X25          | DISCHARGE IN LPM | 235            | 230 | 225  | 220 | 215 | 210 | 200 | 195 | 190 | 185 | 180 | 170 | 160 | 145 | 130 | 120 | 90 | 85 | 0  |
|   |                  |      |     |             | 6              |                  | 8              | 10  | 12   | 14  | 16  | 18  | 20  | 22  | 24  | 26  | 28  | 30  | -   | -   | -   | -   | -  | -  | -  |
|   | OW1.5040.02.1.01 | 2.0  | 1.5 | 1 PH        | 50X40          |                  | -              | -   | -    | -   | -   | 245 | 220 | 206 | 190 | 176 | 150 | -   | -   | -   | -   | -   | -  | -  | -  |
|   | OW1.5050.02.1.01 | 2.0  | 1.5 | 1 PH        | 50X50          |                  | 420            | 410 | 400  | 380 | 365 | 345 | 325 | 300 | 270 | 245 | 225 | 180 | 120 | -   | -   | -   | -  | -  | -  |
|   | OW1.5050.02.2.11 | 2.0  | 1.5 | P           | 50X50          |                  | -              | -   | -    | -   | -   | 245 | 226 | 208 | 190 | 176 | 150 | -   | -   | -   | -   | -   | -  | -  | -  |
|   | OW1.6550.02.2.12 | 2.0  | 1.5 | P           | 65X50          |                  | -              | -   | -    | -   | 400 | 360 | 276 | 168 | -   | -   | -   | -   | -   | -   | -   | -   | -  | -  | -  |
|   |                  |      |     |             |                |                  | 6              | 10  | 12   | 14  | 16  | 18  | 20  | 22  | 24  | 26  | 28  | 32  | -   | -   | -   | -   | -  | -  | -  |
|   | OW1.5050.03.1.1  | 3.0  | 2.2 | 1 PH        | 50X50          |                  | 660            | 588 | 564  | 504 | 415 | 396 | 360 | -   | -   | -   | -   | -   | -   | -   | -   | -   | -  | -  | -  |
|   | OW1.6550.03.1.01 | 3.0  | 2.2 | 1 PH        | 65X50          |                  | -              | -   | -    | -   | -   | 552 | 528 | 468 | 408 | 360 | 306 | 108 | -   | -   | -   | -   | -  | -  | -  |
|   |                  |      |     |             |                |                  | 7              | 9   | 12   | 14  | 15  | 17  | 18  | 21  | 22  | 24  | 25  | 28  | 30  | 32  | 37  | 38  | 50 | 60 | -  |
|   | OW1.5040.03.3.1  | 3.0  | 2.2 | 3 PH        | 40X40          |                  | -              | -   | -    | -   | -   | 490 | 487 | 450 | 435 | 395 | 360 | 330 | 300 | 290 | 250 | 95  | -  | -  | -  |
|   | OW1.5036.03.3.1  | 3.0  | 2.2 | 3 PH        | 50X50          |                  | -              | -   | -    | -   | 340 | 334 | 330 | 318 | 313 | 295 | 279 | 270 | 261 | 248 | 220 | 95  | 60 | 60 | -  |
|   | OW1.5026.03.3.1  | 3.0  | 2.2 | 3 PH        | 50X50          |                  | -              | -   | -    | 660 | 642 | 600 | 578 | 480 | 435 | 265 | 120 | -   | -   | -   | -   | -   | -  | -  | -  |
|   | OW1.6518.03.3.1  | 3.0  | 2.2 | 3 PH        | 65X65          |                  | 1170           | -   | 1012 | 930 | 885 | 780 | 700 | 520 | 420 | -   | -   | -   | -   | -   | -   | -   | -  | -  | -  |
|   | OW1.6550.03.3.LG | 3.0  | 2.2 | 3 PH        | 65X65          |                  | -              | 640 | 600  | 580 | 560 | 530 | 500 | 430 | 390 | 350 | -   | -   | -   | -   | -   | -   | -  | -  | -  |
|   |                  |      |     |             |                |                  | 15             | 16  | 17   | 18  | 19  | 21  | 22  | 25  | 27  | 28  | 30  | 32  | 37  | 38  | 39  | 41  | 47 | -  | -  |
| * | OW1.5040.03.3.11 | 5.0  | 3.7 | 3 PH        | 40 X 40        |                  | -              | -   | -    | -   | 520 | 517 | 515 | 500 | 485 | 475 | 455 | 435 | 350 | 328 | 300 | 250 | -  | -  | -  |
| * | OW1.6550.03.3.11 | 5.0  | 3.7 | 3 PH        | 50 X 50        |                  | 750            | 735 | 720  | 710 | 690 | 650 | 635 | 575 | 525 | 500 | 410 | 300 | -   | -   | -   | -   | -  | -  | -  |
| * | OW1.5046.05.3.1  | 5.0  | 3.7 | 3 PH        | 50 X 50        |                  | 500            | 495 | 490  | 487 | 480 | 470 | 467 | 452 | 440 | 432 | 420 | 395 | 335 | 320 | 300 | 260 | 60 | -  | -  |

■ Duty Point | \*ISI Certified | \*\*RPM - 1400

# Power to change life



The image displays a variety of KOEL water pumps and related components. The products are arranged on three white cylindrical pedestals against a green background. The top pedestal features three green electric pumps. The middle pedestal shows a black and orange pump, a green pump, a white pressure tank, and a black pump. The bottom pedestal displays a coiled blue cable, a yellow KOEL control box, a blue KOEL control box, and several white pipes. A vertical submersible pump is also visible on the right side of the image.



 **880 633 4433**  
**koel.helpdesk@kirloskar.com**

Authorised Dealer



# MMB Domestic Series

Power to  
change life



# Mini Monoblock



## Specifications:

Power - 0.5 HP – 1.5 HP  
Speed - 2880 RPM  
Voltage - 160 – 240 Volts 50 Hz 1 PH

## Material of Construction (MOC)

- Body - EC Aluminium
- Winding - Copper Wire
- Shaft - EN 8 / SS410
- Impeller - Noryl / HTB
- Casing & Adopter - FG 200

## Salient Features

- High Quality Bearing
- CI Pump Body
- Insulation Class 'F'
- Degree of Protection IP44
- Motor Protection by TOP
- All CI Parts CED Coated



Bungalow



Domestic



Gardening



Building

| MODEL             | MODEL NAME | H.P. | kW   | SUPPLY TYPE | PIPE SIZE (MM) |                  | HEAD IN METERS |      |      |      |      |      |      |      |      |      |      |      |      |      |      |     |     |
|-------------------|------------|------|------|-------------|----------------|------------------|----------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-----|-----|
|                   |            |      |      |             |                |                  | 6              | 9    | 12   | 15   | 18   | 20   | 21   | 24   | 26   | 28   | -    | -    | -    | -    | -    | -   | -   |
| MM1.2525.05.1.11  | PFM        | 0.5  | 0.37 | 1 PH        | 25X25          | DISCHARGE IN LPH | 1800           | 1550 | 1250 | 1050 | 950  | 850  | 600  | 350  | 150  | 0    | -    | -    | -    | -    | -    | -   | -   |
| MM1.2525.05.1.21  | QUARX      | 0.5  | 0.37 | 1 PH        | 25X25          |                  | 1775           | 1525 | 1225 | 1025 | 925  | 825  | 575  | 325  | 125  | 0    | -    | -    | -    | -    | -    | -   | -   |
| MM1.2525.05.1.EL  | MINX       | 0.5  | 0.37 | 1 PH        | 25X25          |                  | 1725           | 1475 | 1175 | 975  | 875  | 775  | 525  | 275  | 100  | -    | -    | -    | -    | -    | -    | -   | -   |
| MM1.2525.05.1.CI  | HDX+       | 0.5  | 0.37 | 1 PH        | 25X25          |                  | 1850           | 1600 | 1300 | 1100 | 1000 | 900  | 650  | 400  | 200  | 0    | -    | -    | -    | -    | -    | -   | -   |
| MM1.2525.05.1.12  | TV1        | 0.5  | 0.37 | 1 PH        | 25X25          |                  | 2000           | 1700 | 1400 | 1200 | 1000 | 800  | 700  | 400  | 0    | -    | -    | -    | -    | -    | -    | -   | -   |
|                   |            |      |      |             |                |                  | 6              | 9    | 12   | 15   | 18   | 21   | 24   | 26   | 28   | 30   | 32   | 36   | 40   | 45   | 50   | 55  | -   |
| MM1.2525.05.1.22  | TV1 HD     | 0.5  | 0.37 | 1 PH        | 25X25          |                  | 2500           | 2300 | 2000 | 1800 | 1600 | 1450 | 1200 | 1050 | 900  | 820  | 400  | 0    | -    | -    | -    | -   | -   |
| MM1.2525.01.01.EC | ECO        | 1.0  | 0.75 | 1 PH        | 25X25          |                  | 2500           | 2200 | 1900 | 1600 | 1300 | 1000 | 700  | 300  | 0    | -    | -    | -    | -    | -    | -    | -   | -   |
| MM1.2525.10.1.12  | XL         | 1.0  | 0.75 | 1 PH        | 25X25          |                  | 3000           | 2700 | 2450 | 2100 | 1850 | 1600 | 1400 | 1200 | 1000 | 820  | 600  | 200  | -    | -    | -    | -   | -   |
| MM1.2525.01.1.21  | XL HD      | 1.0  | 0.75 | 1 PH        | 25X25          |                  | 3200           | 2900 | 2600 | 2300 | 2000 | 1700 | 1500 | 1300 | 1100 | 950  | 800  | 400  | 0    | -    | -    | -   | -   |
| MM1.2525.01.1.20  | Geni       | 1.0  | 0.75 | 1 PH        | 25X25          |                  | 2500           | 2300 | 2150 | 1900 | 1700 | 1550 | 1350 | 1200 | 1000 | 900  | 850  | 650  | 400  | 0    | -    | -   | -   |
| MM1.2525.01.1.EL  | MinQ       | 1.0  | 0.75 | 1 PH        | 25X25          |                  | 2200           | 1900 | 1700 | 1200 | 1200 | 900  | 700  | 500  | 350  | 200  | 0    | -    | -    | -    | -    | -   | -   |
| MM1.2525.01.1.16  | Glacia 56  | 1.0  | 0.75 | 1 PH        | 25X25          |                  | 3400           | 3400 | 3300 | 3300 | 3300 | 3200 | 3100 | 3000 | 2800 | 2620 | 2500 | 2300 | 1500 | 1300 | 1000 | 600 | 600 |
|                   |            |      |      |             |                |                  | 6              | 9    | 12   | 15   | 18   | 21   | 24   | 26   | 28   | 30   | 32   | 36   | 40   | 45   | 50   | 55  | 58  |
| MM1.2525.10.1.13  | XTR        | 1.0  | 0.75 | 1 PH        | 25X25          |                  | 3250           | 3070 | 2850 | 2650 | 2420 | 2200 | 1950 | 1700 | 1400 | 1130 | 810  | 480  | -    | -    | -    | -   | -   |
| MM1.2525.10.1.14  | XCD        | 1.0  | 0.75 | 1 PH        | 25X25          |                  | 3000           | 2810 | 2660 | 2510 | 2380 | 2250 | 2100 | 1960 | 1800 | 1640 | 1470 | 1320 | 1000 | 750  | -    | -   | -   |

# Tecno



## Specifications:

Power Range - 0.5 HP  
Speed - 2880 RPM  
Voltage Range - 160 – 240 Volts 50 Hz 1 PH

## Material of Construction (MOC)

- Body - Cast Iron
- Winding - Copper
- Shaft - EN 8
- Impeller - HTB
- Casing & Adopter - CI FG 200

## Salient Features

- Easy Handling Design
- Motor Protection by TOP
- Insulation - F Class
- Degree of Protection IP44



Bungalow



Domestic



Gardening



Building

| MODEL             | MODEL NAME | H.P. | kW   | SUPPLY TYPE | PIPE SIZE | DISC. IN LPH | HEAD IN METERS |      |      |      |      |     |     |   |
|-------------------|------------|------|------|-------------|-----------|--------------|----------------|------|------|------|------|-----|-----|---|
|                   |            |      |      |             |           |              | 5              | 12   | 15   | 18   | 24   | 28  | 30  | - |
| MM1.2525.05.01.28 | Tecno      | 0.5  | 0.37 | 1 PH        | 25X25     |              | 3200           | 2550 | 2250 | 1900 | 1200 | 650 | 200 | - |

# V-Max



## Specifications:

Power - 0.5 HP – 1 HP  
Speed - 1440 – 2880 RPM  
Voltage - 160 – 240 Volts 50 Hz 1 PH

## Material of Construction (MOC)

- Body - Cast Iron / EC Aluminium
- Winding - Copper Wire
- Shaft - EN8
- Impeller - HTB
- Casing & Adopter - FG 200

## Salient Features

- High Quality Bearing
- CI Pump Body
- Insulation Class 'F'
- Degree of Protection IP44
- Motor Protection by TOP
- All CI Parts CED Coated
- High Head Capacity up to 50 mtrs.



Bungalow



Domestic



Gardening



Building

| MODEL                | MODEL NAME | H.P. | kW   | SUPPLY TYPE | PIPE SIZE (MM) | DISCHARGE IN LPH | HEAD IN METERS |      |      |      |      |      |      |      |      |      |      |      |   |   |
|----------------------|------------|------|------|-------------|----------------|------------------|----------------|------|------|------|------|------|------|------|------|------|------|------|---|---|
|                      |            |      |      |             |                |                  | 3              | 6    | 9    | 12   | 15   | 18   | 21   | 24   | 27   | 30   | 33   | 36   | - | - |
| VM1.2525.05.01.12    | V-MAX 1    | 0.5  | 0.37 | 1 PH        | 25 x 25        |                  | -              | 2600 | 2400 | 2200 | 2100 | 1900 | 1700 | 1400 | 1000 | 800  | 400  | -    | - | - |
| ** VM1.2525.05.01.11 | V-MAX 2    | 0.5  | 0.37 | 1 PH        | 25 x 25        |                  | 3020           | 2850 | 2650 | 2400 | 2150 | 1900 | 1610 | 1300 | 950  | 550  | -    | -    | - | - |
| ** VM1.2525.05.01.13 | V-MAX 3    | 0.5  | 0.37 | 1 PH        | 25 x 25        |                  | 3020           | 2850 | 2650 | 2400 | 2150 | 1900 | 1610 | 1300 | 950  | 550  | -    | -    | - | - |
| VM1.2525.05.01.15    | -          | 0.5  | 0.37 | 1 PH        | 25 x 25        |                  | -              | 2600 | 2400 | 2200 | 2100 | 1900 | 1700 | 1400 | 1000 | 800  | 400  | -    | - | - |
| ** VM1.2525.01.01.11 | -          | 1.0  | 0.75 | 1 PH        | 25 x 25        |                  | 4100           | 3850 | 3600 | 3350 | 3100 | 2820 | 2620 | 2350 | 2120 | 1900 | 1670 | 1450 | - | - |
|                      |            |      |      |             |                |                  | 6              | 9    | 14   | 18   | 22   | 26   | 30   | 34   | 38   | 42   | 46   | 50   | - | - |
| VM1.2525.01.01.CIH   | -          | 1.0  | 0.75 | 1 PH        | 25 x 25        |                  | 3000           | 2850 | 2600 | 2400 | 2200 | 1950 | 1700 | 1480 | 1250 | 1000 | 350  | 140  | - | - |
| VM1.2525.01.01.ALH   | -          | 1.0  | 0.75 | 1 PH        | 25 x 25        |                  | 3000           | 2850 | 2600 | 2400 | 2200 | 1950 | 1700 | 1480 | 1250 | 1000 | 350  | 140  | - | - |

\*\*RPM- 1440

# Rapid Suction



## Specifications:

Power Range - 0.5 HP – 1 HP  
Speed - 2880 RPM  
Voltage Range - 160 – 240 Volts 50 Hz 1 PH

## Material of Construction (MOC)

- Body - Cast Iron
- Winding - Copper Wire
- Shaft - SS410
- Impeller - HTB
- Casing & Adopter - FG 200

## Salient Features

- High Quality Bearing
- Motor Protection by TOP
- All CI Parts CED Coated
- Insulation Class - 'F'
- Degree of Protection - IP44

| MODEL             | MODEL NAME | H.P. | kW   | SUPPLY TYPE | PIPE SIZE (MM) | DISCHARGE IN LPH | HEAD IN METERS |      |      |      |      |      |      |      |      |      |     |     |     |   |
|-------------------|------------|------|------|-------------|----------------|------------------|----------------|------|------|------|------|------|------|------|------|------|-----|-----|-----|---|
|                   |            |      |      |             |                |                  | 3              | 6    | 9    | 12   | 15   | 18   | 22   | 24   | 27   | 30   | 33  | 36  | 39  | - |
| MB1.2525.05.1.72  | RSP-1      | 0.5  | 0.37 | 1 PH        | 25X25          |                  | -              | -    | 1800 | 1440 | 1260 | 19   | -    | -    | -    | -    | -   | -   | -   | - |
| MB1.2525.10.1.66  | RSP-2      | 1.0  | 0.75 | 1 PH        | 25X25          |                  | 2520           | 2340 | 2160 | 1980 | 1860 | 1740 | 1440 | 1380 | 1260 | 1020 | 780 | -   | -   | - |
| MB1.2525.01.01.RS | RSP 9      | 1.0  | 0.75 | 1 PH        | 25X25          |                  | -              | 2640 | 2340 | 2220 | 2100 | 1920 | 1800 | 1620 | 1500 | 1260 | 960 | 840 | 420 | - |

# 10 HD Pump



## Specifications:

Power - 1HP  
Speed - 2880 RPM  
Voltage - 160 – 240 Volts 50 Hz 1 PH

## Material of Construction (MOC)

- Body - Cast Iron
- Winding - Aluminium / Copper
- Shaft - SS410
- Impeller - Cast Iron
- Casing & Adopter - FG 200

## Salient Features

- High Quality Bearing
- Motor Protection by TOP
- Insulation Class - 'F'
- High Head Capacity up to 44 mtrs.
- All CI Parts CED Coated
- Degree of Protection - IP44
- Suction Lift up to 8 mtrs.



Bungalow



Domestic



Gardening



Building

|    | MODEL              | MODEL NAME | H.P. | kW   | SUPPLY TYPE | PIPE SIZE (MM) | DIS. IN LPH | HEAD IN METERS |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |     |     |     |
|----|--------------------|------------|------|------|-------------|----------------|-------------|----------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-----|-----|-----|
|    |                    |            |      |      |             |                |             | 6              | 8    | 10   | 12   | 14   | 16   | 18   | 20   | 22   | 24   | 26   | 28   | 30   | 32   | 34   | 36   | 40  | 42  | 44  |
|    |                    |            |      |      |             |                |             |                |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |     |     |     |
| ** | MB1.2525.01.10.HD  | 10HD       | 1.0  | 0.75 | 1 PH        | 25X25          |             | 3660           | 3420 | 3300 | 3180 | 3060 | 2940 | 2760 | 2580 | 2400 | 2220 | 2040 | 1860 | 1680 | 1500 | 1320 | 1200 | 840 | 660 | 450 |
|    | MB1.2525.01.10.HDM | 10HD       | 1.0  | 0.75 | 1 PH        | 25X25          |             | 3660           | 3420 | 3300 | 3180 | 3060 | 2940 | 2760 | 2580 | 2400 | 2220 | 2040 | 1860 | 1680 | 1500 | 1320 | 1200 | 840 | 660 | 450 |

\*\*RPM- 1440

# TowR Jet Pump



## Specifications:

Power Range - 1HP  
Speed - 2880 RPM  
Voltage Range - 160 – 240 Volts 50 Hz 1 PH

## Material of Construction (MOC)

- Body - EC Aluminium / FG 200
- Winding - Copper Wire
- Shaft - EN 8 / SS410
- Impeller - Noryl
- Casing & Adopter- FG 200

## Salient Features

- High Quality Bearing
- Motor Protection by TOP
- Insulation Class - 'F'
- Degree of Protection - IP44
- Deep Well Suction Capacity
- All CI Parts CED Coated



Shower



Car Wash



Deep Well



Domestic



Water Purifier



Hotel

| MODEL            | MODEL NAME | H.P. | kW   | SUPPLY TYPE | PIPE SIZE (MM) | DIS. IN LPH | HEAD IN METERS |      |      |      |      |      |      |      |      |     |     |     |    |   |   |   |   |   |   |
|------------------|------------|------|------|-------------|----------------|-------------|----------------|------|------|------|------|------|------|------|------|-----|-----|-----|----|---|---|---|---|---|---|
|                  |            |      |      |             |                |             | 6              | 9    | 12   | 15   | 18   | 21   | 24   | 26   | 28   | 32  | 36  | 40  | 45 | - | - | - | - | - | - |
| KCJ.3225.01.1.02 | TOWR       | 1.0  | 0.75 | 1 PH        | 32X25X25       |             | 1656           | 1630 | 1600 | 1570 | 1450 | 1400 | 1300 | 1250 | 1100 | 930 | 700 | 200 | 0  | - | - | - | - | - | - |

# Shallow well



## Specifications:

- Power - 0.5 HP – 1 HP
- Speed - 2880 RPM
- Voltage Range - 160 – 240 Volts 50 Hz 1 PH

## Material of Construction (MOC)

- Body - Cast Iron /Aluminium
- Winding- Copper Wire
- Shaft - SS / EN8
- Impeller - Cast Iron / Noryl
- Casing & Adopter - FG 200

## Salient Features

- Improved Suction Capacity
- High Quality Bearing
- Insulation Class - 'F'
- Mechanical Seal for Extended Pump life
- Degree of Protection - IP44
- Motor Protection by TOP
- All CI Parts CED Coated



Bungalow



Domestic



Gardening



Building

| MODEL              | MODEL NAME   | H.P. | kW   | SUPPLY TYPE | PIPE SIZE (MM) |                  | HEAD IN METERS |      |      |      |      |      |      |      |      |      |     |     |   |
|--------------------|--------------|------|------|-------------|----------------|------------------|----------------|------|------|------|------|------|------|------|------|------|-----|-----|---|
|                    |              |      |      |             |                |                  | 9              | 12   | 15   | 18   | 21   | 24   | 27   | 30   | 33   | 36   | 38  | 42  | - |
| MS1.2525.05.1.30   | ALTITUDE 0.5 | 0.5  | 0.37 | 1 PH        | 25X25          | DISCHARGE IN LPH | 2850           | 2850 | 2800 | 2550 | 2200 | 1750 | 1250 | 750  | 350  | -    | -   | -   | - |
| MS1.2525.01.1.30   | ALTITUDE 1   | 1.0  | 0.75 | 1 PH        | 25X25          |                  | -              | -    | -    | -    | 2950 | 2900 | 2730 | 2210 | 1800 | 1300 | 900 | 500 | - |
| MS1.2525.05.1.16   | -            | 0.5  | 0.37 | 1 PH        | 25X25          |                  | 6              | 9    | 12   | 15   | 18   | 21   | 24   | 26   | 28   | 32   | 36  | 40  | - |
| MS1.2525.10.1.16   | -            | 1.0  | 0.75 | 1 PH        | 25X25          |                  | 3100           | 2900 | 2500 | 2300 | 2000 | 1800 | 1500 | 1200 | 700  | 0    | 0   | -   | - |
| MS1.2525.01.01.8E  | KOEL 80 XM   | 1.0  | 0.75 | 1 PH        | 25X25          |                  | 3400           | 3100 | 3000 | 2900 | 2900 | 2600 | 2400 | 1800 | 1500 | 1200 | 600 | 0   | 0 |
| MS1.2525.05.1.16M  | -            | 0.5  | 0.37 | 1 PH        | 25X25          |                  | 3100           | 2900 | 2500 | 2300 | 2000 | 1800 | 1500 | 1200 | 700  | 0    | 0   | -   | - |
| MS1.2525.10.1.16M  | -            | 1.0  | 0.75 | 1 PH        | 25X25          |                  | 3400           | 3100 | 3000 | 2900 | 2900 | 2600 | 2400 | 1800 | 1500 | 1200 | 600 | 0   | - |
| MS1.2525.05.01.FFM | -            | 0.5  | 0.37 | 1 PH        | 25X25          |                  | 3100           | 2900 | 2500 | 2300 | 2000 | 1800 | 1500 | 1200 | 700  | 0    | 0   | -   | - |
| MS1.2525.10.01.FFM | -            | 1.0  | 0.75 | 1 PH        | 25X25          |                  | 3400           | 3100 | 3000 | 2900 | 2900 | 2600 | 2400 | 1800 | 1500 | 1200 | 600 | 0   | - |

# Booster Pump



## Specifications:

- Power - 0.5 HP – 1 HP
- Speed - 2880 RPM
- Voltage - 160 – 240 Volts 50 Hz 1 PH

## Material of Construction (MOC)

- Body - EC Aluminium
- Winding - Copper Wire
- Shaft - SS410 / EN8
- Impeller - SS304
- Casing & Adopter- FG 200

## Salient Features

- High Quality Bearing
- Wide Application Range 06-45 mtrs
- Insulation Class - 'F'
- Degree of Protection - IP44
- Preferred Pump for High Pressure at Low Level
- All CI Parts CED Coated



Shower



Car Wash



Deep Well



Domestic



Water Purifier



Hotel

| MODEL            | MODEL NAME | H.P. | kW   | SUPPLY TYPE | PIPE SIZE (MM) | DISCHARGE IN LPH | HEAD IN METERS |      |      |      |      |      |      |      |      |      |      |      |      |     |
|------------------|------------|------|------|-------------|----------------|------------------|----------------|------|------|------|------|------|------|------|------|------|------|------|------|-----|
|                  |            |      |      |             |                |                  | 6              | 9    | 12   | 15   | 18   | 20   | 21   | 24   | 26   | 28   | 30   | 36   | 40   | 45  |
| MM1.2525.05.1.B1 | PB 05      | 0.5  | 0.37 | 1 PH        | 25X25          |                  | 1850           | 1600 | 1300 | 1100 | 900  | 700  | 650  | 400  | 200  | 0    | -    | -    | -    | -   |
| MM1.2525.10.1.B1 | PB 10      | 1.0  | 0.75 | 1 PH        | 25X25          |                  | 6000           | 6000 | 5800 | 4900 | 4500 | 4100 | 4000 | 2700 | 2500 | 2600 | 2400 | 1800 | 1300 | 800 |
| MM1.2525.10.1.B0 | -          | 1.0  | 0.75 | 1 PH        | 25X25          |                  | 6000           | 6000 | 5800 | 4900 | 4500 | 4100 | 4000 | 2700 | 2500 | 2600 | 2400 | 1800 | 1300 | 800 |

\*\*\*Without Tank & Without Pressure Switch

# Openwell Pump

## Domestic



### Specifications:

Power - 0.5 HP – 1.5 HP  
 Speed - 2880 RPM  
 Voltage Range - 160 -240 Volts 50 Hz 1 PH  
 380 - 415 Volts 50 Hz 3 PH

### Material of Construction (MOC)

- Body - Cast Iron / SS
- Winding - Copper Wire
- Shaft - SS410
- Impeller - Cast Iron / Noryl
- Casing & Adopter - FG 200

### Salient Features

- Cast Iron / Stainless Steel Motor Body
- VPI Treatment Stator & Rotor for Long Life of Pump
- High Quality Carbon + Stainless Steel Thrust Bearings
- Insulation Class - 'B'
- High Grade Noryl / Cast Iron & Dynamically balanced Impeller
- All CI Parts CED Coated
- High Quality Carbon Bush



Building



Farming



Domestic



Agriculture

| MODEL            | H.P. | kW   | SUPPLY TYPE | PIPE SIZE (MM) |  | HEAD IN METERS |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |  |
|------------------|------|------|-------------|----------------|--|----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|--|
|                  |      |      |             |                |  | 8              | 10  | 12  | 14  | 16  | 18  | 20  | 22  | 24  | 26  | 28  | 30  | 32  | -   | -   | -   | -  | -  |  |
| W1.2525.05.01.RS | 0.5  | 0.37 | 1 PH        | 25x25          |  | 150            | 138 | 126 | 112 | 96  | 75  | 42  | -   | -   | -   | -   | -   | -   | -   | -   | -   |    |    |  |
| W1.2125.05.3.25  | 0.5  | 0.37 | 3 PH        | 25X25          |  | 150            | 138 | 126 | 112 | 96  | 75  | 42  | -   | -   | -   | -   | -   | -   | -   | -   | -   |    |    |  |
| W1.2525.01.1.10  | 1.0  | 0.75 | 1 PH        | 25x25          |  | -              | -   | 175 | 169 | 164 | 159 | 152 | 142 | 130 | 111 | 87  | 44  | 18  | -   | -   | -   | -  |    |  |
| W1.2525.01.1.EC  | 1.0  | 0.75 | 1 PH        | 25x25          |  | -              | -   | 158 | 155 | 150 | 137 | 112 | 84  | 48  | 18  | -   | -   | -   | -   | -   | -   | -  |    |  |
| W1.2525.01.10.EC | 1.0  | 0.75 | 1 PH        | 25x25          |  | -              | -   | 158 | 155 | 150 | 137 | 112 | 84  | 48  | 18  | -   | -   | -   | -   | -   | -   | -  |    |  |
| W1.2125.01.3.25  | 1.0  | 0.75 | 3 PH        | 25X25          |  | -              | -   | 176 | 169 | 164 | 159 | 152 | 142 | 130 | 111 | 87  | 44  | 18  | -   | -   | -   | -  |    |  |
|                  |      |      |             |                |  | 6              | 8   | 10  | 12  | 14  | 16  | 18  | 20  | 22  | 24  | 26  | 28  | 30  | 32  | 34  | 36  | 38 | 40 |  |
| W1.3225.15.1.01  | 1.5  | 1.1  | 1 PH        | 32X25          |  | 235            | 230 | 225 | 220 | 215 | 210 | 200 | 195 | 190 | 185 | 180 | 170 | 160 | 145 | 130 | 120 | 90 | 85 |  |

\*ISI Certified

## X-PEL S

## Wastewater Submersible Pumps



### Specifications:

Power - 0.5 HP – 2 HP  
 Speed - 2880 RPM  
 Voltage Range - 160 -240 Volts 50 Hz 1 PH  
 380 - 415 Volts 50 Hz 3 PH

### Material of Construction (MOC)

- Body - Cast Iron / SS
- Winding - Copper Wire
- Shaft - SS410
- Impeller - Cast Iron / SS410
- Casing & Adopter - FG 200

### Salient Features

- All pumps are powered by designed motors to deliver optimal performance capacity to withstand power fluctuation.



Building



Restaurant



Hotel



Commercial

### Performance Chart (Sewage)

| MODEL NAME  | PART NO.          | HP  | kW   | PHASE | VOLTAGE | DELIVERY SIZE | HEAD IN MTR | 3   | 4   | 5   | 6   | 7   | 8   | 9  | 10 |
|-------------|-------------------|-----|------|-------|---------|---------------|-------------|-----|-----|-----|-----|-----|-----|----|----|
| X-PELS051   | ESP.3232.05.01.FS | 0.5 | 0.37 | 1 PH  | 130-240 | 32mm          | Flow in LPM | -   | -   | 95  | 75  | 55  | 30  | 0  | -  |
| MODEL NAME  | PART NO.          | HP  | kW   | PHASE | VOLTAGE | DELIVERY SIZE | HEAD IN MTR | 4   | 6   | 8   | 10  | 12  | 14  | 15 | 18 |
| X-PEL S 101 | ESP.5050.01.01.FS | 1.0 | 0.75 | 1 PH  | 180-240 | 50mm          | Flow in LPM | 330 | 240 | 150 | 80  | 0   | -   | -  | -  |
| X-PEL S 103 | ESP.5050.01.03.00 | 1.0 | 0.75 | 3 PH  | 360-415 | 50mm          |             | 330 | 240 | 150 | 80  | 0   | -   | -  | -  |
| X-PEL S 201 | ESP.5050.02.01.FS | 2.0 | 1.5  | 1 PH  | 180-240 | 50mm          |             | 480 | 420 | 360 | 280 | 190 | 120 | 50 | -  |
| X-PEL S 203 | ESP.5050.02.03.00 | 2.0 | 1.5  | 3 PH  | 360-415 | 50mm          |             | 480 | 420 | 360 | 280 | 190 | 120 | 50 | -  |



### Specifications:

|               |                                                           |
|---------------|-----------------------------------------------------------|
| Power         | - 1 HP – 2 HP                                             |
| Speed         | - 2880 RPM                                                |
| Voltage Range | - 160 -240 Volts 50 Hz 1 PH<br>380 - 415 Volts 50 Hz 3 PH |

### Material of Construction (MOC)

|                           |                              |
|---------------------------|------------------------------|
| Body - Cast Iron / SS     | Winding - Copper Wire        |
| Shaft - SS410             | Impeller - Cast Iron / SS410 |
| Casing & Adopter - FG 200 |                              |

### Salient Features

- All pumps are powered by designed motors to deliver optimal performance capacity to withstand power fluctuation.
- SS Cutter designed yields fine solids for non-clogging operations



Building



Restaurant



Hotel



Commercial

### Performance Chart ( Cutter )

| MODEL NAME | PART NO.          | HP  | KW   | PHASE | VOLTAGE | DELIVERY SIZE | HEAD IN MTR | 4   | 6   | 8   | 10  | 12  | 14  | 16  | 18  | 20 | 22 |
|------------|-------------------|-----|------|-------|---------|---------------|-------------|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| X-PELC 101 | ECP.5050.01.01.FS | 1.0 | 0.75 | 1 PH  | 180-240 | 50mm          | Flow in LPM | 350 | 300 | 250 | 200 | 150 | 100 | 50  | -   | -  | -  |
| X-PELC 103 | ECP.5050.01.03.00 | 1.0 | 0.75 | 3 PH  | 360-415 | 50mm          |             | 350 | 300 | 250 | 200 | 150 | 100 | 50  | -   | -  | -  |
| X-PELC 201 | ECP.5050.02.01.FS | 2.0 | 1.5  | 1 PH  | 180-240 | 50mm          |             | 400 | 350 | 300 | 260 | 220 | 180 | 140 | 100 | 60 | 20 |
| X-PELC 203 | ECP.5050.02.01.FS | 2.0 | 1.5  | 3 PH  | 360-415 | 50mm          |             | 400 | 350 | 300 | 260 | 220 | 180 | 140 | 100 | 60 | 20 |



## FOR V4 OIL & WATER FILLED MOTOR WITH DRY RUN

| KOEL PART NO      | PANEL TYPE | HP  | PHASE | MOTOR TYPE   | RUNNING CAPACITOR- MFD | START CAPACITOR-MFD | MCB | METHOD OF STARTING |
|-------------------|------------|-----|-------|--------------|------------------------|---------------------|-----|--------------------|
| KCP.2101.10.1D.00 | PCB        | 1.0 | 1 PH  | Oil Filled   | 36                     | 40-60               | 10A | DOL                |
| KCP.2115.10.1D.00 | PCB        | 1.5 | 1 PH  | Oil Filled   | 50                     | 40-60               | 16A | DOL                |
| KCP.2115.11.1D.00 | PCB        | 1.5 | 1 PH  | Oil Filled   | 40                     | 40-60               | 16A | DOL                |
| KCP.2102.20.1D.00 | PCB        | 2.0 | 1 PH  | Oil Filled   | 50                     | 40-60               | 20A | DOL                |
| KCP.2102.21.1D.00 | PCB        | 2.0 | 1 PH  | Oil Filled   | 40                     | 40-60               | 20A | DOL                |
| KCP.2103.20.1D.00 | PCB        | 3.0 | 1 PH  | Oil Filled   | 80                     | 150-200             | 20A | DOL                |
| KCP.2105.10.1D.01 | PCB        | 1.0 | 1 PH  | Water Filled | 72                     | 100-120             | 10A | DOL                |
| KCP.2115.16.1D.01 | PCB        | 1.5 | 1 PH  | Water Filled | 72                     | 120-150             | 16A | DOL                |
| KCP.2115.17.1D.01 | PCB        | 1.5 | 1 PH  | Water Filled | 72                     | 100-120             | 16A | DOL                |
| KCP.2102.16.1D.01 | PCB        | 2.0 | 1 PH  | Water Filled | 100                    | 200-250             | 16A | DOL                |
| KCP.2102.17.1D.01 | PCB        | 2.0 | 1 PH  | Water Filled | 72                     | 100-120             | 16A | DOL                |
| KCP.2103.20.1D.01 | PCB        | 3.0 | 1 PH  | Water Filled | 108                    | 150-200             | 20A | DOL                |



| KOEL PART NO     | PANEL TYPE | HP  | PHASE | MOTOR TYPE   | RUNNING CAPACITOR-MFD | RUNNING CAPACITOR | START CAPACITOR- | METHOD OF STARTING |
|------------------|------------|-----|-------|--------------|-----------------------|-------------------|------------------|--------------------|
| KCP.MCBW.01.1.01 | MCB        | 1.0 | 1PH   | Water Filled | 72                    | 100-120           | 10A              | DOL                |



## FOR V4 OIL & WATER FILLED MOTOR WITHOUT DRY RUN

| KOEL PART NO     | PANEL TYPE | HP  | PHASE | MOTOR TYPE   | RUNNING CAPACITOR- MFD | START CAPACITOR-MFD | MCB | METHOD OF STARTING |
|------------------|------------|-----|-------|--------------|------------------------|---------------------|-----|--------------------|
| KCP.2101.10.1.00 | CONTACTOR  | 1.0 | 1PH   | Oil Filled   | 36                     | 40-60               | 10A | DOL                |
| KCP.2115.10.1.00 | CONTACTOR  | 1.5 | 1PH   | Oil Filled   | 50                     | 40-60               | 16A | DOL                |
| KCP.2115.11.1.00 | CONTACTOR  | 1.5 | 1PH   | Oil Filled   | 40                     | 40-60               | 16A | DOL                |
| KCP.2102.20.1.00 | CONTACTOR  | 2.0 | 1PH   | Oil Filled   | 50                     | 40-60               | 20A | DOL                |
| KCP.2102.21.1.00 | CONTACTOR  | 2.0 | 1PH   | Oil Filled   | 40                     | 40-60               | 20A | DOL                |
| KCP.2103.20.1.00 | CONTACTOR  | 3.0 | 1PH   | Oil Filled   | 80                     | 150-200             | 20A | DOL                |
| KCP.2105.10.1.01 | CONTACTOR  | 1.0 | 1PH   | Water Filled | 72                     | 100-120             | 10A | DOL                |
| KCP.2115.16.1.01 | CONTACTOR  | 1.5 | 1PH   | Water Filled | 72                     | 120-150             | 16A | DOL                |
| KCP.2115.17.1.01 | CONTACTOR  | 1.5 | 1PH   | Water Filled | 72                     | 100-120             | 16A | DOL                |
| KCP.2102.16.1.01 | CONTACTOR  | 2.0 | 1PH   | Water Filled | 100                    | 200-250             | 16A | DOL                |
| KCP.2102.17.1.01 | CONTACTOR  | 2.0 | 1PH   | Water Filled | 72                     | 100-120             | 16A | DOL                |
| KCP.2103.20.1.01 | CONTACTOR  | 3.0 | 1PH   | Water Filled | 108                    | 150-200             | 20A | DOL                |