




Dimensions of the outdoor unit and 150L, 200L, 300L & 500L water tank

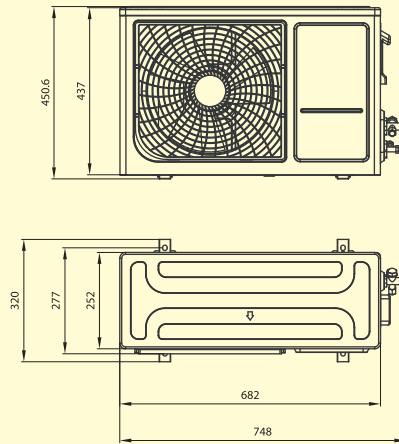


Outdoor unit - 150 L, 200 L & 300 L

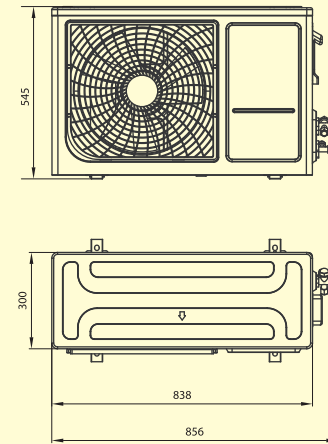


Outdoor unit - 500 L

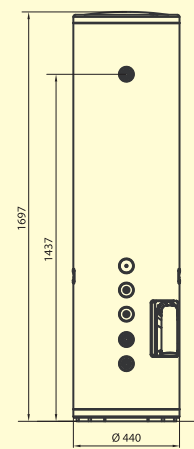


Tank 1 - 150 L

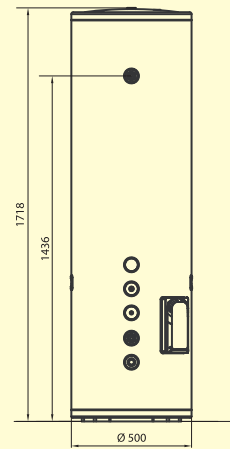

Tank 2 - 200 L

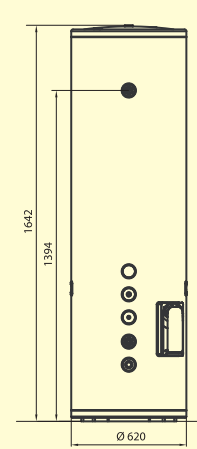

Tank 3 - 300 L

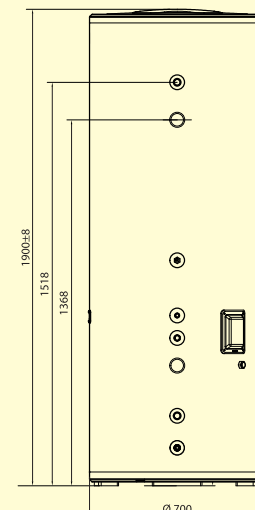

Tank 4 - 500 L

All dimensions are in mm

December 2021

A hug of warmth wrapped in nature.

V-Guard Air Source Heat Pump Water Heaters.



V-Guard Industries Ltd.

Registered Office: 42/962, Vennala High School Road, Vennala, Kochi - 682 028, Kerala.
Ph: 0484-2005000, 4335000 www.vguard.in



V-Guard Care
1800 103 1300 (Toll Free) 1860 180 3000 (Charges Apply)
customer-care@vguard.in @9633503333
www.vguard.in/home/customer-care
CIN: L31200KL1996PLC010010



Air Source Heat Pump Water Heater (ASHPWH)

Running hot water, in recent times has become a necessity more than a luxury. An Air Source Heat Pump Water Heater (ASHPWH) from V-Guard is the go-to solution for readily available hot water. Our ASHPWH’s work even when the outside temperature is way less than zero degrees Celsius. They are energy efficient and save on fuel cost as the heat is absorbed from the atmosphere. Like every other product from V-Guard, the smallest detail has been looked at to make sure that only the best product reaches our valuable customer.

V-Guard Air source heat pump water heaters are usually said to be “fit and forget” units. If you have bought a V-Guard heat pump water heater, rest assured, you have bought arguably the best product in its category with best in class features in safety, efficiency, power saving and environment protection.



Lower operating cost



Environmental friendly refrigerant




Less Maintenance



Silent Operation


Working Principle - Heat Pump Water Heater:

The heat pump makes use of a refrigerant for its operation. The low temperature refrigerant absorbs free heat from the atmospheric air in the evaporator is compressed by a highly efficient electrical compressor to a high- temperature and high-pressure vapour refrigerant. This vapour is then passed through a heat exchanger (condenser) to transfer the heat to the water in the storage tank to produce hot water. The refrigerant then passes through an expansion valve and it goes back to the evaporator for absorbing the free heat from the atmospheric air again and the cycle is repeated.

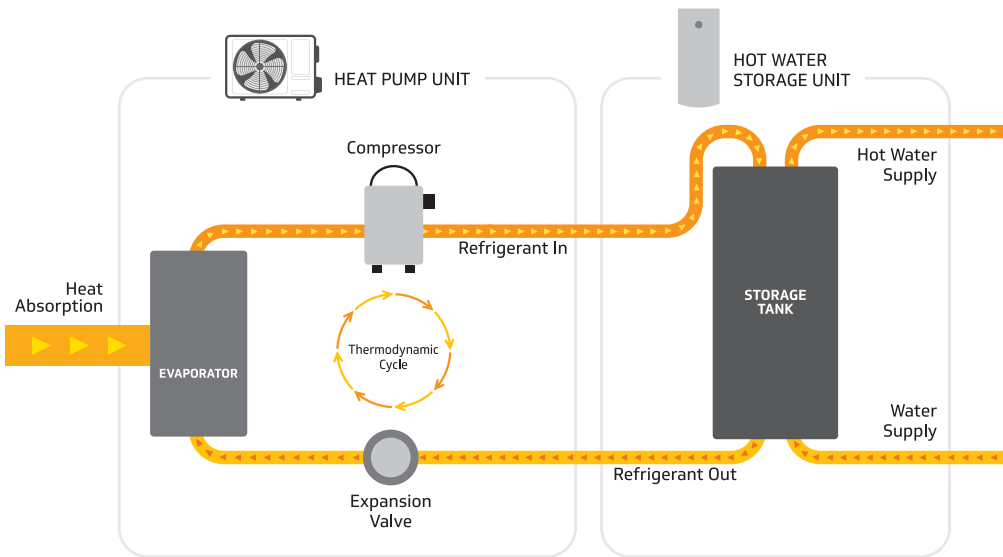

Features


- A new technology Enamel coated inner tank ensures greater corrosion resistance against hard water.
- Environmental friendly refrigerant: our heat pumps only use environment friendly R410A refrigerant.
- V-Guard ASHPWHs provide constant temperature output ranging from 55-60 Degree Celsius.
- V-Guard ASHPWHs come integrated with high pressure protection systems that ensures safety.
- Automatic defrost ensures that maintenance and cleaning intervals do not come too often.
- V-Guard ASHPWHs operates on vast range of temperature variation ranging from -15 to 43 Degree Celsius.
- V-Guard ASHPWHs comes equipped with a water resistant body. They are coated with an anti-corrosive coating that ensures long lasting maintenance free operation.
- Our systems are easy to install and backed by hassle free service.
- Glass lined storage tank to perfectly suit all kinds of water.
- 75% energy saving as compared to electric water heaters.
- An electric backup heater is provided for faster heating, enabling a temperature raise of up to 75 °C.



Warranty



Suitable for All Kinds of Water



Suits for Wide Range of Climatic Variations



Enameled Glass Line Coated Tank

Specifications

Product range:

Model	V-HP 150	V-HP 200	V-HP 300	V-HP 500
Tank volume (L)	160	210	320	500
Heating capacity (W)	3500	3500	3500	5800
Production capacity (LPH)	70	70	70	125
Rated power input (W)	810	810	810	1320
COP	4.32	4.32	4.32	4.38
Backup electric heater(W)	1500	1500	1500	2000
Max power input (W)	2400	2400	2400	3400
Rated current (A)	3.7	3.7	3.7	6
Max current (A)	11	11	11	15.5
Power supply	220~240V/1/50Hz	220~240V/1/50Hz	220~240V/1/50Hz	220~240V/1/50Hz
Waterproof level	IPX4	IPX4	IPX4	IPX4
Refrigerant	R410a	R410a	R410a	R410a
Max water temperature (°C)	60	60	60	60
Heat pump net dimension (mm)	682×252×448	682×252×448	682×252×448	838×300×545
Heat pump net weight (Kg)	25	25	25	36
Noise (db)	≤48	≤48	≤48	≤49
Tank net dimension (mm)	Φ440×1696	Φ500*1716	Φ620*1641	Φ750*1900
Inner tank diameter (mm)	Φ350	Φ410	Φ520	Φ650
Inner Tank Material	Enamel coated Steel with Mg Anode	Enamel coated Steel with Mg Anode	Enamel coated Steel with Mg Anode	Enamel coated Steel with Mg Anode
Water Inlet/outlet size	3/4"	3/4"	3/4"	1"
Insulation thickness(mm)	50	50	50	50
Tank net weight (Kg)	53	60	90	128
Working temperature (°C)	-15~43	-15~43	-15~43	-15~43

Condition: Heating Capacity at Air 20°C /15°C, Water Temperature from 15°C to 55°C

Heating Cost Comparison

Heating Load (Liters)	150 L	200 L	300 L	500 L	Heating Source	Heat Pump Water Heater (Electricity)	Electric Geyser (Electricity)	Boiler (Diesel)	Gas Geyser (LPG)
Heat Pump Water Heater (Electricity)	₹ 12.21	₹ 16.28	₹ 24.42	₹ 40.69	Charges in the state of Kerala	8 Rs Per Unit	8 Rs Per Unit	94 Rs per Litre	39 Rs per Kg
Electric Geyser (Electricity)	₹ 48.84	₹ 65.12	₹ 97.67	₹ 162.79					
Boiler (Diesel)	₹ 68.31	₹ 91.09	₹ 136.6	₹ 227.71					
Gas Geyser (LPG)	₹ 22.89	₹ 30.52	₹ 45.78	₹ 76.31					



HARNESSING NATURE FOR A BETTER TOMORROW



SOLAR WATER HEATER TRU-HOT ZA PRO

BUILT TO LAST IN ALL WATER CONDITIONS



TITANIUM INFUSED
GLASS LINED TANK



SUITABLE FOR ALL
KIND OF WATER



CORROSION
RESISTANT



EASY-TO-CLEAN
TANK



SACRIFICIAL ANODE EXTEND
LIFE OF THE TANK



DURABLE

*Conditions Apply

TRU-HOT ZA PRO SOLAR WATER HEATERS

Step into a world where every shower is a symphony of luxury and environmental responsibility. V-Guard presents to you an ultimate solution to all your hot water needs, Tru-Hot ZA Pro; A superhero that pampers not just you but the planet too! Meticulously crafted using state-of-the-art technology at the V-Guard facility, these solar water heaters work like magic, using the sunlight to warm the water, making every shower a delightful experience.

Tru-Hot ZA Pro is easy to maintain, and its durability guarantees countless indulgent showers. And here's the most exciting part, Tru-Hot ZA Pro isn't just an upgrade; it's a smart investment. You'll save over Rs.10,000* annually while reducing your carbon footprint. With every warm drop, you're contributing to a greener future without sacrificing modern comfort.

DEFYING CORROSION WITH TITANIUM INFUSED GLASS LINED COATING


Glass Lined coating is a reliable technology that allows tanks to function well in both soft and hard water environments which also increases the durability of the tank. Glass Lined coating is applied to the insides of a mild steel (MS) tank, and thus prevents contact of water with mild steel thereby offering better corrosion resistance than any other commercially viable technology currently available. The latest technology are used in the completely automatic, PLC-controlled Glass Lined coating processes. To produce high-quality products, the process is fully managed by an automatic Monorail cardanic type heavy duty conveyor. The material known as vitreous enamel powder is applied to the internal surface of a metal tank and fired at temperature between 800°C and 850°C. The molecular interaction causes the vitreous enamel powder to melt, flow, and finally harden into a smooth, long-lasting glass coating on a metal surface which is called as Glass lining, Glass-lined steel or Glass fused to steel coating.

TECHNICAL SPECIFICATIONS

Capacity	Utility points	Number of persons using hot water	Number of evacuated tube	Backup heater (optional)	Inner tank	Inlet/outlet pipe size of storage tank	Outer tank	Size of the evacuated tubes	Tank insulation	Weight of the tank without water	System height from the roof	Minimum required overhead tank height from the roof	Minimum space area required (NS X EW)	Working max pressure
100 LPD	2	2-3	8	2kW	GL	1.9 cm (3/4)	Zinc Alum	Ø5.8 x 210 cm	PUF	31 kg	1.51 m	1.9 m	2.4 x 1.2 m	0.4 kg/cm ²
150 LPD	3	4-5	12	2kW	GL	1.9 cm (3/4)	Zinc Alum	Ø5.8 x 210 cm	PUF	42 kg	1.51 m	1.9 m	2.4 x 1.6 m	0.4 kg/cm ²
200 LPD	4	5-6	16	2kW	GL	1.9 cm (3/4)	Zinc Alum	Ø5.8 x 210 cm	PUF	55 kg	1.51 m	1.9 m	2.4 x 2 m	0.4 kg/cm ²
250 LPD	4	6-7	20	2kW	GL	1.9 cm (3/4)	Zinc Alum	Ø5.8 x 210 cm	PUF	62 kg	1.51 m	1.9 m	2.4 x 2.3 m	0.4 kg/cm ²
300 LPD	5	8-9	24	2kW	GL	1.9 cm (3/4)	Zinc Alum	Ø5.8 x 210 cm	PUF	73 kg	1.51 m	1.9 m	2.4 x 2.9 m	0.4 kg/cm ²
500 LPD	8	14-15	31	3kW	GL	2.54 cm (1)	Zinc Alum	Ø7 x 210 cm	PUF	112 kg	1.6 m	2 m	2.6 x 3.3 m	0.4 kg/cm ²

SALIENT FEATURES

- Suitable for all water conditions.
- Heavy duty magnesium anode rods extend life of the tank.
- Easy tank cleaning facilitated by the side-opening design.
- Suitable for high-rise buildings.
- Tru-Hot ZA Pro series SWH offers a 10-year warranty*.
- Maximum heat retention with high-density PUF insulation.
- Sturdy construction with powder-coated GI rolled section stand.
- Evacuated tubes with triple-targeted coating for maximum heat absorption.

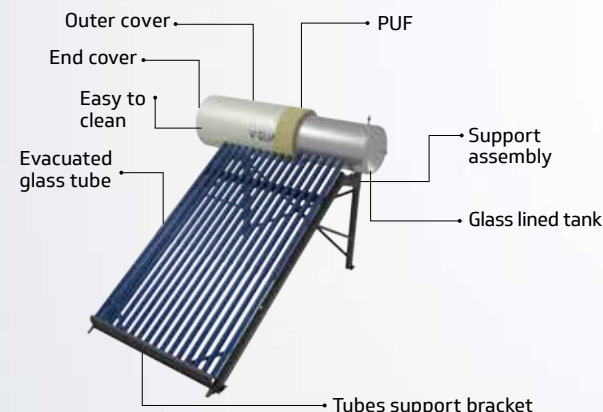

ANNUAL SAVINGS ON ELECTRICITY BILLS (SAMPLE CHART)

Electricity consumed for heating 100 L of water with electric water heater	4.65 electrical unit/day
4.65 X 300(sunshine days)	1395 electrical unit
1395 x 7.5(rate/unit)**	Rs. 10462/-

No. of units saved will depend on the stage.

**Electricity tariff is calculated as per the charges in the state of Kerala, for the consumption of 501-600 units.

Note: Only 300 days of a year have considered. Rest of the days are assumed to be cloudy and overcast.

Due to the continuous development & product improvement, the company reserves the right to change the specification without any prior notice.

*Conditions Apply

V-Guard Industries Ltd. ,

Registered Office: 42/962, Vennala High School Road, Vennala, Kochi - 682 028, Kerala.

Ph: 0484-2005000, 4335000 email: customercare@vguard.in | www.vguard.in



V-Guard Care
0120-4850100
1860 180 3000
customercare@vguard.in
© 9633503333

www.vguard.in/home/customer-care
CIN: L31200KL1996PLC010010



CNM/NOVEMBER/2023