


LX200 GPS · Autostar II Wi-Fi system flow

Virtual handbox + OLED mirror the physical Autostar II workflow

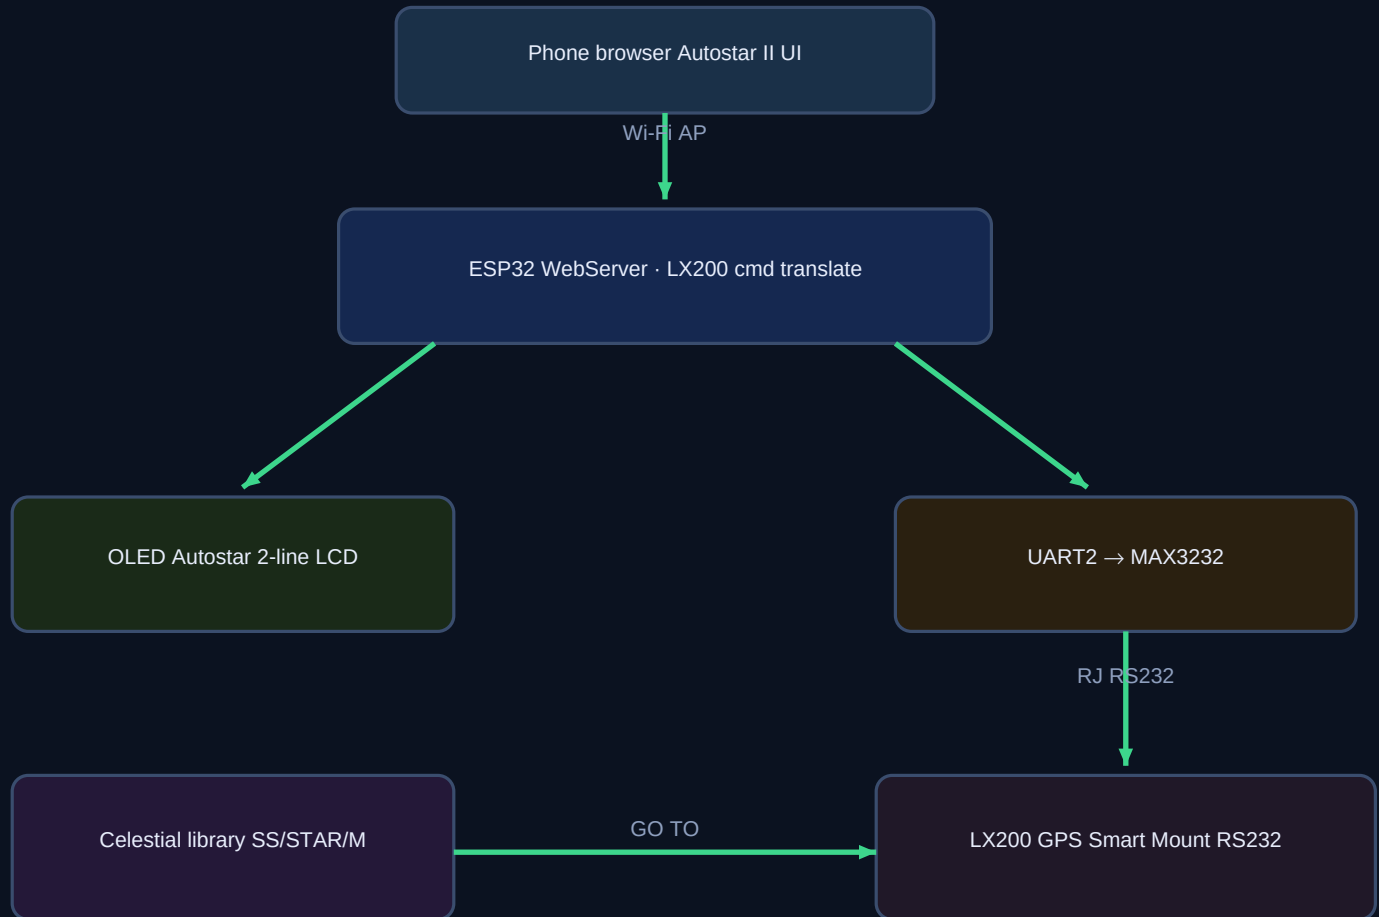

Instant monitor path (Get RA / Get Dec)

1. Tap Get Right Ascension on virtual handbox
2. Browser fetch /execute?cmd=:GR# over Wi-Fi
3. ESP32 writes :GR# on UART → MAX3232 → RS232 jack
4. Mount replies e.g. 05:32:00#
5. ESP32 returns text → green LCD + raw response box update instantly
6. Same string mirrored on physical OLED Autostar-style panel

GO TO + Track (Autostar II)

ENTER loads target · GO TO slews like the handbox



Product match checklist

- ✓ Meade LX200 GPS OTA tube + dual fork (your photos)
- ✓ Base panel: HBX + dual RS232 RJ + Autoguider + Reticle
- ✓ Protocol: Autostar II / LX200 classic ASCII (:cmd#)
- ✓ Virtual UI: ENTER · MODE · GO TO · D-pad · SPEED/CALD/M/FOCUS/SS/STAR/RET/IC/NGC