



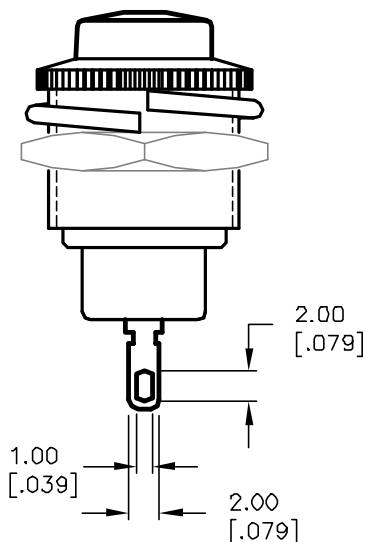


RECOMMENDED PANEL  
MOUNTING



CIRCUIT: 2P; SPST  
CONTACT CONFIGURATION  
OFF (ON)

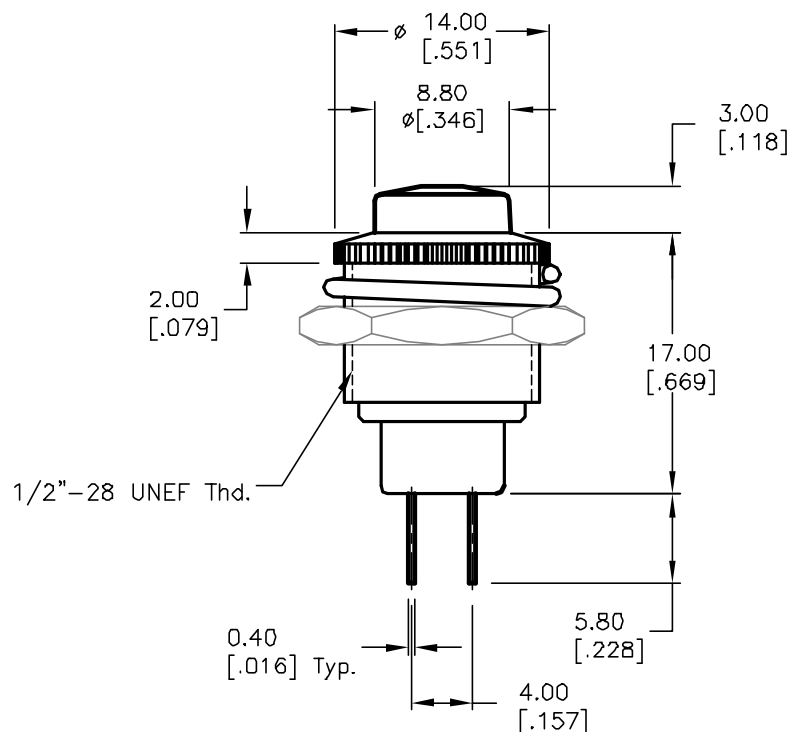

## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3A 125V, 1.5A 250V AC
5. CONTACT RESISTANCE: 50m ohm max.
6. INSULATION RESISTANCE: DC 500V 100M ohm min.
7. DIELECTRIC STRENGTHS: AC 1000V 1 minute
8. ACTUATOR COLOR: BLACK

**E-SWITCH®**

TITLE

RP3502MA-BLK

SCALE

2:1

DATE

2/14/00

DR

MM

DWG

F030015

REV

B

THE INFORMATION CONTAINED IN THIS DOCUMENT  
IS PROPRIETARY TO E-SWITCH AND IS  
NOT TO BE COPIED OR TRANSFERRED

B	12156	REMOVE TABULATION	3/21/02	CC
A	10531	RELEASED FOR PRODUCTION		
REV.	ECN No.	DESCRIPTION	DATE	CHKD