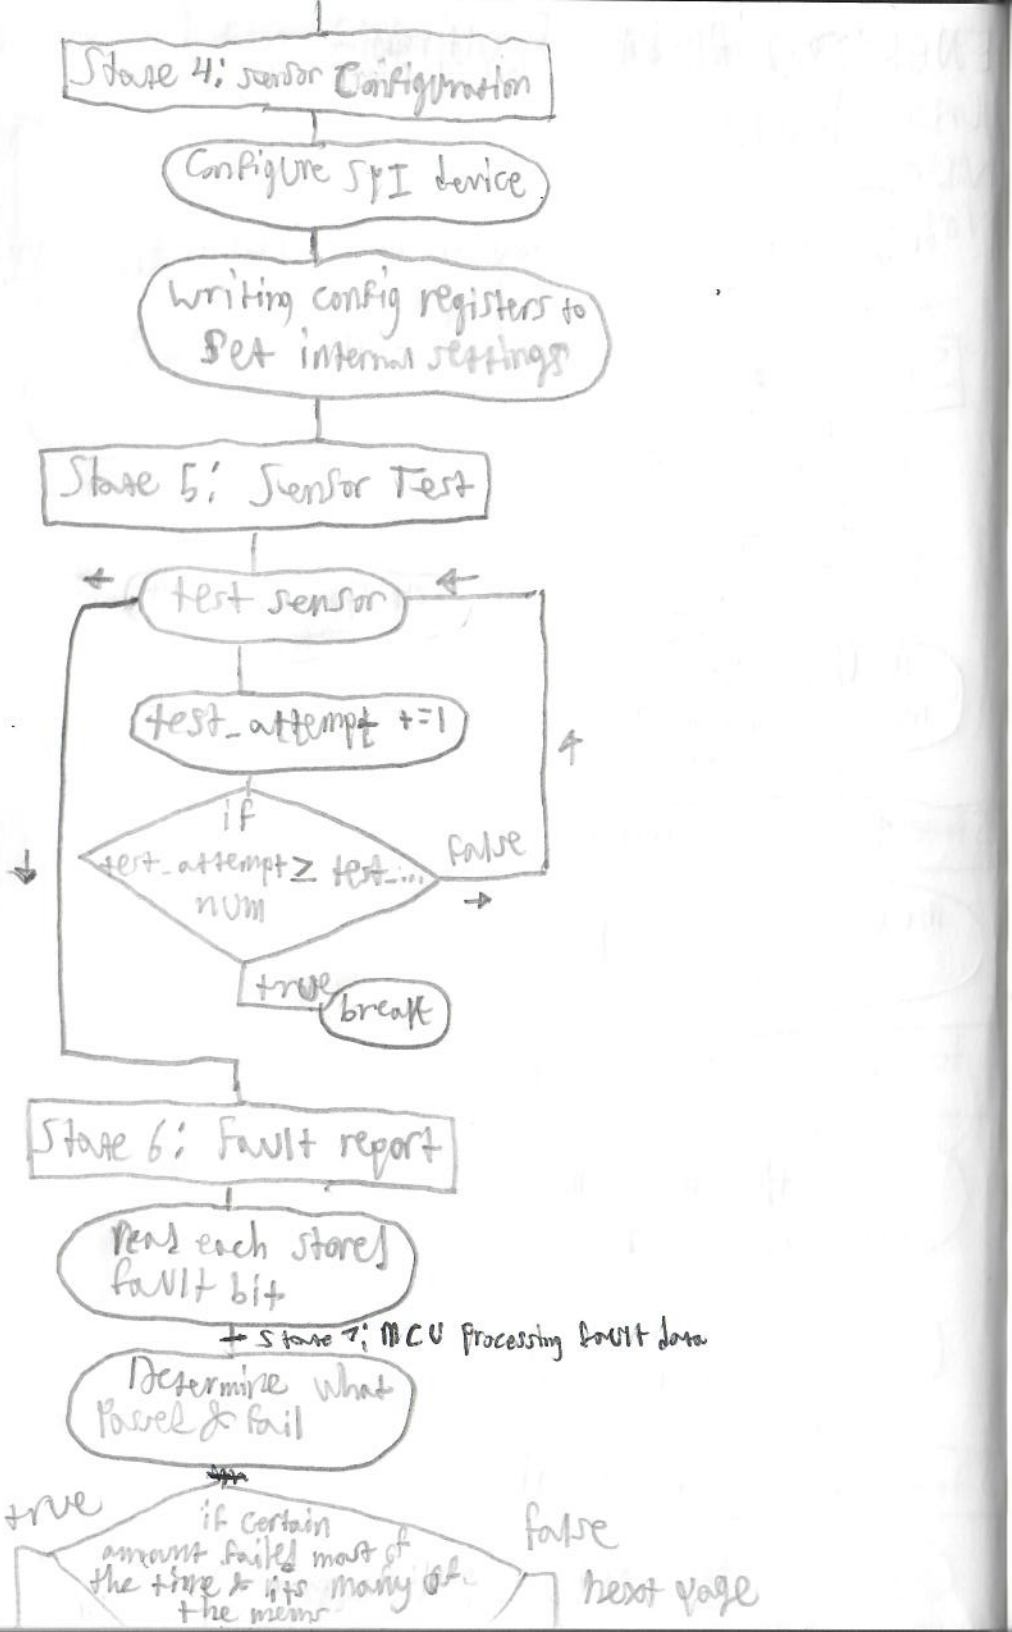
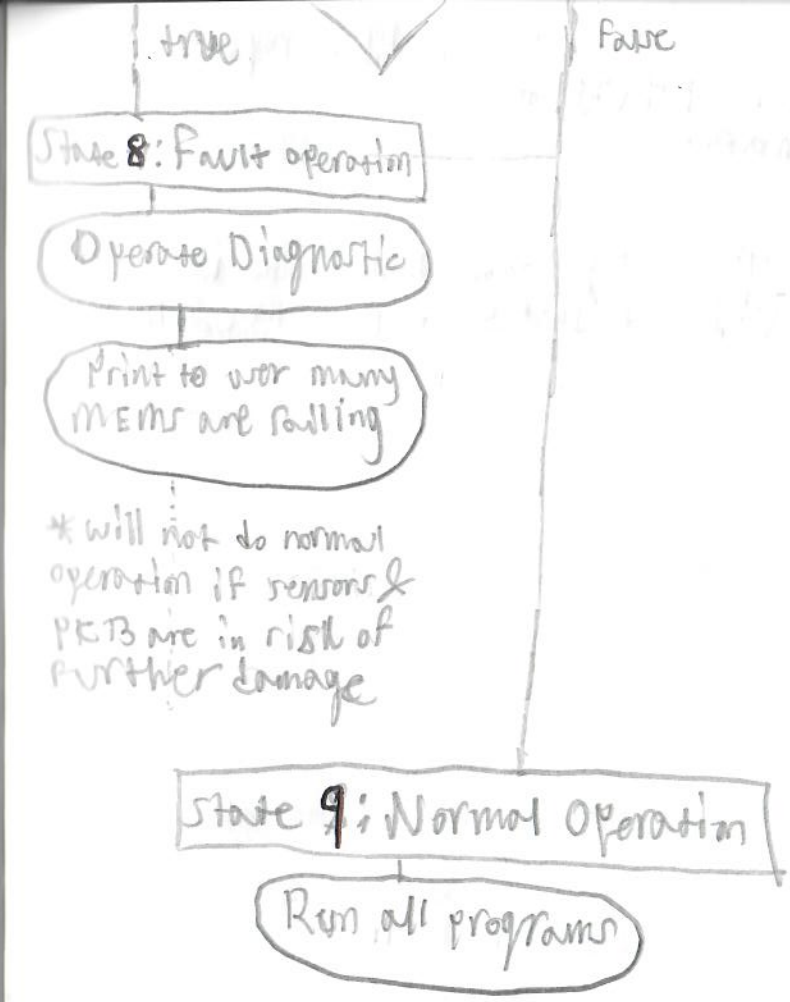

State 4: sensor Configuration
Configure SPI device
Writing config registers to SET internal settings
State 5: Sensor Test
test sensor
test_attempt += 1
if test_attempt ≥ test_... num
false
true
break
State 6: Fault report
Read each stored fault bit
State 7: MCU processing fault data
Determine what Passed & fail
true
if certain amount failed most of the time & it's many of the mems
false
next page


true
false
State 8: Fault operation
Operate Diagnostic
Print to user many MEMS are failing
* will not do normal operation if sensors & PCB are in risk of further damage
State 9: Normal Operation
Run all programs