




I2C pullups




LPS22DF I2C address is 0x5C unless LPSSAO is pulled HIGH, then 0x5D

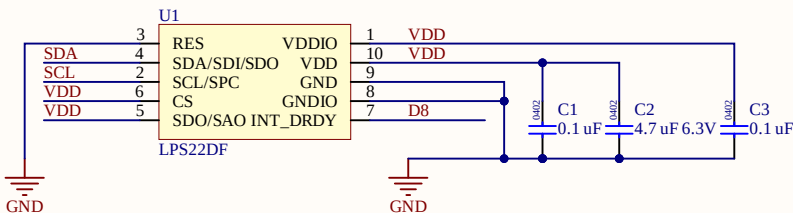


APDS-9253 RGBiR Light Sensor I2C Address 0x52

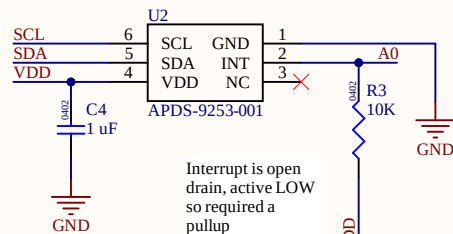


HDC2010YAR RH/T sensor, I2C address 0x40 when ADDR is LOW.

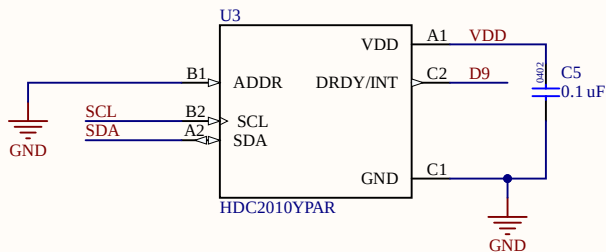

ENS161 eCO2/TVOC sensor

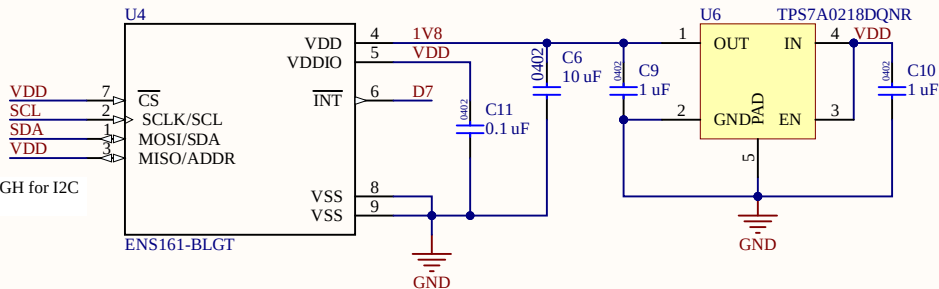



LC709204F LiPo battery fuel gauge, I2C address 0x0B; Fuel gauge powered from battery via pin A4, but needs pull up to CMCU voltage VDD.

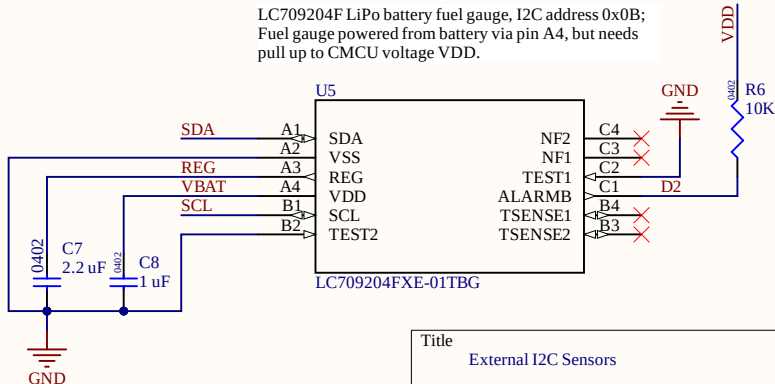

Device	I2C Addr	INT
LPS22DF	0x5D	D8
LC709204	0x0B	D2
ENS161	0x53	D7
HDC2010	0x40	D9
APDS9253	0x52	A0
AEM13921	0x51	D3

Title		
External I2C Sensors		
Size	Number	Revision
A	1	v.01
Date:	9/25/2026	Sheet of 3
File:	ExternalI2C.SchDoc	Drawn By: TLERA Corporation

Filtering capacitors for the daughter board power input (3V0) to reduce noise from the main Sasquatch board

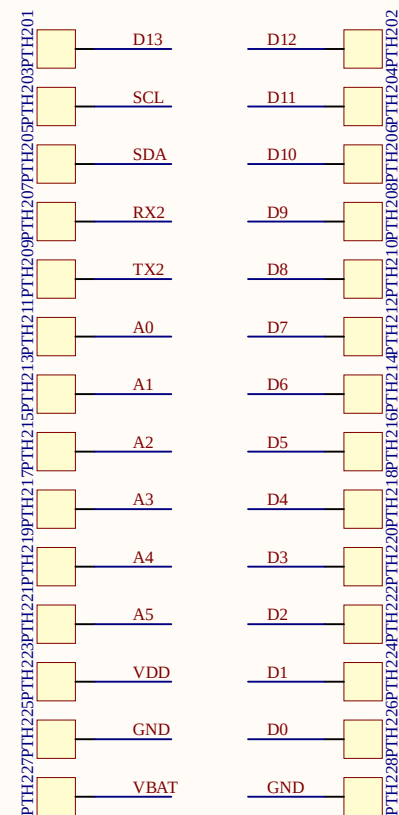

Title Sasquatch Interface			
Size	Number	Revision	
A	3	v.01	
Date:	9/25/2026	Sheet of	3
File:	SasquatchInterface.SchDoc	Drawn By:	TLERA Corporation