


Experiment 5

1. Create a Filter to display only TCP/UDP packets, inspect the packets and provide the flow graph

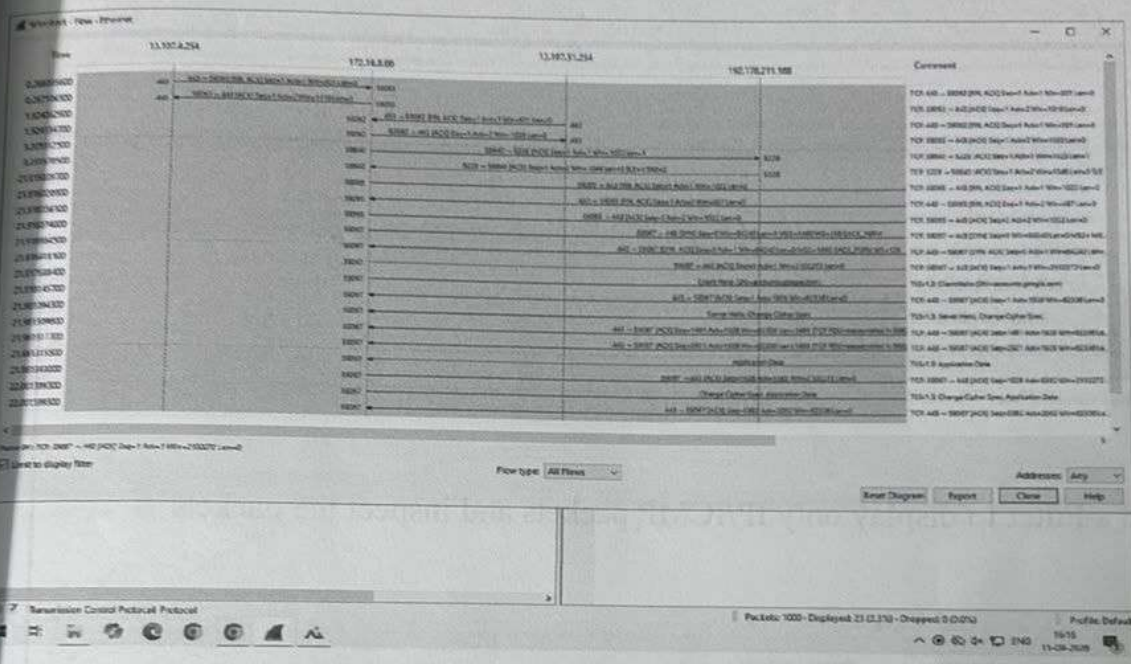


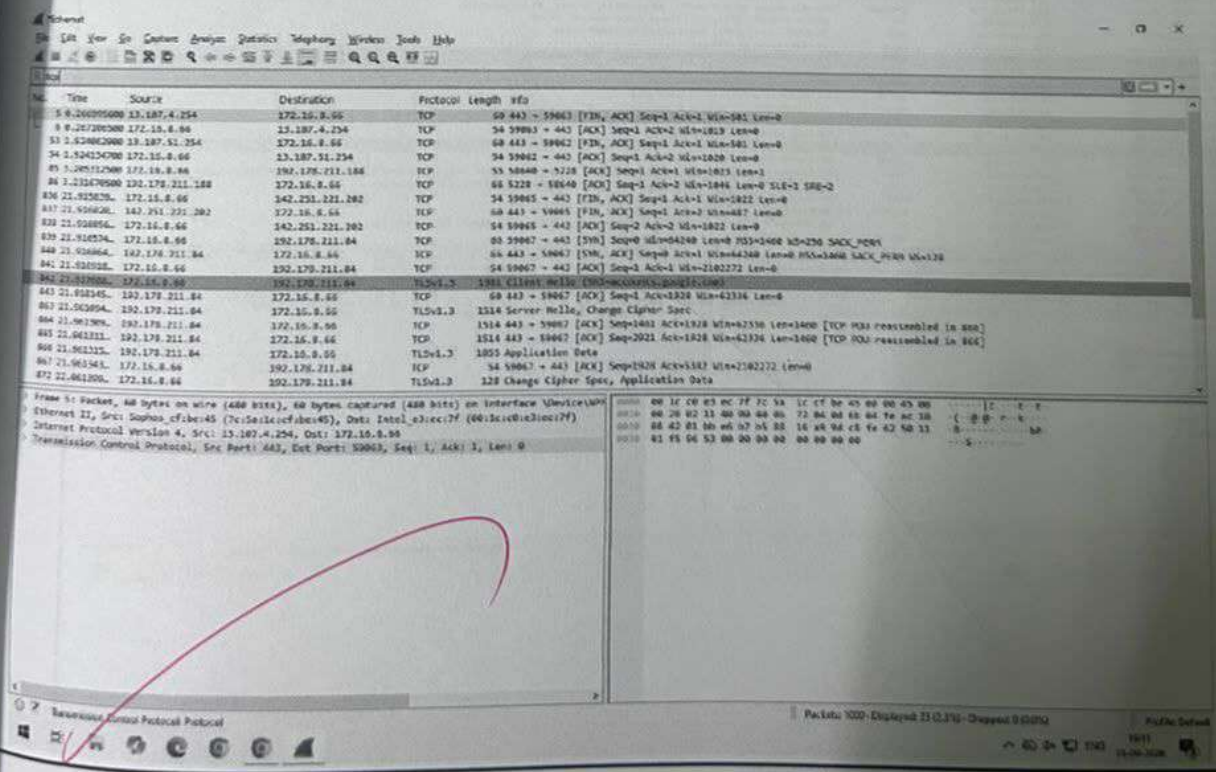

4. Create a Filter to display only HTTP packets and inspect the packets

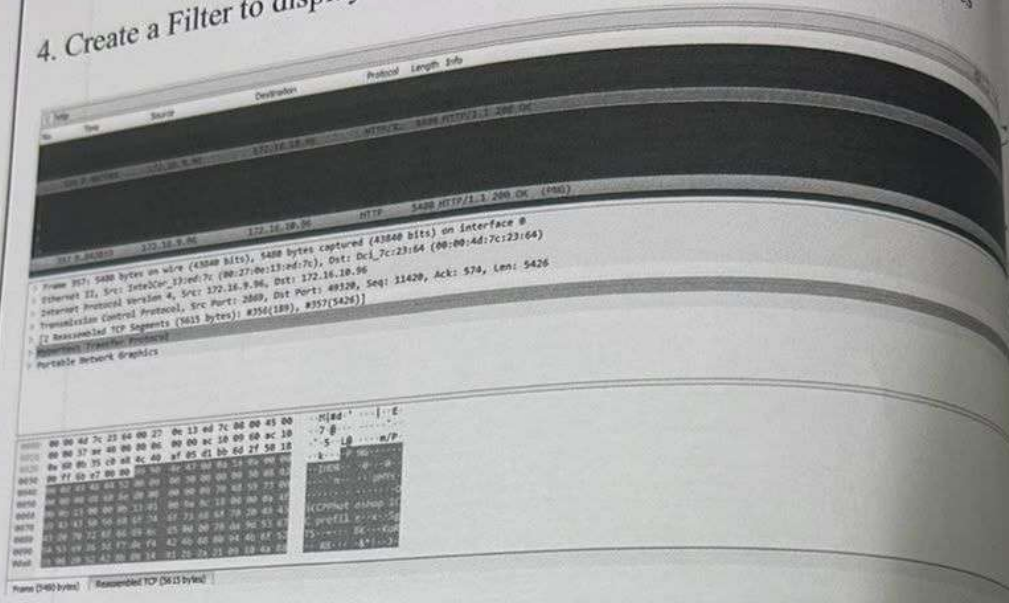


5. Create a Filter to display only IP/ICMP packets and inspect the packets

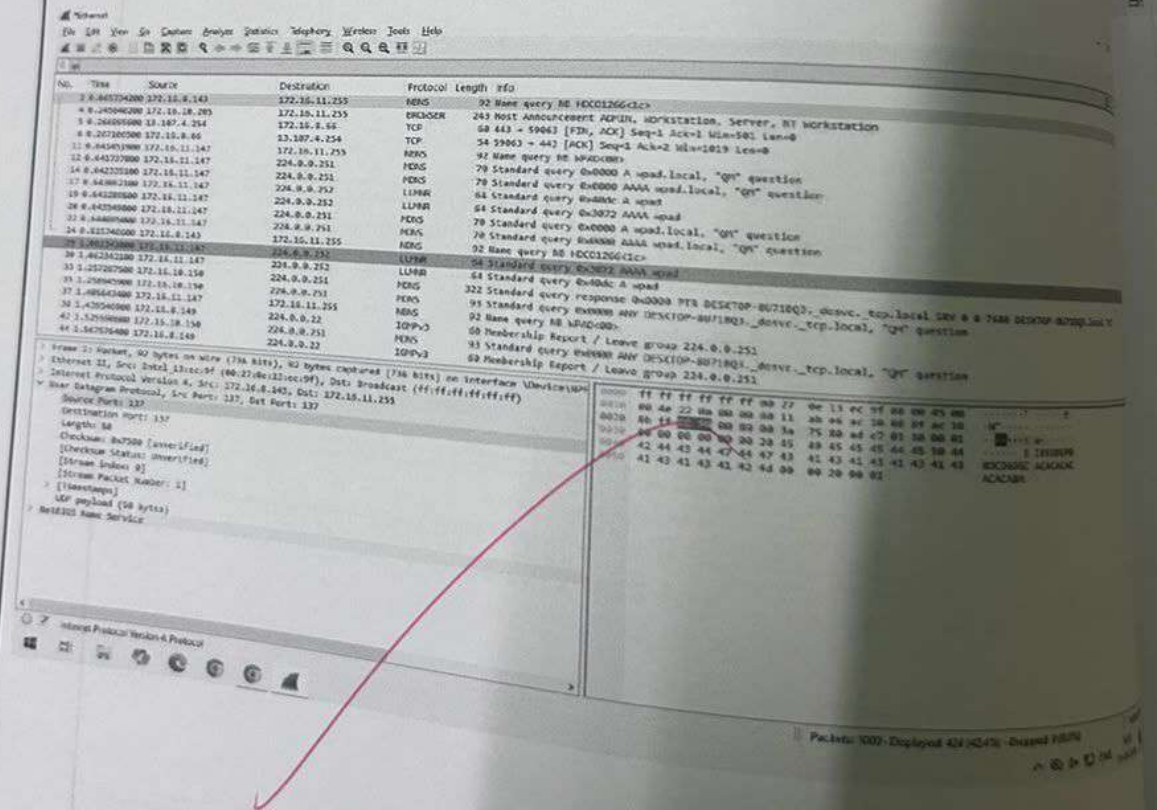


ow graph.


4. Create a Filter to display only HTTP packets and inspect the packets

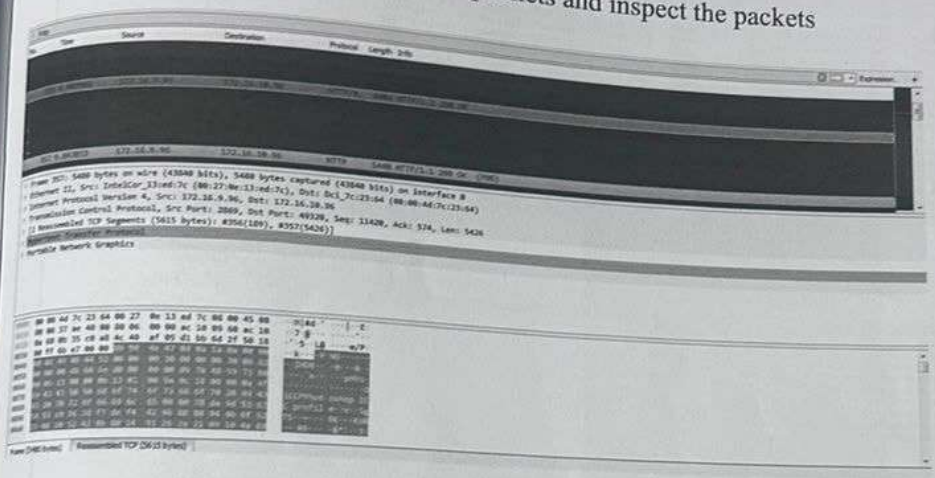


5. Create a Filter to display only IP/ICMP packets and inspect the packets

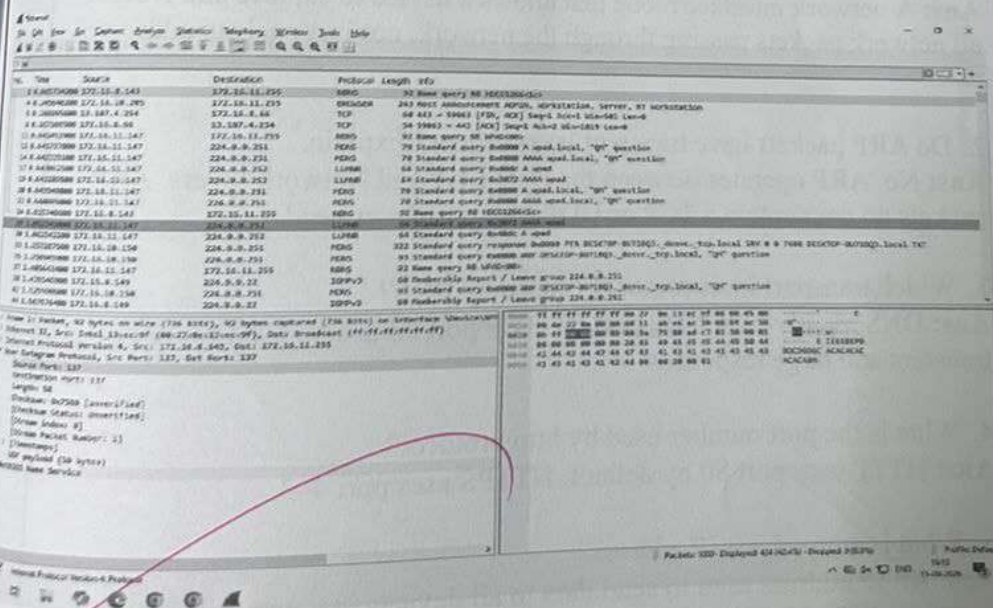


3. Create a Filter to display only DNS packets and provide the flow graph.

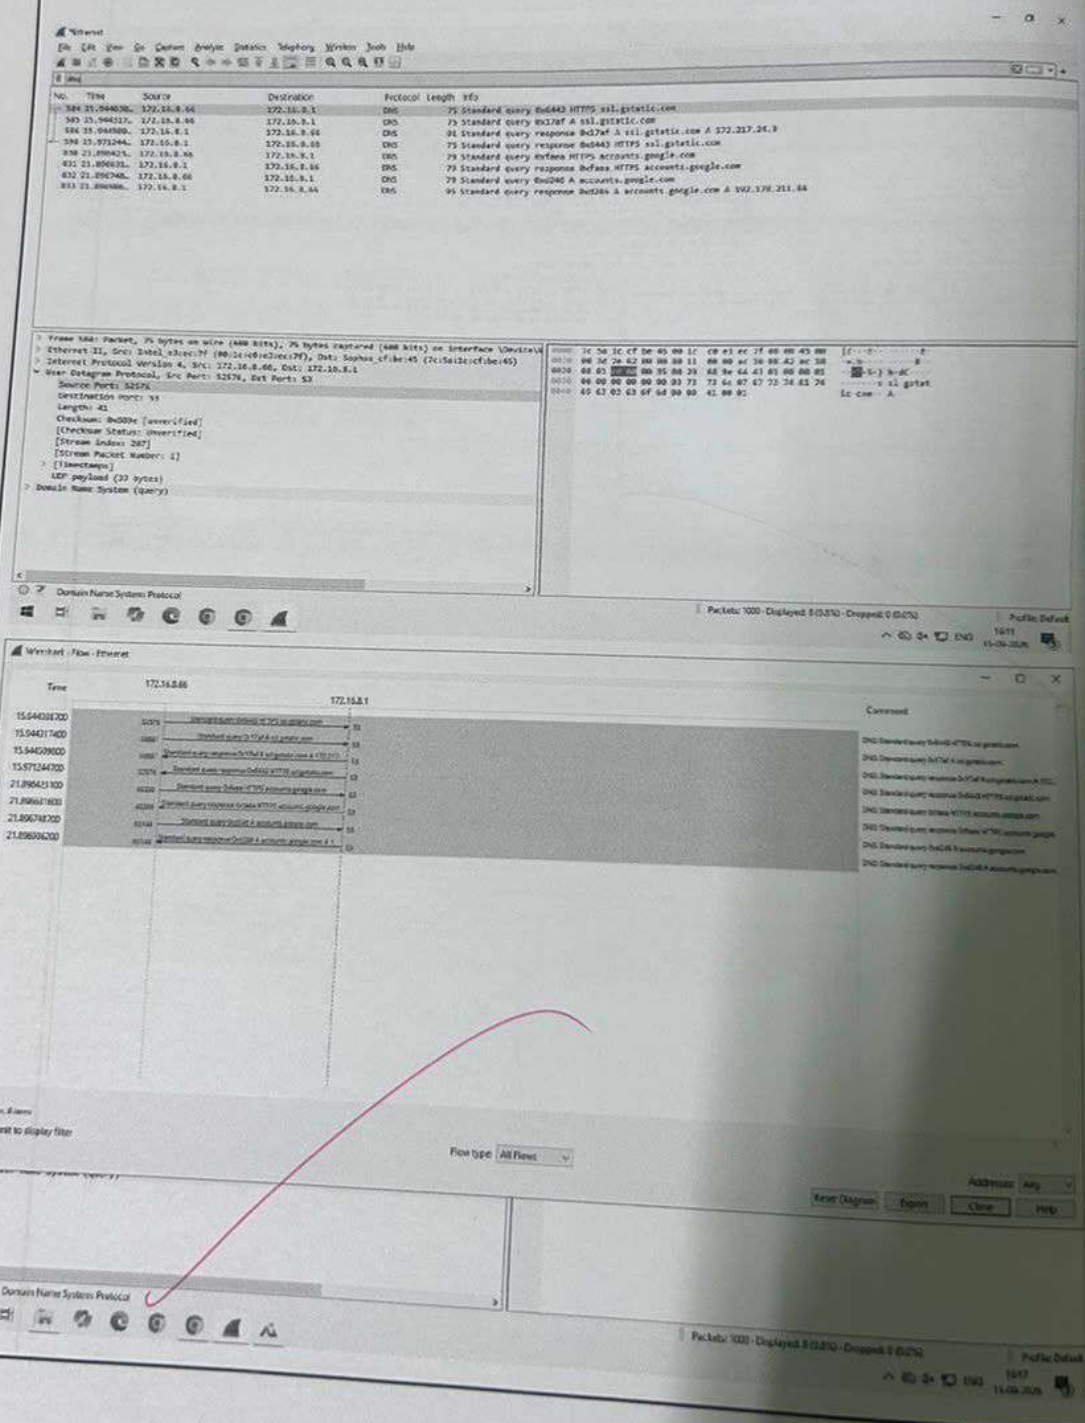


4. Create a Filter to

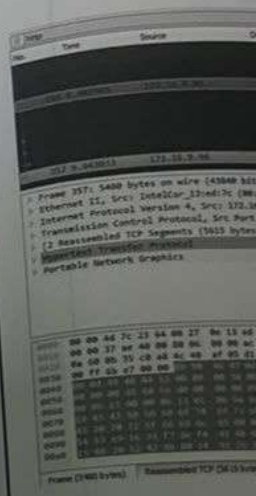


5. Create a Filte

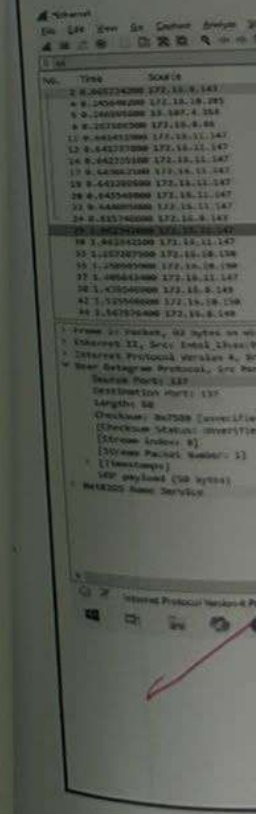

2. Create a Filter to display only ARP packets and inspect the packets.

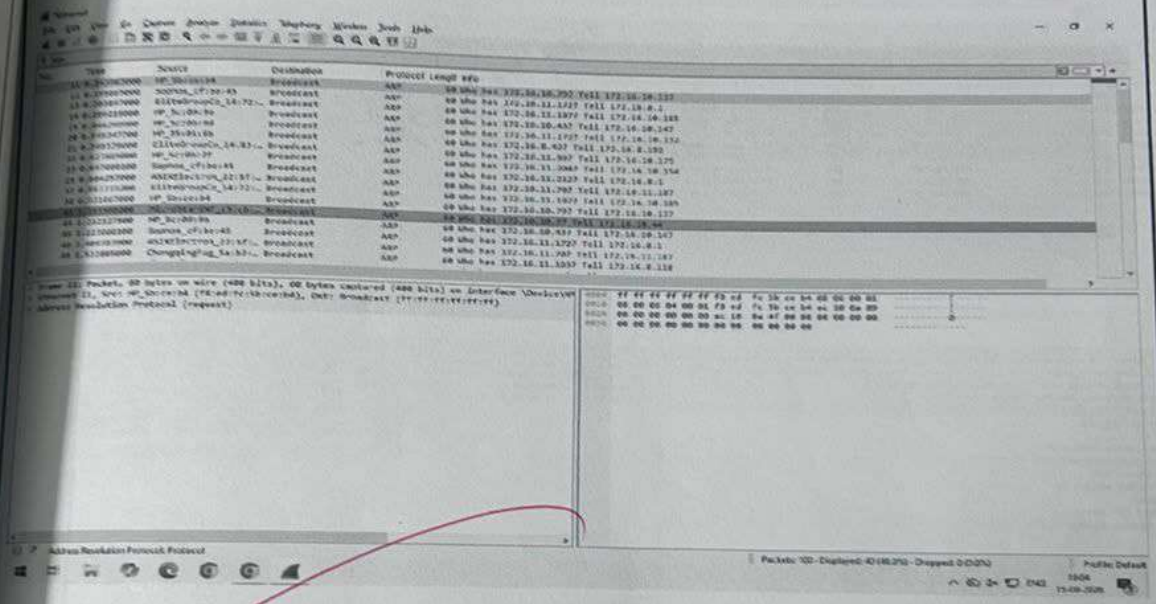

6. Create a Filter to display only DHCP packets and inspect the packets.

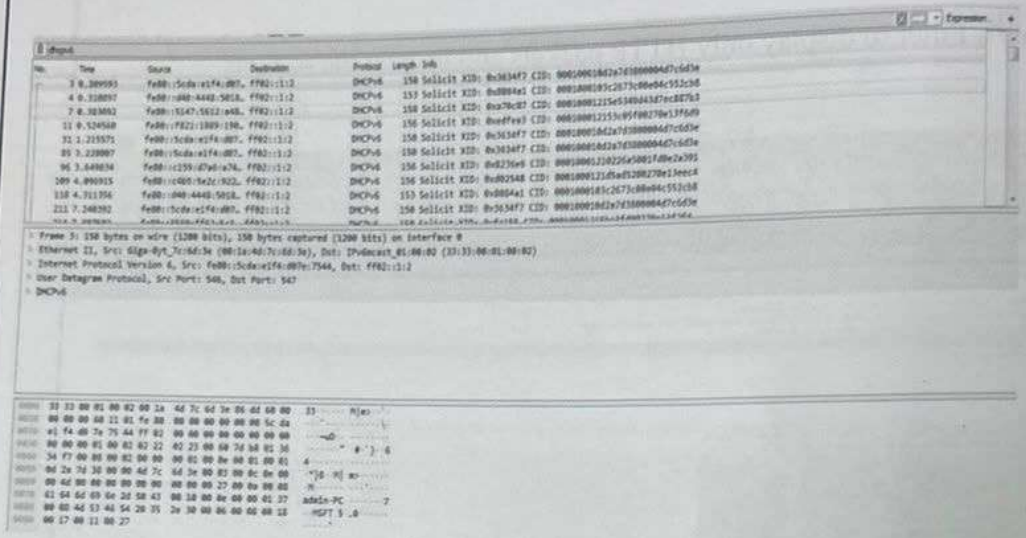

Student Observation:

1. What is promiscuous mode?
Ans: A network interface mode that allows a device to capture and receive all network packets passing through the network, not just packets addressed to it.

2. Do ARP packets have transport layer header? Explain.
Ans: No. ARP operates between the Data Link and Network layers. ARP packets do not contain a TCP or UDP transport-layer header.

3. Which transport layer protocol is used by DNS?
Ans: DNS mainly uses UDP port 53. TCP port 53 is also used for zone transfers and large responses.

4. What is the port number used by http protocol?
Ans: HTTP uses port 80 by default. HTTPS uses port 443.

5. What is a broadcast IP address?
Ans: An IP address used to send data to all devices in a network. For example, 192.168.1.255 is the broadcast address for a 192.168.1.0/24 network.