



สุข | The
ชี | HAPPY
| TOILET
Good Heavens!



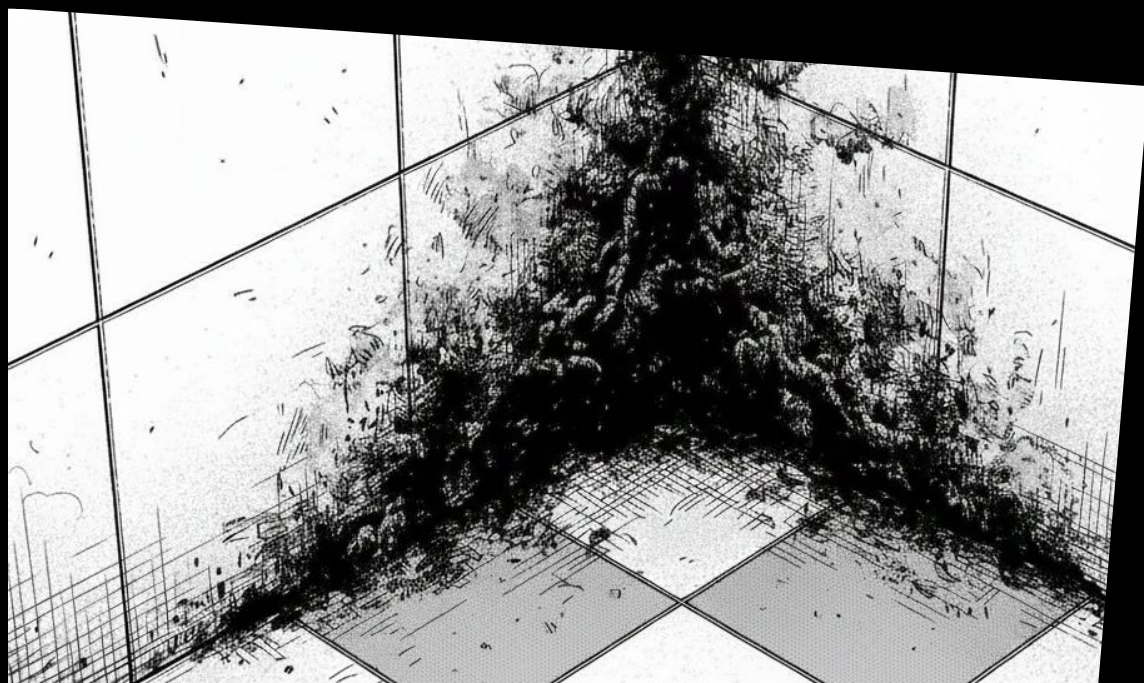

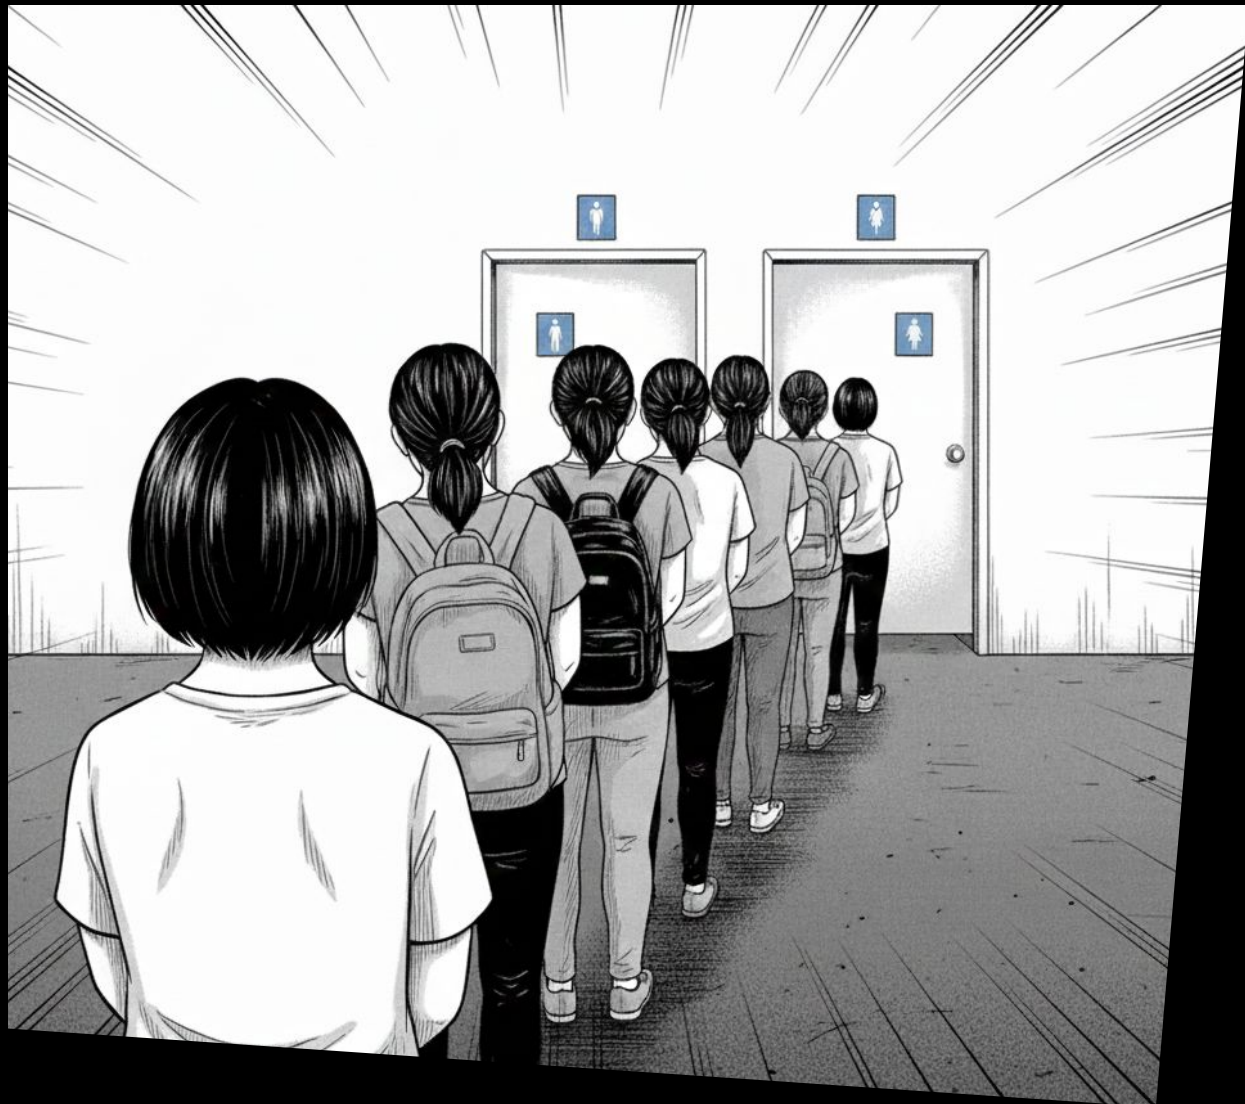

Problems

Insufficient number
Moist+Mold
Latrinalia

Method

Expandable
Well-flow
Easy-care

Design


Modular construction
Improve ventilation
Wipe-clean finishing



CONCEPTUAL DIAGRAM


01

The design process began with an analysis of the project program, which informed the initial massing and overall scale of the building.

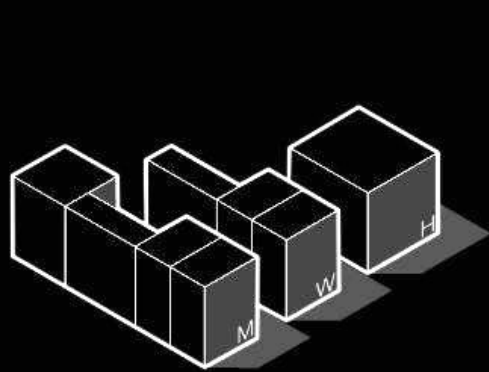


02

Next, the spaces were grouped using a conventional layout to examine the building volume. The mass was then twisted to achieve a more compact, centralized form.

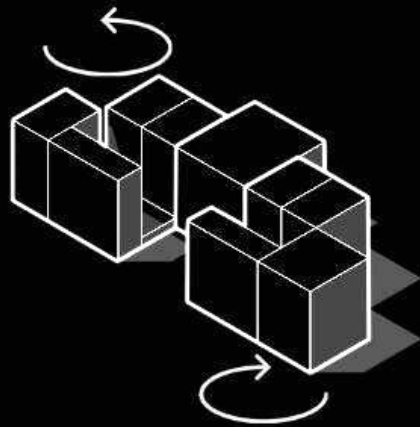


03

The spacing between modules was then increased to create spatial interest while enhancing natural ventilation performance.

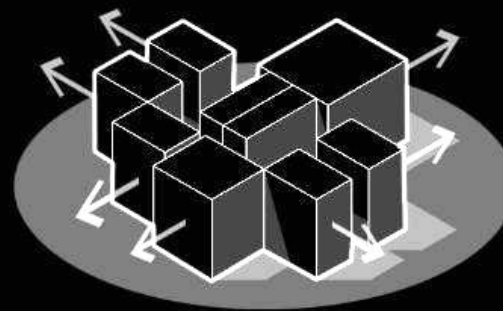


04

The corners of each modular mass were elevated to generate a simple roof geometry.

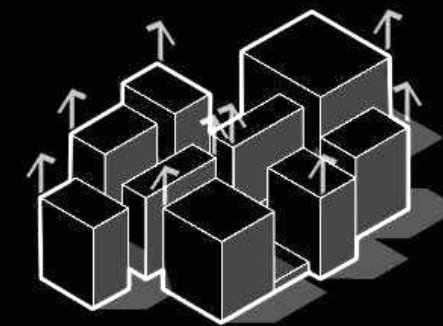

05

The final massing forms a cohesive and dynamic building, designed to accommodate **future modular** additions while **maintaining** the integrity of the **overall form**.

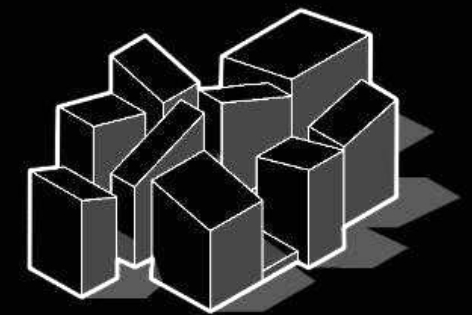


FLOOR PLAN

Approximate Building Size
7800 mm (W)
8700 mm (L)

Approximate Building Area
43.50 sqm

Key plan

- 01 Entrance
- 02 Lavatory module
(1200x1800 mm)
- 03 Water closet module
(1200x1800 mm)
- 04 Urinal module
(900x1800 mm)
- 05 Handicaped WC module
(2400x2700 mm)
- 06 Pump Module
(1500x1800 mm)
- 07 Walk way
(width 1500 mm)

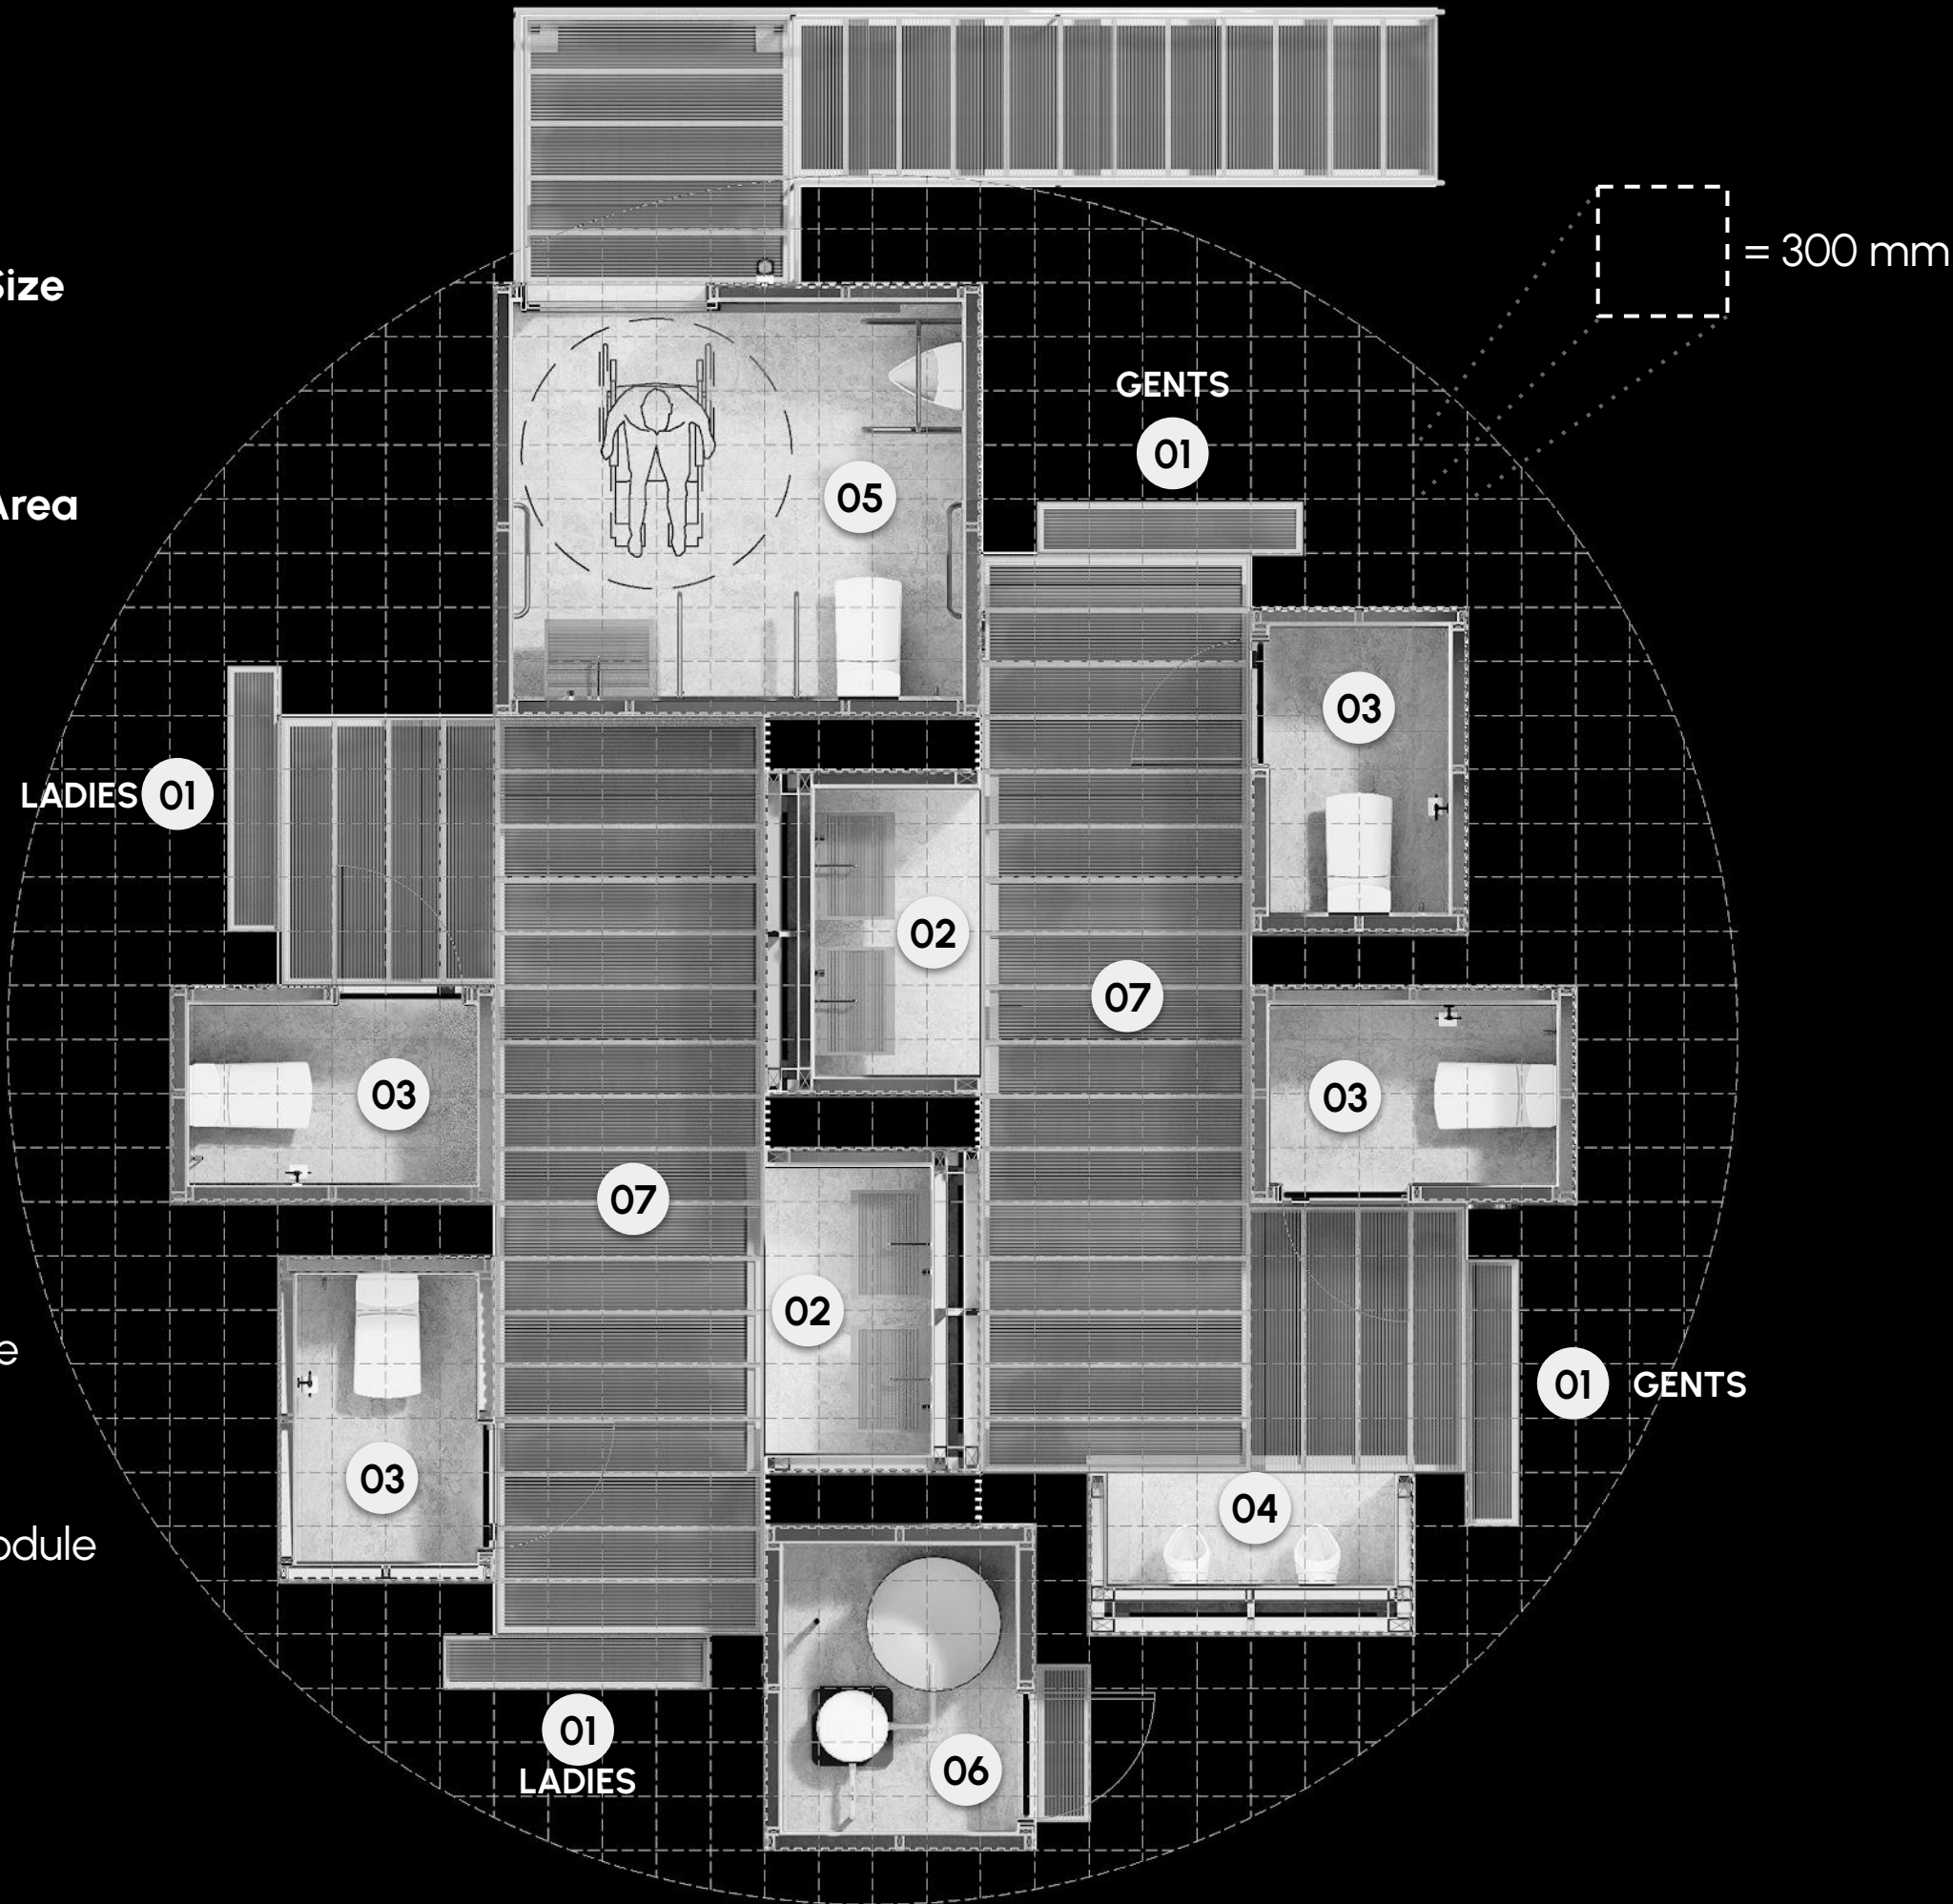


ISOMETRIC



- 01 Entrance
- 02 Lavatory module
(1200x1800 mm)
- 03 Water closet module
(1200x1800 mm)
- 04 Urinal module
(900x1800 mm)
- 05 Handicaped WC module
(2400x2700 mm)
- 06 Pump Module
(1500x1800 mm)
- 07 Walk way
(width 1500 mm)

MATERIALS

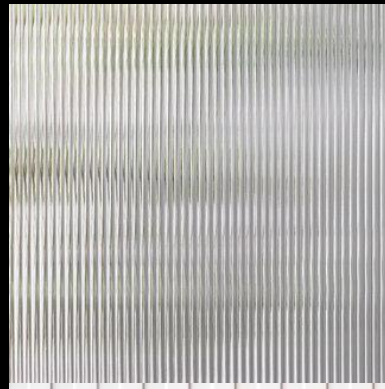


Translucent roof

Polycarbonate sheet/
Raymax roof
(Walk way roof)




Metalsheet

Cloud dancer
RAL 9003
(Exterior wall /
Module Roof)

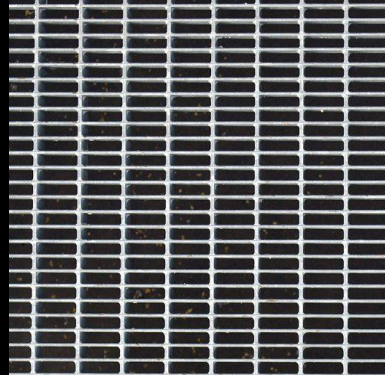


Grating floor

6mm gap
(Walkway / Ramp)

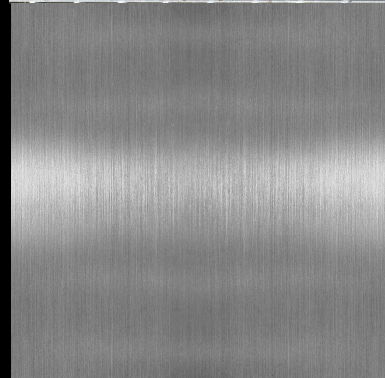

Stainless finishing

(Interior wall / Mirror
Trimming / Door / Lamp)

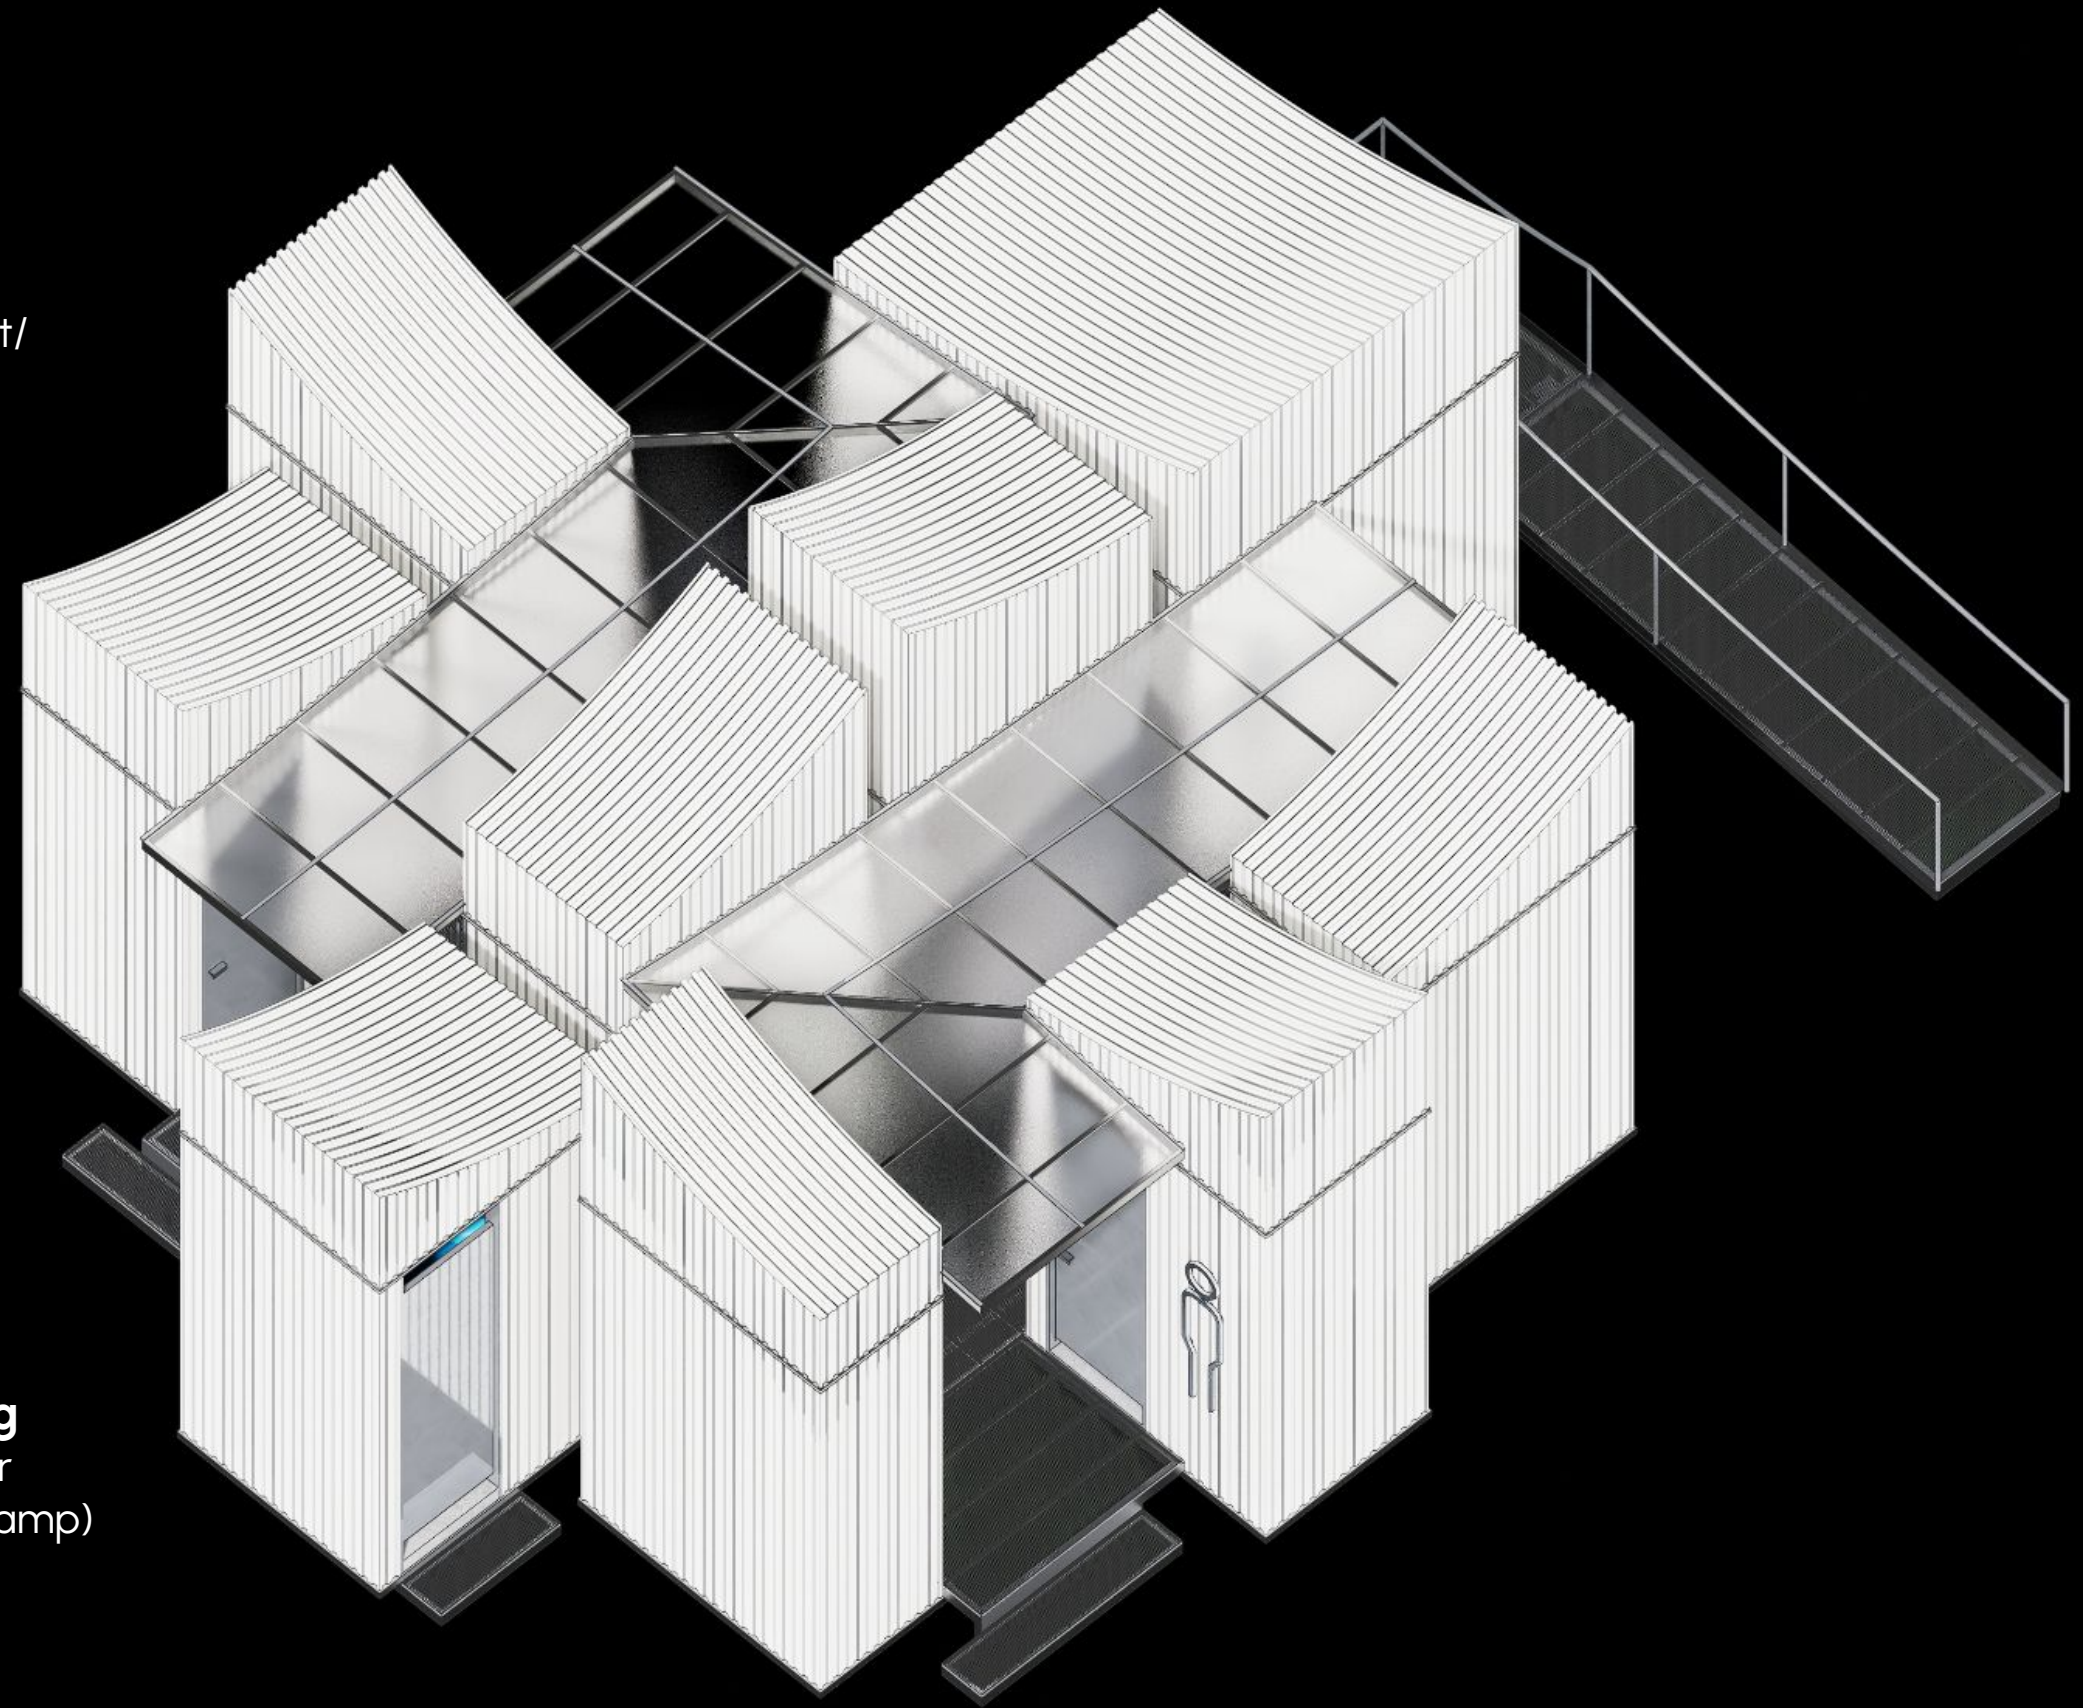

MODULE TYPOLOGY

Custom-sized
stainless steel
mirror LED
lamp,
wall-integrated

Mirror-finish
stainless steel
wall panel

Custom-fabrica
ted stainless
steel lavatory,
fine grating top

Exposed pipe
(easy to
maintenance)

ISOMETRIC
LAVATORY MODULE



Custom-size
d stainless
steel mirror
LED lamp,
door
frame-integr
ated

10 mm thick
gypsum board
or cement
board
installed on
galvanized steel
subframe,
laminated with
faux stainless
steel wall
finishing

ISOMETRIC
WATER CLOSET MODULE




MODULE TYPOLOGY

Custom-sized
stainless steel
mirror LED
lamp,
intel-integrated

Motion sensor
urinal flush
(optional)

20 mm thk
cement board
finished with
granito tile
(R > 10)


ISOMETRIC
URINAL MODULE

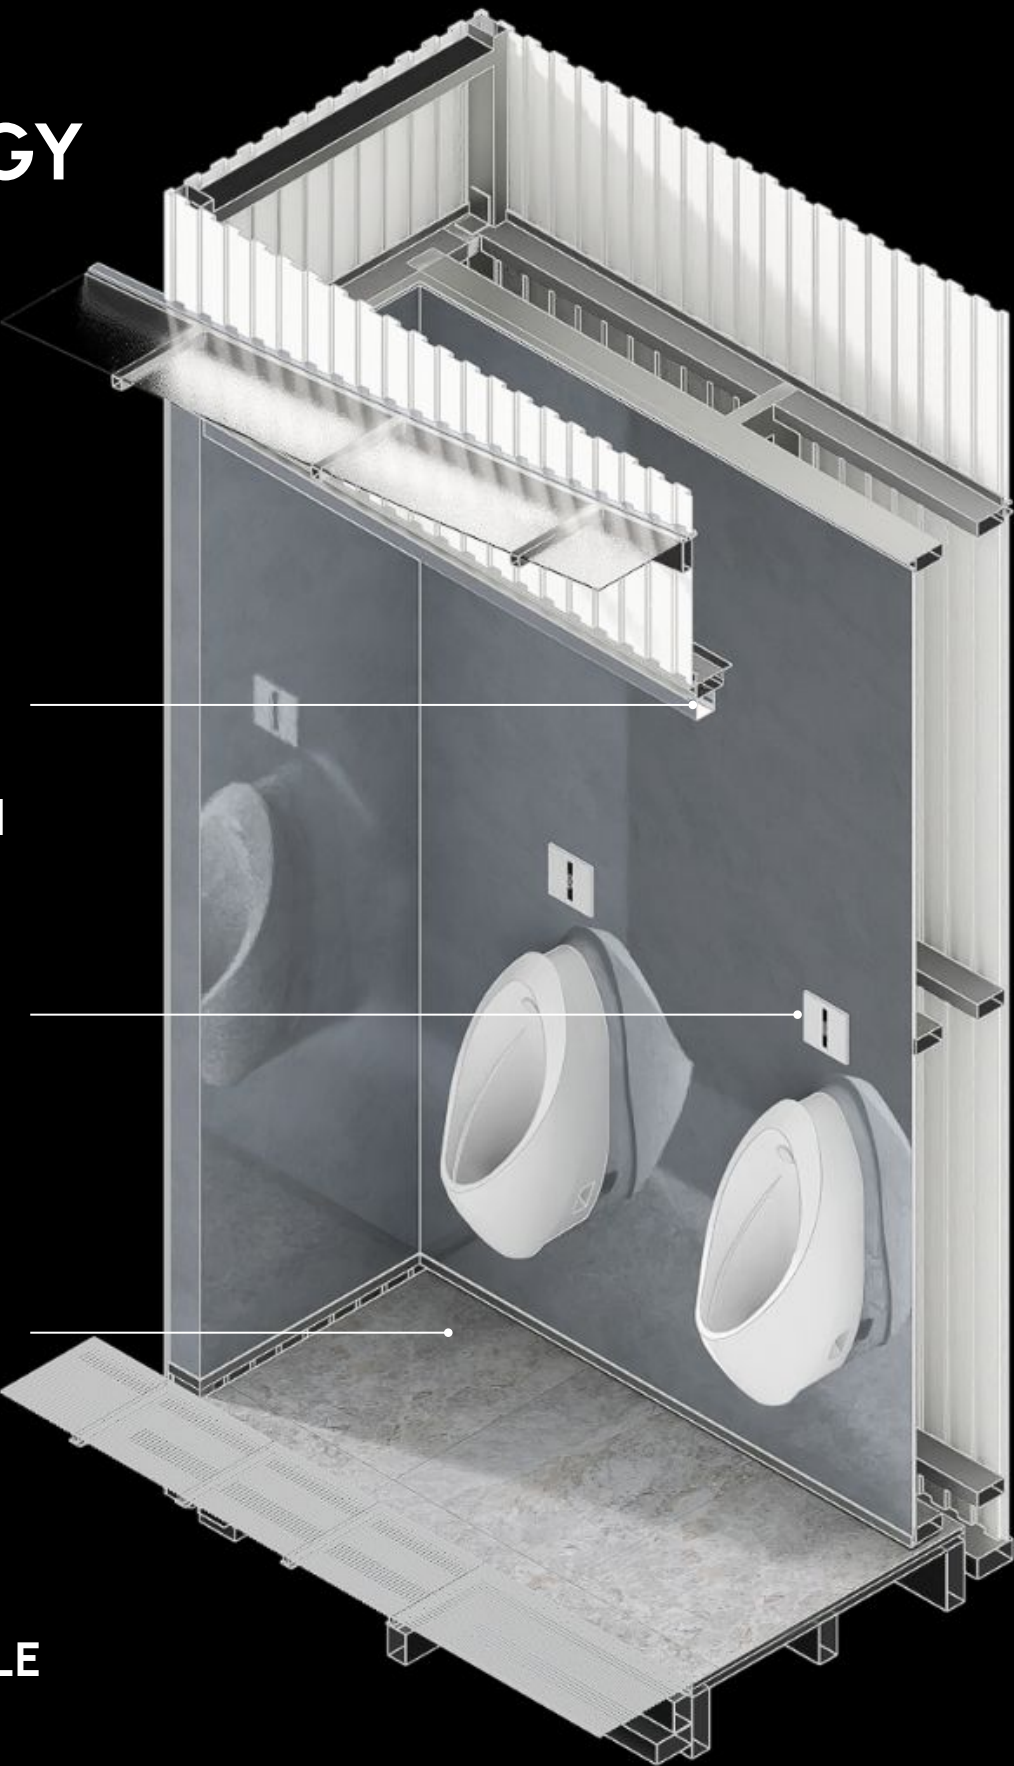

700 L
fiberglass
clean water
tank (vertical
type)

Water pump
for clean
water supply

ISOMETRIC
PUMP MODULE

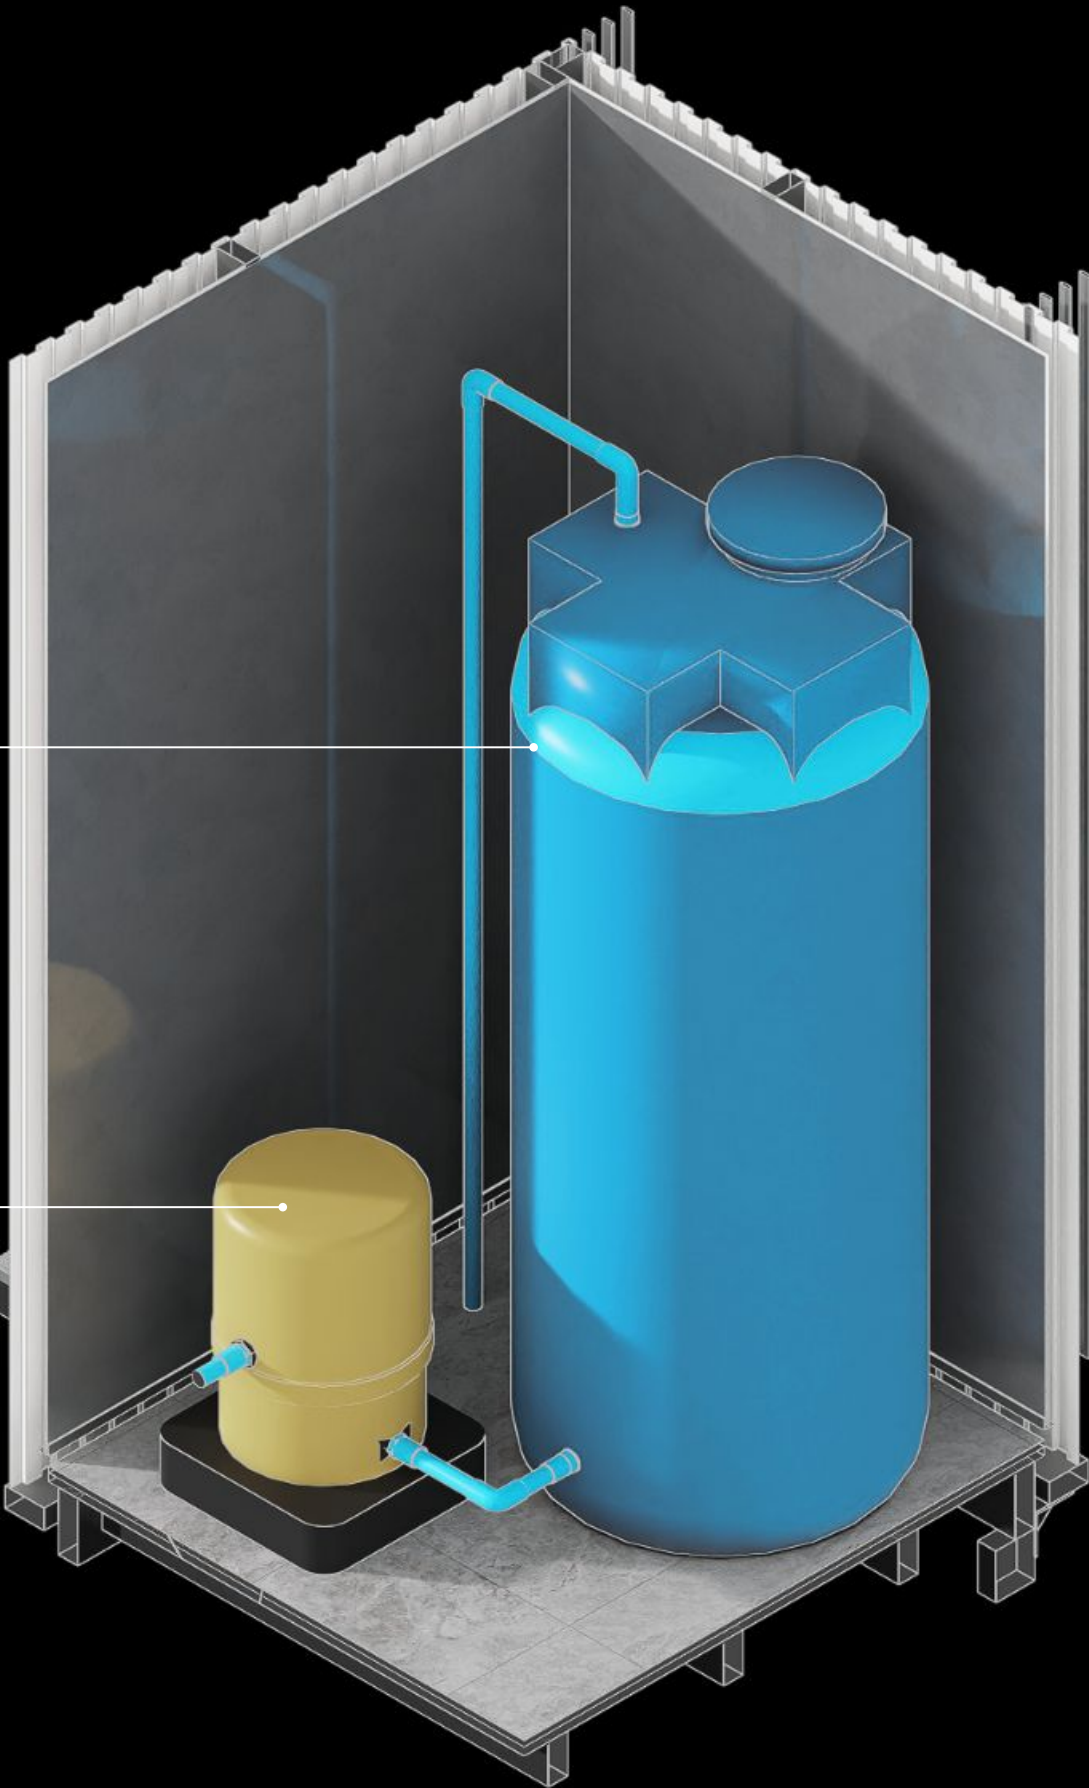

MODULE TYPOLOGY

10 mm thick gypsum board or cement board installed on galvanized steel subframe, laminated with faux stainless steel wall finishing


Custom-sized stainless steel mirror LED lamp, wall-integrated

Mirror-finish stainless steel wall panel

30 mm diameter stainless steel handrail for accessible use


Custom-fabricated stainless steel lavatory, fine grating top

20 mm thk cement board finished with granito tile (R > 10)

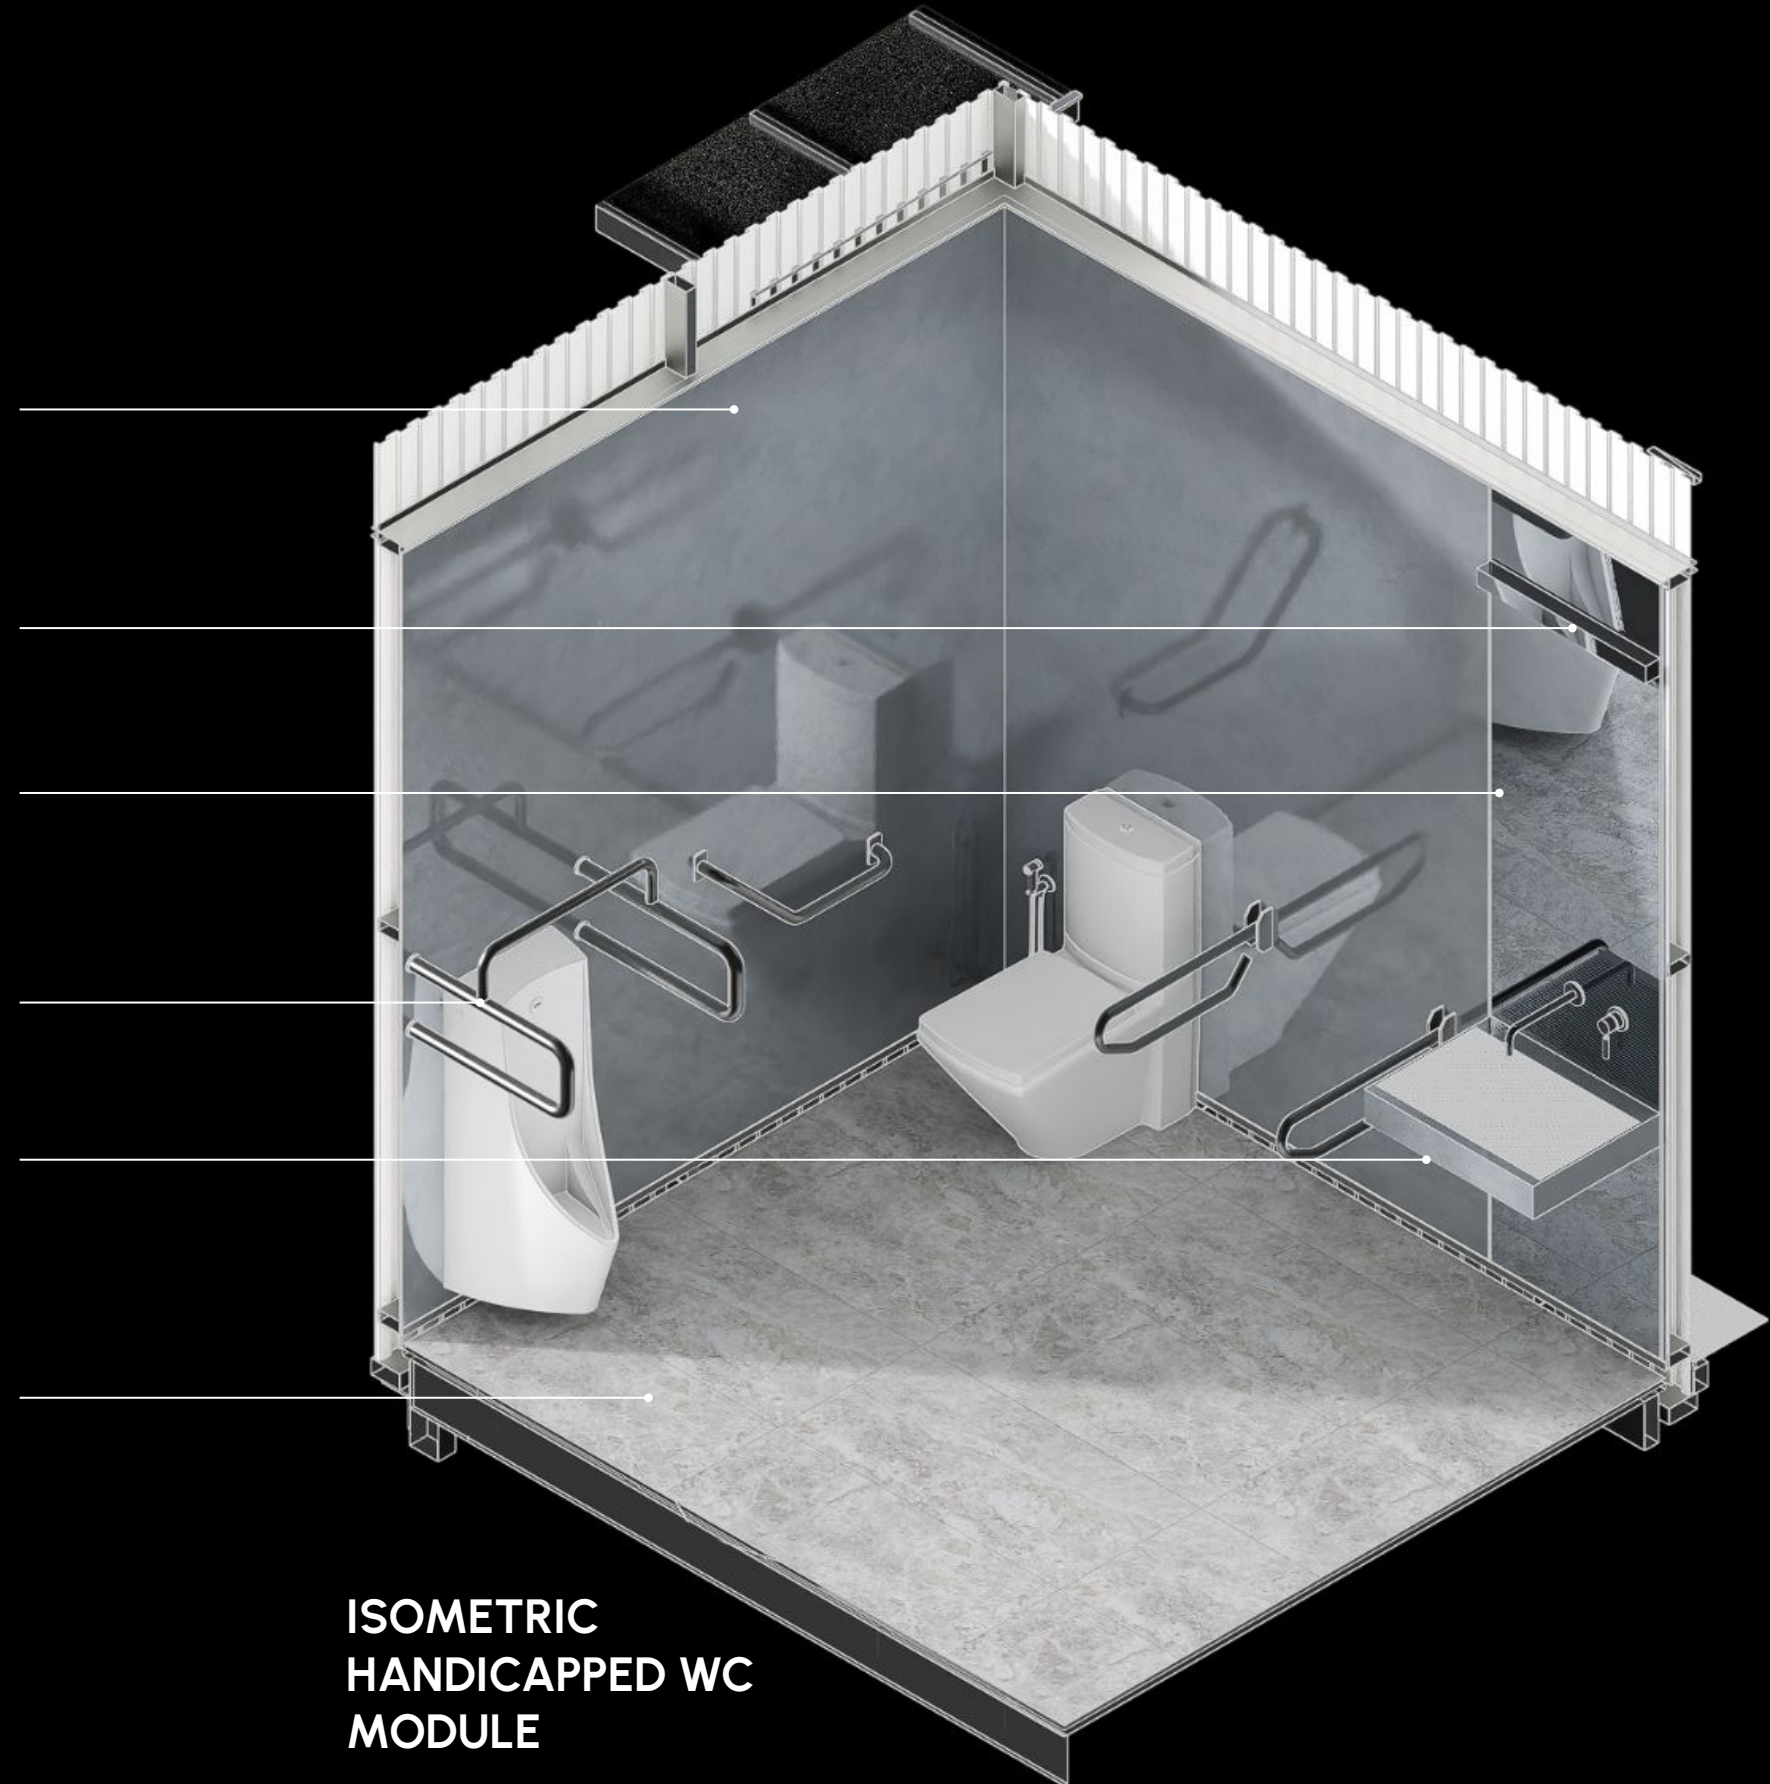

ISOMETRIC
HANDICAPPED WC
MODULE

SECTION 01



Varies roof level (max 4.40 m)

+2.70 Wall top level

+0.30 Floor level


+0.00 Ground level

DETAIL 02

DETAIL 01



SECTION 02



Varies roof level (max 4.40 m)

+2.70 Wall top level

+0.30 Floor level


+0.00 Ground level




DETAIL 03

DETAIL 01


The wall and floor panels are designed with an approximate 25mm **gap between them** to prevent trapped corners that can **lead to mold**. Additionally, this gap facilitates water **drainage** and allows for slight **air ventilation**.

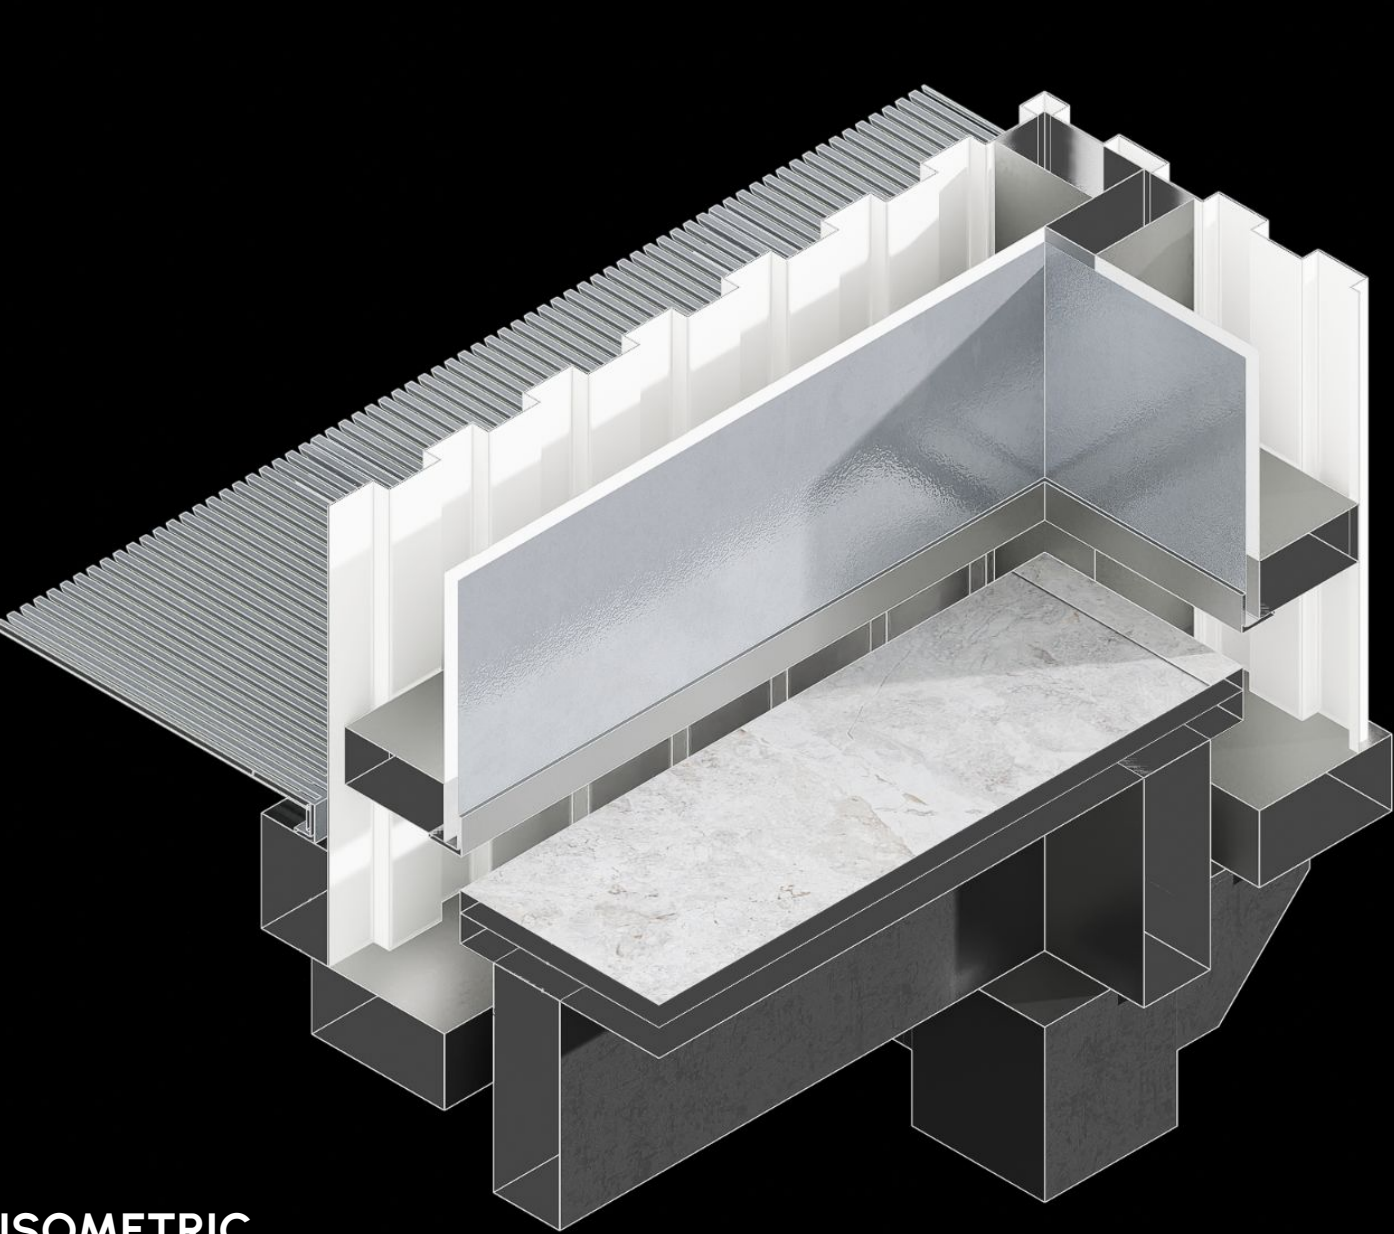

ISOMETRIC
WALL BOTTOM

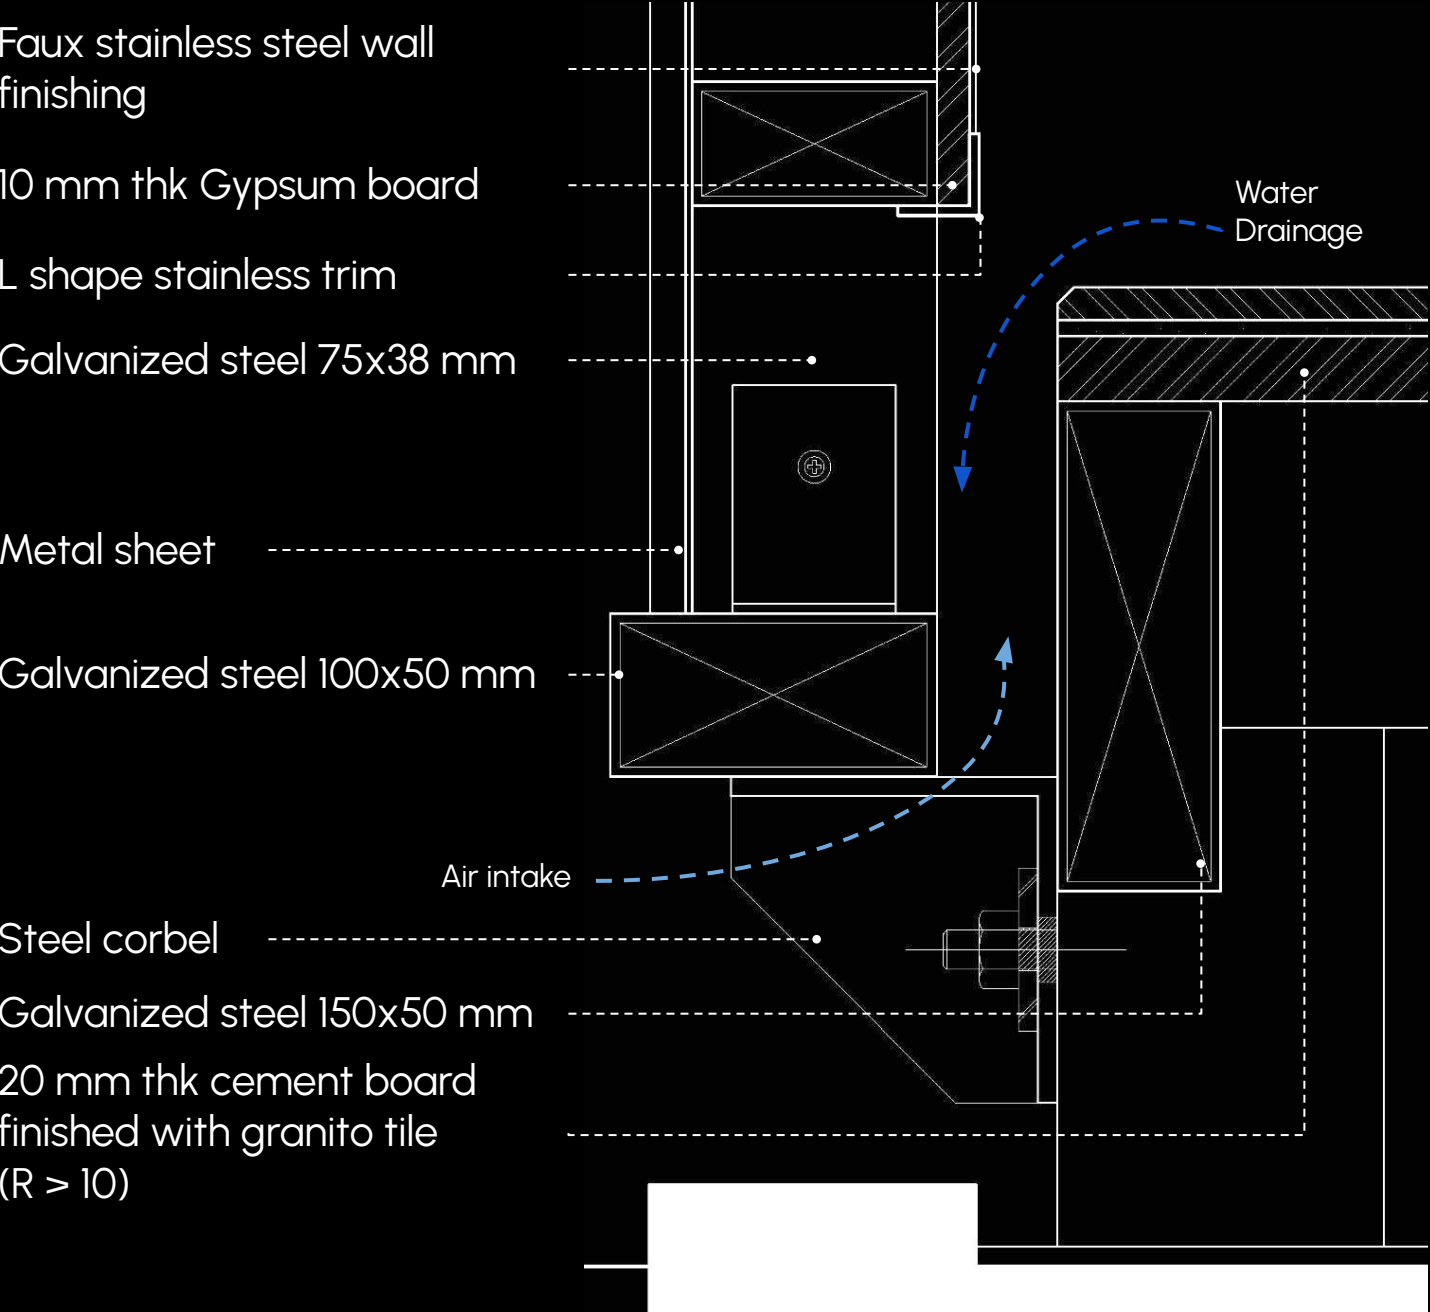


DETAIL 02

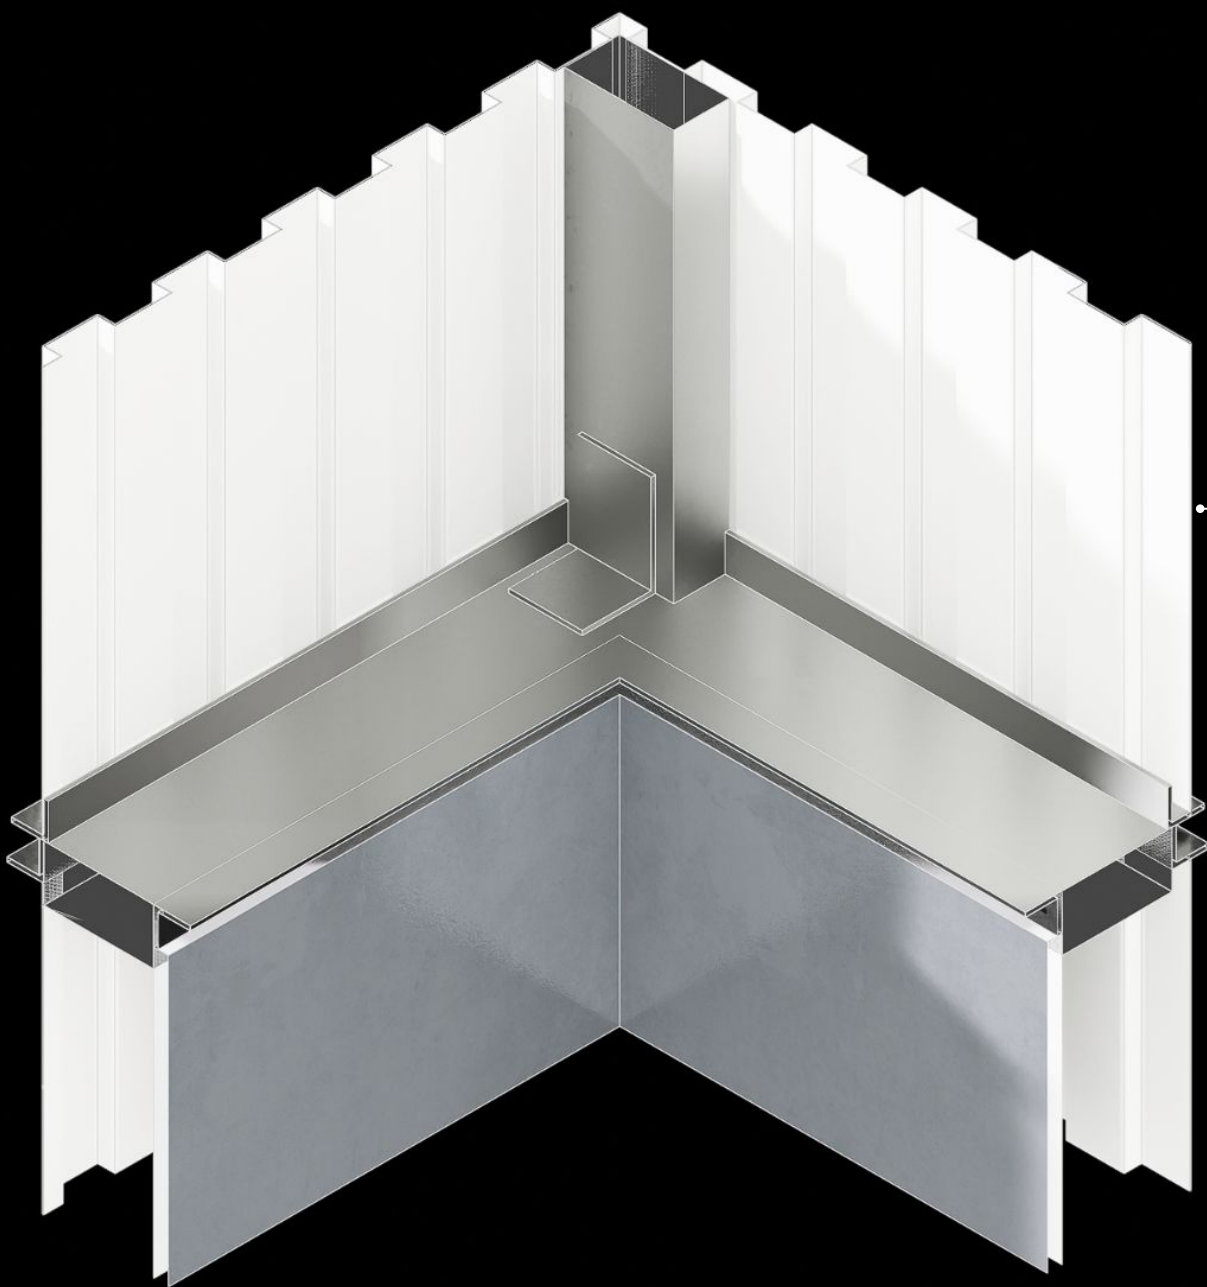


ISOMETRIC
WALL TOP

The lower module represents the room itself, fully **prefabricated** at the factory. The upper module is the roof, also prefabricated off-site, delivered in separate components, and **assembled directly on-site**.

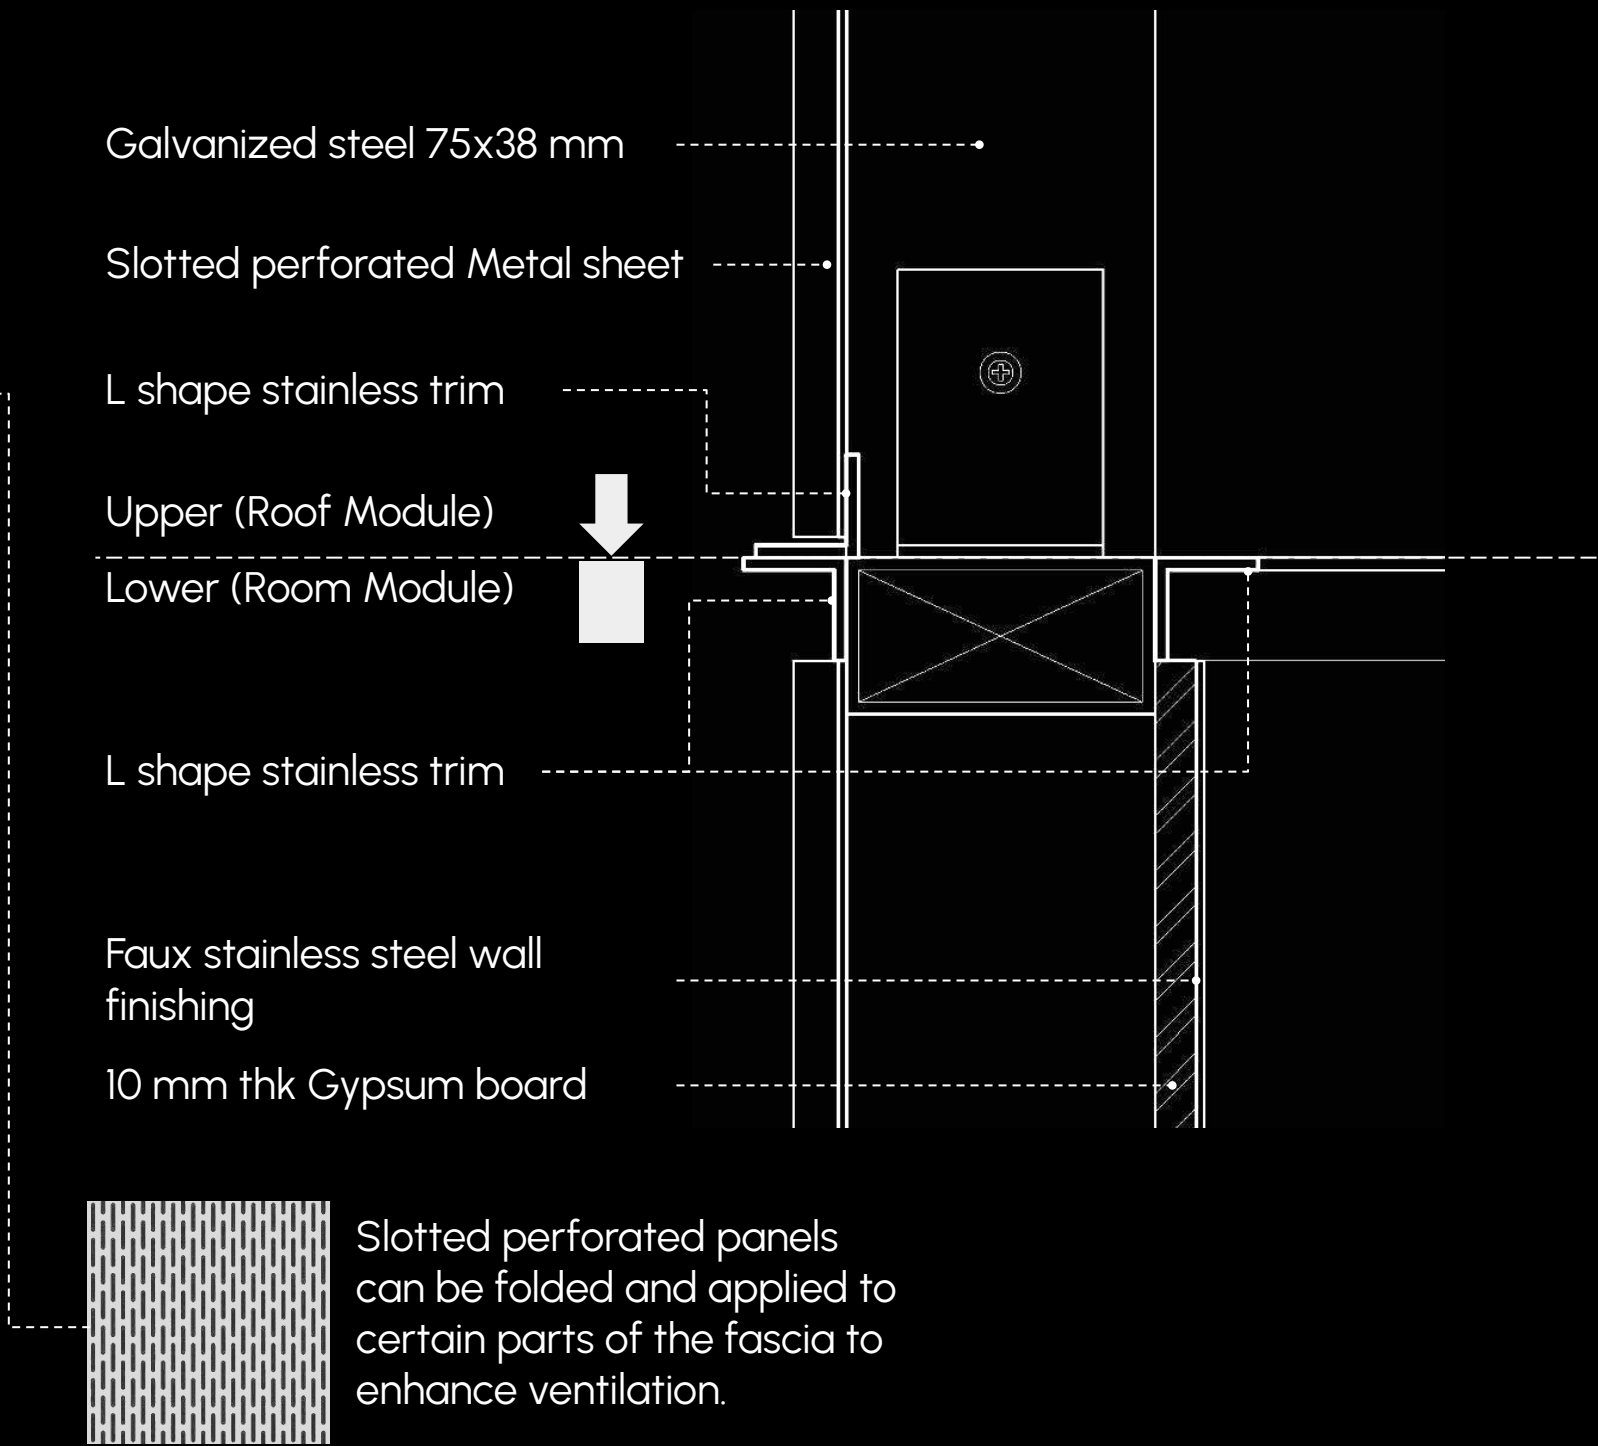


DETAIL 03

The **walkway platform** uses steel grating with 6mm openings. It will be **installed after** the room modules are in place, resting **on corbels or steel brackets** from the room modules.

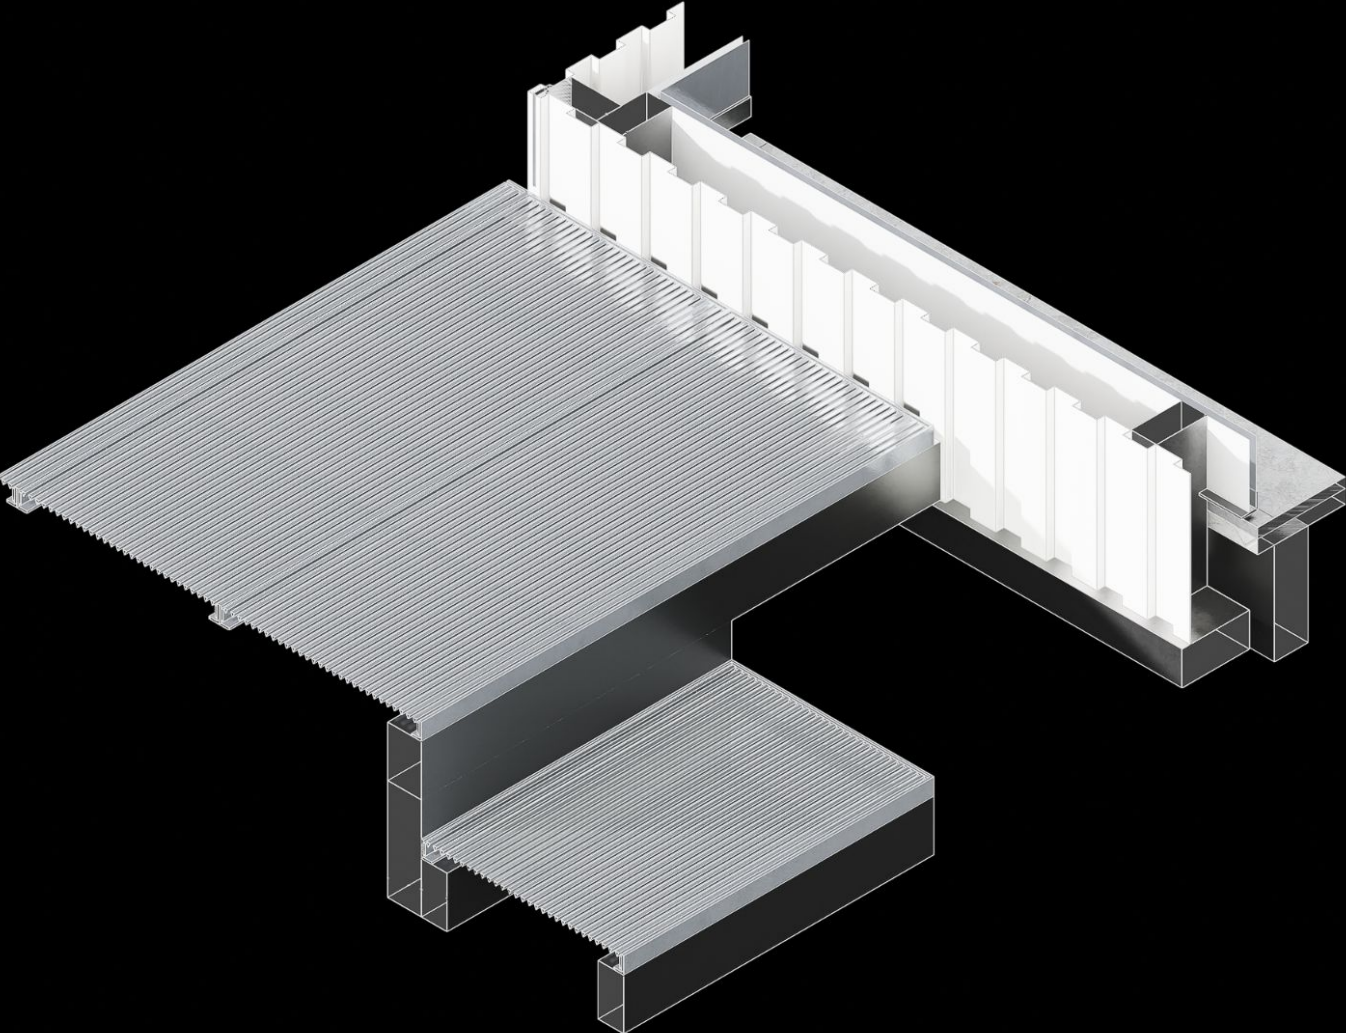

ISOMETRIC
STAIR DETAIL

- Steel grating with 6mm openings
- Galvanized steel 75x38 mm
- Galvanized steel 150x50mm
- Galvanized steel 75x38 mm
- Steel grating with 6mm openings

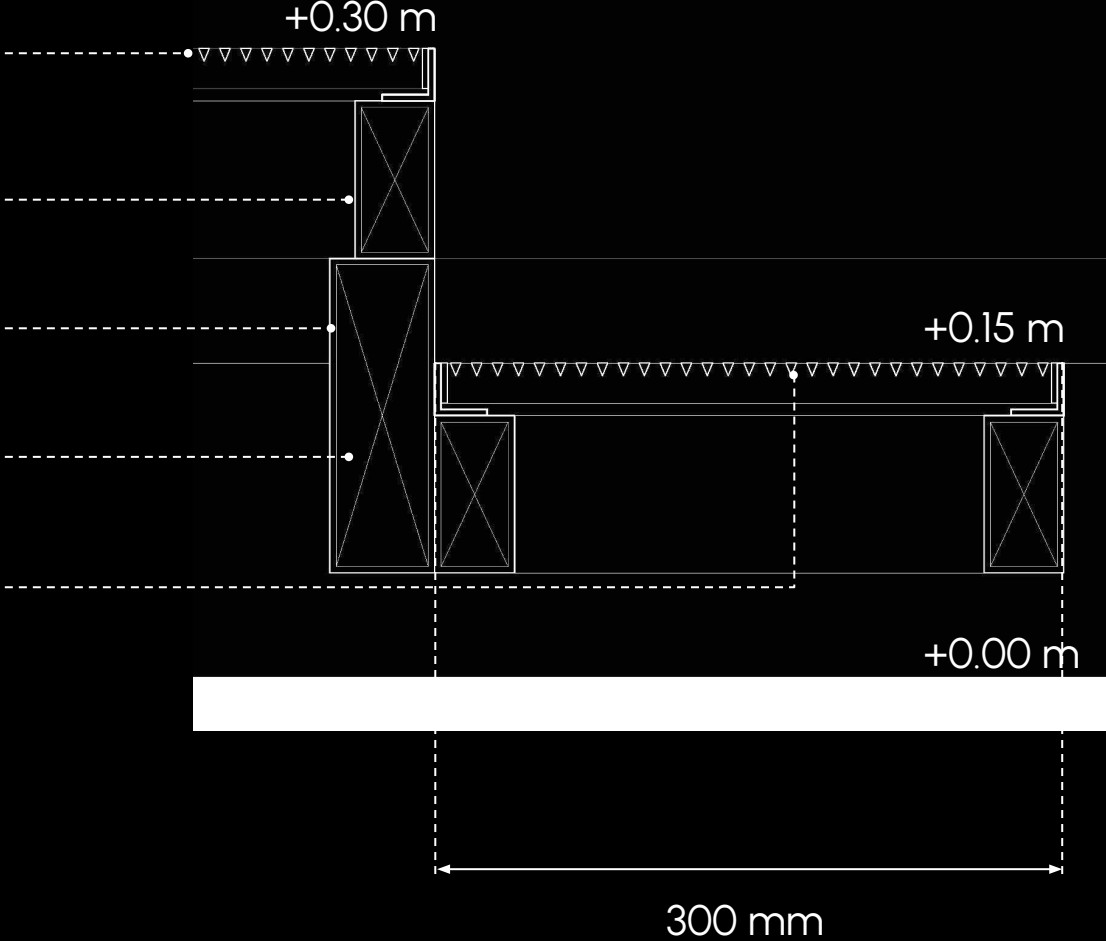

ELEVATION 01

+4.40 Roof level

+2.70 Wall top level

+0.30 Floor level

+0.00 Ground level



ELEVATION 02

+4.40 Roof level

+2.70 Wall top level

+0.30 Floor level

+0.00 Ground level



ELEVATION 03

+4.40 Roof level

+2.70 Wall top level

+0.30 Floor level

+0.00 Ground level



ELEVATION 04

+4.40 Roof level

+2.70 Wall top level

+0.30 Floor level

+0.00 Ground level











ANIMATION DOWNLOAD LINK :

<https://url.in.th/DIOgk>

OR

<https://drive.google.com/file/d/1MdS-6gkJNzhGbS0MZsgAOgJwv71MQOgs/view>

OR

