
DRAFT – NOT RELEASED
F1: Keystone 3568 holder + Littelfuse 0997030.WXN removable MINI fuse
*30 A preliminary; thermal/time–current qualification pending
C1: Murata GRM31C5C1H224JE02L, 220nF 50V C0G 5%
C1 reflow lands checked; physical fit, soldering and startup bench pending
F1 MINI 58V DC / replace power OFF; no 32V substitution

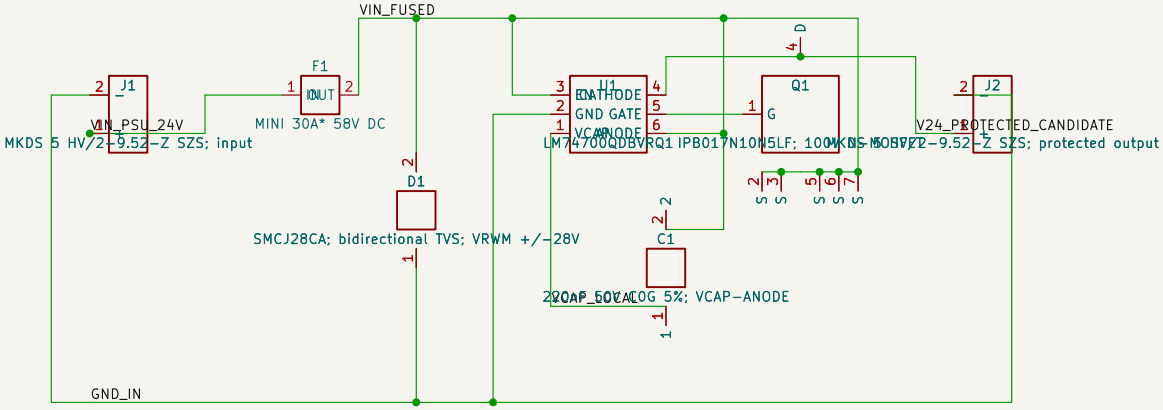

Sheet: /
File: input_protection_MINI_DRAFT.kicad_sch

Title:

Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.7		Id: 1/1